



FUNNEL ENTRY NYLON BUTT SPLICES

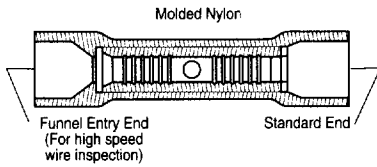


Wire Range AWG	Loose Piece Order No.	Mylar Tape Order No.	Maximum Length (in.)	Maximum Wire Insulation Diameter (in.)		Seam Type
				Funnel End	Standard End	
18-22 (0.80-0.35)	19202-0011	19202-0012	1.070	.147	.161	Seamless
14-16 (2.00-1.30)	19202-0027	19202-0029	1.070	.185	.199	Seamless
10-12 (5.00-3.30)	19202-0046	19202-0047	1.150	.262	.276	Seamless
18-22 (0.80-0.35)	19202-0063	19202-0007	1.070	.147	.161	Butted
14-16 (2.00-1.30)	19202-0019	19202-0021	1.070	.185	.199	Butted
10-12 (5.00-3.30)	19202-0039	19202-0041	1.150	.262	.276	Butted

WINDOW BUTT SPLICES



Wire Size AWG	Order No.			Maximum Length (in.)	Maximum Wire Insulation Diameter (in.)	Insulation Color
	Mil Spec	Loose Piece Order No.	Mylar Tape Order No.			
18-22 (0.80-0.35)	M7928/5-3	19199-0007	19199-0008	1.260	.140	Red
14-16 (2.00-1.30)	M7928/5-4	19199-0009	19199-0010	1.260	.170	Blue
10-12 (5.00-3.30)	M7928/5-5	19199-0011	19199-0012	1.620	.228	Yellow

STEP DOWN BUTT CONNECTORS

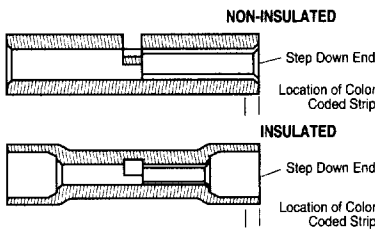

Wire Size AWG	Loose Piece Order No.	Mylar Tape Order No.	Insulation Color	CMA Range
14/16-18/22 (2.00/1.30-0.80/0.35)	19215-0013	19215-0017	Noninsulated	2050-5180 to 509-2600
10/12-14/16 (5.00/3.30-2.00/1.30)	19215-0023	19215-0027	Noninsulated	5180-13,100 to 2050-5180
8-10/12 (8.50-5.00/3.30)	19215-0037		Noninsulated	13,100-20,800 to 5180-13,100
6-8	19215-0042		Noninsulated	20,800-33,100 to 13,100-20,800
14/16-18/22 (2.00/1.30-0.80/0.35)	19154-0022	19154-0057	Blue with red stripe	2050-5180 to 509-2600
10/12-14/16 (5.00/3.30-2.00/1.30)	19154-0035	19154-0036	Yellow with blue stripe	5180-13,100 to 2050-5180
8-10/12 (8.50-5.00/3.30)	19154-0044		Red with yellow stripe	13,100-20,800 to 5180-13,100
6-8	19154-0047		Blue with red stripe	20,800-33,100 to 13,100-20,800

The Step Down Butt Splice is the perfect solution when 2 wires need to be inserted in one end of a splice and a single wire in the other end.