




This drawing is the property of  
Tucsonix, Inc., and may not be  
used, reproduced, published or  
disclosed to others without ex-  
pressed authorization by Tucsonix Inc.

**Electrical Testing  
per Tucsonix standard  
test plans and Mil-Std-202  
Test Methods.**

## **MARKETING SALES DRAWING**

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**

## DIMENSIONS IN METRIC - [ 1 ]

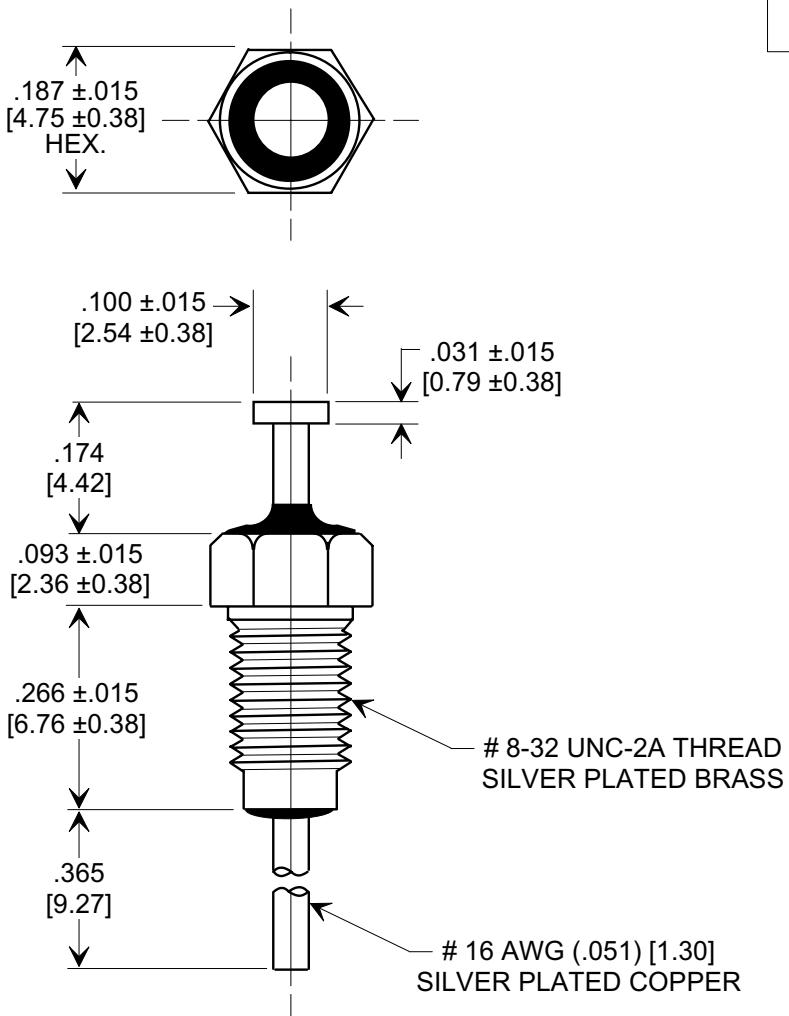

## SPECIFICATIONS

TUSONIX STYLE:	2425-032
CAP. VALUE:	5,000 pF
CAP. TOLERANCE:	GMV
TEMP. CHARACTERISTIC:	X7W
RATING:	200 VDC @ + 85°C/100 VDC @ +125°C
OPERATING RANGE:	100 VDC @ + 125°C
IR MIN. @ 100 VDC:	10 G Ω
DWV VDC:	600

## NOTES:

1. SUPPLIED WITH SILVER PLATED HEX NUT AND LOCK WASHER.
  2. MOUNTING TORQUE NOT TO EXCEED 5 lb-in. [.565 Nm].
  3. TUSONIX STANDARD PART NUMBER:  
2425-032-X7W0-502AA. TUSONIX RoHS COMPLIANT PART NUMBER:  
2425-032-X7W0-502AA LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
  4. PART MARKING: STANDARD PART: BLACK INK FOR TRADEMARK AND CAP. CODE. RoHS PART: GREEN INK FOR TRADEMARK AND CAP. CODE.

**--TOLERANCES--**

### Specimens

GES +

**FUSONIX**  
PHOENIX, ARIZONA

Title	<b>MINIATURE BUSHING FEED-THRU</b>	
Drawn	S.M. 03-27-07	Scale <b>4 X</b>
Approved	R.L. 03-27-07	
<b>A</b>	<b>2425-032-X7W0-502AA</b>	