



12-PORT 10-GbE/HIGIG2™ MULTILAYER SWITCH

FEATURES

- 12 HiGig2™/HiGig+™/HiGig™/10-GbE/1-GbE ports
- Based on StrataXGS® field-proven, robust architecture
- Integrated high-performance SerDes
 - Integrated XAUI™ SerDes for all 12 ports
 - Uses single SerDes lane per port at GbE speeds
- 144-Gbps switching capacity at line rate
- Support for eight classes of service (CoS) plus two additional classes for flow control and system management per port
- Support for deficit round robin, weighted round robin, and strict priority scheduling
- Support for a cut-through switching mode
- Port trunking and remote mirroring support
- Fully integrated data and address memory on a single chip
- Advanced packet flow control
 - Head-of-line (HOL) blocking prevention
 - Full-duplex flow control (802.3x)
- ContentAware™ network processing per port
 - Line rate multifield packet classification
 - Supports IEEE 802.1p, type of service (ToS)/DiffServ, rate limiting, policing, priority tagging, and remapping
 - Extended security and ACL filtering
- Full IPv6 routing support
- Enhanced security and management capabilities
- Low power consumption


SUMMARY OF BENEFITS

- High level of integration and low power consumption enable system vendors to build high-performance, high-port-density 10-Gigabit Ethernet switches in the same form factor as existing GbE solutions
- Built-in, high-speed serial interfaces with integrated memory ease and accelerate system design, while reducing cost and conserving board space
- Built-in Layer 3 routing support enables embedded switch to become an extension of the enterprise core network
- Advanced load balancing and strong user isolation features facilitate the implementation of utility computing services
- Integrated security features and enhanced management capabilities improve network reliability and lower cost of ownership for BCM56803-based solutions
- Broadcom switch API compatibility enables software reuse and faster time-to-market


APPLICATIONS

- Embedded switch in next-generation 10-GbE blade servers
- 10-GbE/1-GbE switching engine in Advanced TCA chassis platforms
- Multilayer switch in high-density 10-GbE switches

BCM56803 Block Diagram

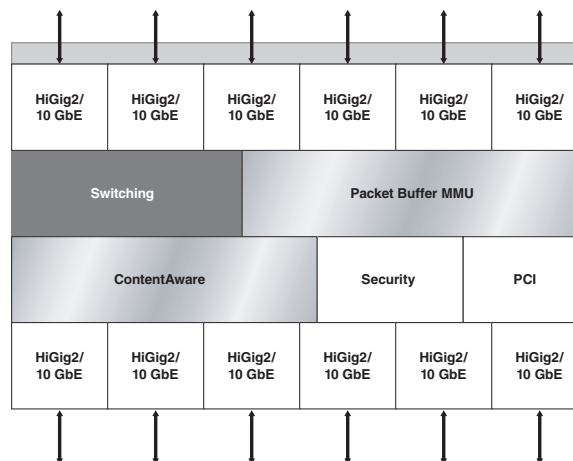

OVERVIEW

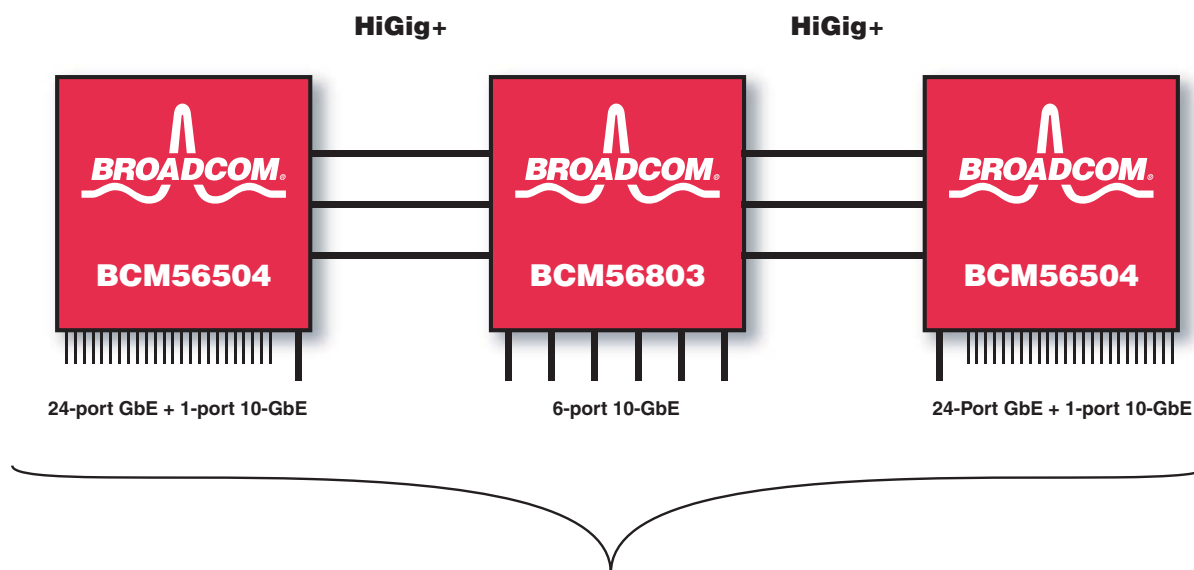

48-Port GbE + 6-Port 10-GbE Switch with BCM56803 and BCM56504

The BCM56803 network switch is a high-density 10-Gigabit Ethernet switching chip solution with 12 ports. All 12 ports can flexibly support HiGig2/HiGig+/HiGig/10-GbE/1-GbE. Additionally, the BCM56803 integrates all the SerDes required to interface with applicable copper and fiber physical fabrics.

The integrated SerDes functionality includes 10-Gbps XAUI and 1-Gbps SGMII PHY interfaces. The integrated SerDes complies with the CX-4 standard and PICMG3.1 standard, which ensures interoperability with Ethernet line cards in an Advanced TCA chassis.

With 144 Gbps of aggregate switching bandwidth, the BCM56803 has the highest level of Ethernet switching integration in the industry. This integration allows embedded switching vendors to provide next-generation products at 10-GbE speeds and is an ideal fit into current design form factors. This capability has many benefits, including reducing vendor development cost and adding value to current generation systems through upgradability.

The BCM56803 device's low power dissipation simplifies board design and optimizes vendor board space.

The advanced ContentAware engine supports ToS/DiffServ, policy-based routing, priority tagging, and remapping. The advanced packet filtering and classification functions of the BCM56803 make it a seamless fit utility for computing applications where user segregation and network security is critical.

In addition, the BCM56803 provides advanced security features that improve network resiliency and reliability. Moreover, the BCM56803

features advanced load-balancing functionality that uses flow information to provide high percentage link utilization.

The BCM56803 supports Layer 2 switching with 4K VLANs, IPv4, and IPv6 full routing functionality, enabling it to be a direct extension of the enterprise network. This functionality provides additional customer value by eliminating the hardware and management costs of maintaining intermediate routers.

As the latest member of the StrataXGS switch family, the BCM56803 software development kit preserves software continuity with Gigabit Ethernet switches, reducing development cost and shortening the product time-to-market.

The BCM56803 implements congestion handling features such as Congestion Notification and IEEE 802.3x flow control.

In addition to a 32-bit PCI interface used to communicate with a local CPU, the BCM56803 supports an I²C controller, which communicates with external devices such as serial EEPROM, flash memories, and parallel port devices.

The BCM56803 relies on Broadcom's modular switching architecture to provide intelligent packet processing, network security, and enhanced manageability at a low cost. The BCM56803 is an ideal solution for next-generation, high-speed embedded switching applications, such as blade servers and Advanced TCA computer platforms.

Together with the BCM56500 series, the BCM56803 can be used to build cost-effective, high-density GbE and 10-GbE switches.

Broadcom[®], the pulse logo, Connecting everything[®], the Connecting everything logo, HiGig[™], HiGig+[™], HiGig2[™], ContentAware[™], and StrataXGS[®] are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Any other trademarks or trade names mentioned are the property of their respective owners.

Connecting
everything[®]



BROADCOM CORPORATION
16215 Alton Parkway, P.O. Box 57013
Irvine, California 92619-7013

© 2006 by BROADCOM CORPORATION. All rights reserved.

56803-PB01-R 03/24/06

Phone: 949-450-8700
Fax: 949-450-8710
E-mail: info@broadcom.com
Web: www.broadcom.com