



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

50A HIGH CURRENT SILICON BRIDGE RECTIFIERS


BP50-005G THRU BP50-10G

FEATURES

- CURRENT RATING 50A
- REVERSE VOLTAGE RATING UP TO 1000V
- TYPICAL IR LESS THAN 1μA
- HIGH TEMPERATURE SOLDERING GUARANTEED:
260°C /10 SECOND
- GLASS PASSIVATED CHIP JUNCTION

MECHANICAL DATA

- CASE: METAL HEAT SINK CASE, ELECTRICALLY INSULATED
DIMENSIONS IN INCHES AND (MILLIMETERS)
- TERMINALS: UNIVERSAL .25" (6.3mm) FAST ON
- MOUNTING METHOD: BOLT DOWN ON HEAT SINK WITH
SILICON THERMAL COMPOUND BETWEEN BRIDGE AND
MOUNTING SURFACE FOR MAXIMUM HEAT TRANSFER
EFFICIENCY
- WEIGHT: 20 GRAMS

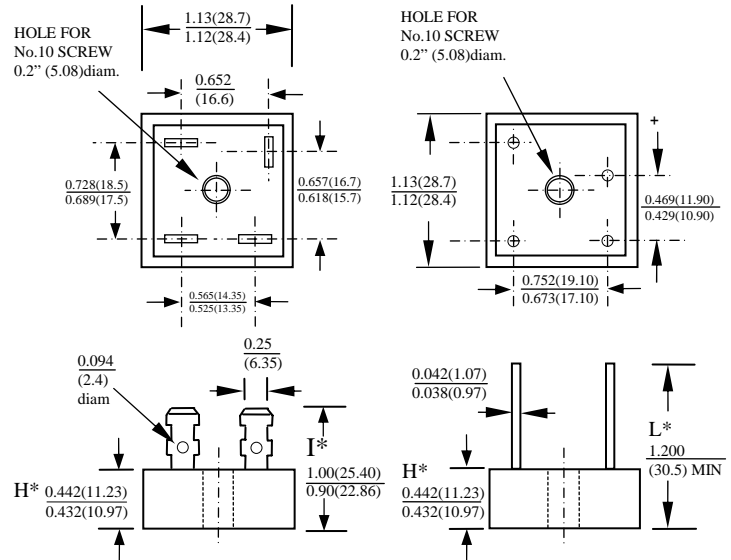

DIM	MIN	MAX	REMARK
H*	0.295(7.5)	0.311(7.9)	SUFFIX "S" THIN CASE
I*	0.74(18.80)	0.84(21.30)	SUFFIX "S" THIN CASE
L*	1.09(27.89)	-	SUFFIX "S" THIN CASE

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	BP50 -005G	BP50 -01G	BP50 -02G	BP50 -04G	BP50 -06G	BP50 -08G	BP50 -10G	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V _{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V _{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V _{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED OUTPUT CURRENT AT TC=55°C	I _O	50.0							A
PEAK FORWARD SURGE CURRENT SINGLE SINE-WAVE SUPERIMPOSED ON RATED LOAD	I _{FSM}	550							A
STORAGE TEMPERATURE RANGE	T _{STG}	- 55 TO + 175							°C
OPERATING TEMPERATURE RANGE	T _{OP}	- 55 TO + 175							°C

ELECTRICAL CHARACTERISTICS (A_T T_A =25°C UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	BP50 -005G	BP50 -01G	BP50 -02G	BP50 -04G	BP50 -06G	BP50 -08G	BP50 -10G	UNITS
MAXIMUM INSTANTANEOUS FORWARD VOLTAGE PER BRIDGE ELEMENT AT SPECIFIED CURRENT	V _F	1.1							V
MAXIMUM REVERSE DC CURRENT AT RATE DC BLOCKING VOLTAGE PER ELEMENT	I _R	10							μA

NOTE: Suffix No. Versus Different Cases And Terminals

CASE SUFFIX No TERMINAL	NORMAL METAL CASE	THIN METAL CASE	NORMAL PLASTIC CASE ALUMINUM BASE	THIN PLASTIC CASE ALUMINUM BASE
FAST ON TERMINALS	NO SUFFIX	S	P	PS
WIRE LEAD TERMINALS	W	WS	PW	PWS
IN LINE PIN CONFIGURATION	-	-	L	LS

RATINGS AND CHARACTERISTIC CURVES BP50-005G THRU BP50-10G

FIG 1 MAXIMUM OUTPUT RECTIFIED CURRENT

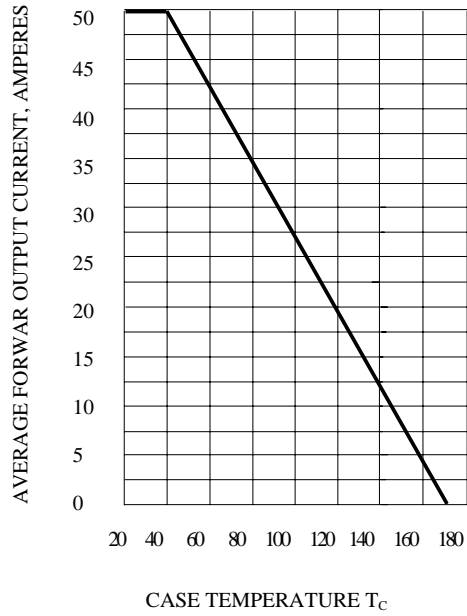


FIG 2 TYPICAL REVERSE CHARACTERISTICS AT T_J=25°C

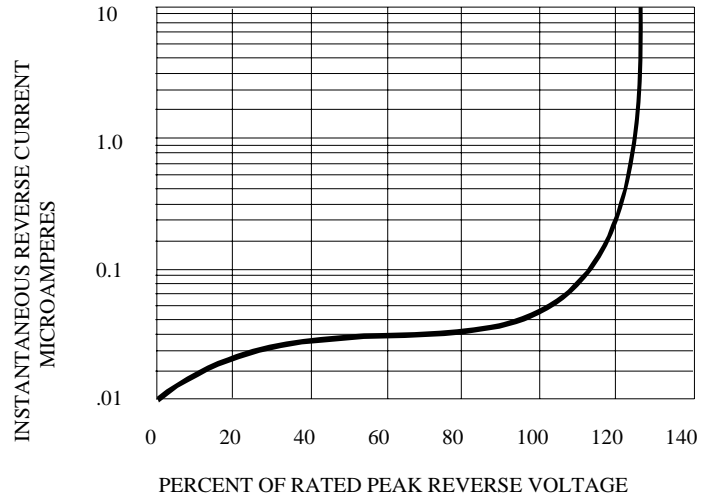


FIG 3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS



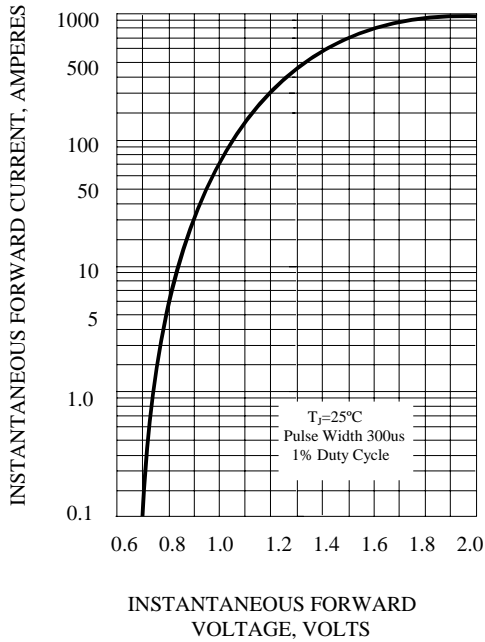


FIG 4 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

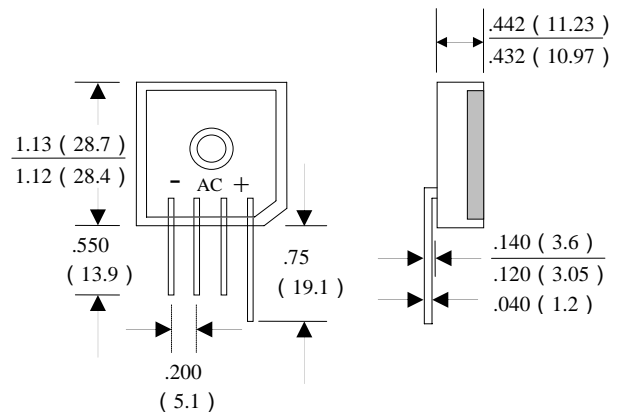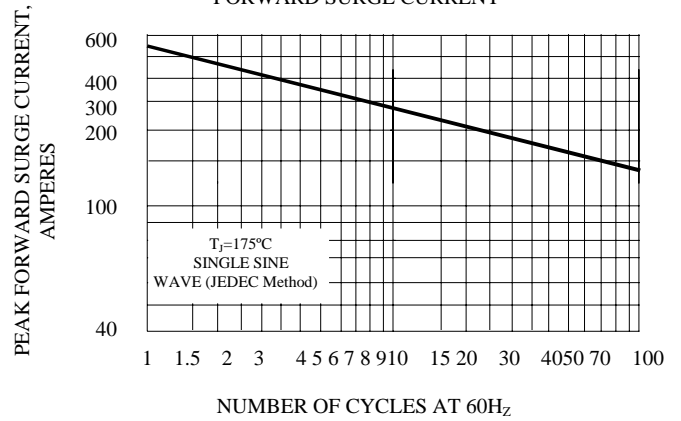

BP50-L IN LINE PIN CONFIGURATION (PLASTIC CASE)