




Dual Ultrafast Plastic Rectifiers

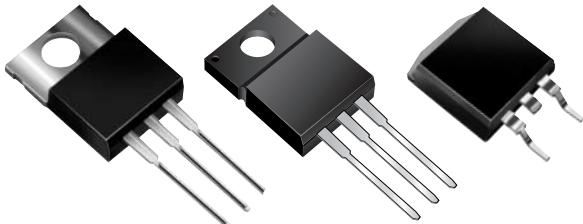

TO-220AB (FEP6AT Series)

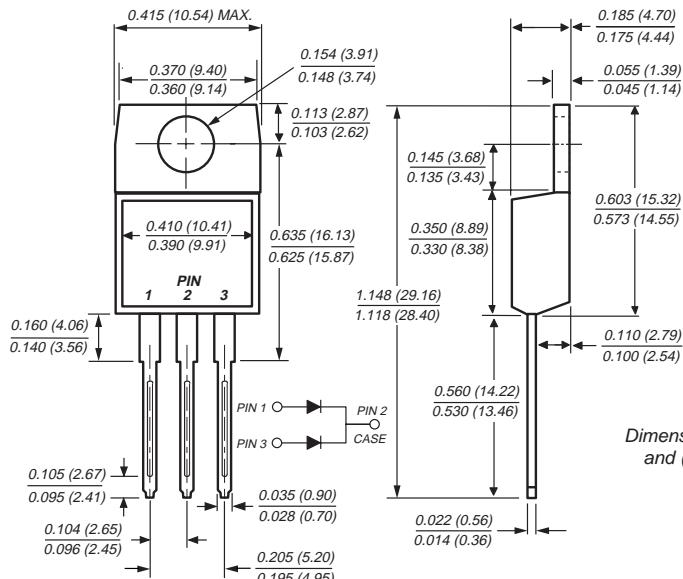

Mounting Pad Layout TO-263AB

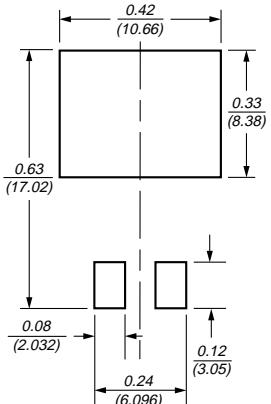


Features


- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
 - Dual rectifier construction, positive center-tap
 - Glass passivated chip junctions
 - Superfast recovery times for high efficiency
 - Low power loss
 - Low forward voltage, high current capability
 - For use in low voltage, high frequency inverters, free wheeling and polarity protection applications

Reverse Voltage 50 to 200V
Forward Current 6.0A
Reverse Recovery Time 35ns

ITO-220AB (FEPF6AT Series)

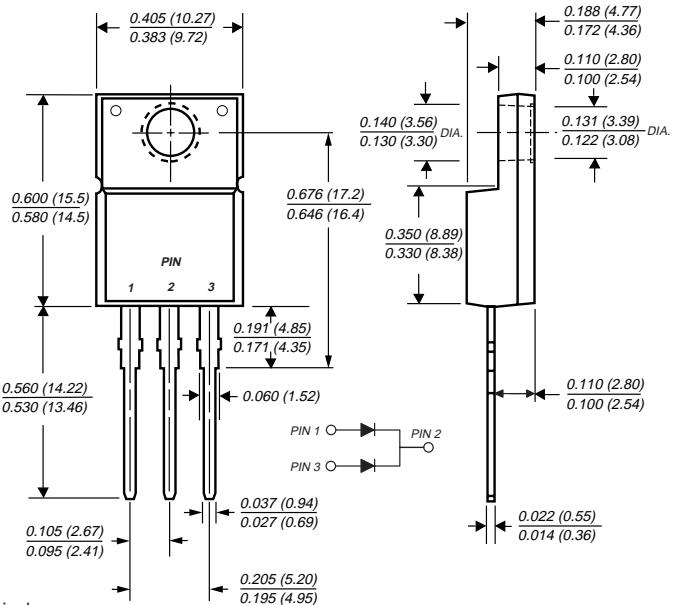

TO-263AB (FEPB6AT Series)

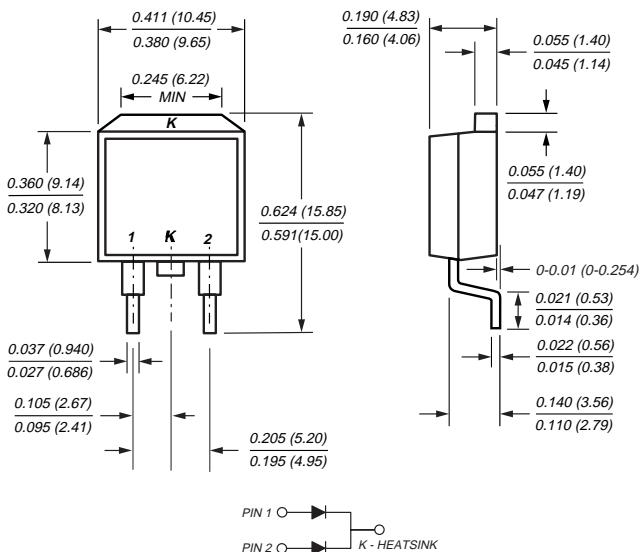

Mechanical Data

Case: JEDEC TO-220AB, ITO-220AB & TO-263AB
molded plastic body

Terminals: Plated leads, solderable per
MIL-STD-750, Method 2026
High temperature soldering in accordance with
CECC 802 / Reflow guaranteed

Polarity: As marked **Mounting Position:** Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 oz., 2.24 g

FEP6DT, FEPF6DT, FEPB6DT Series

Vishay Semiconductors
formerly General Semiconductor



Maximum Ratings (T_c = 25°C unless otherwise noted)

Parameter	Symbol	FEP6AT	FEP6BT	FEP6CT	FEP6DT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	150	200	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	V
Maximum average forward rectified current at T _c = 105°C	I _{F(AV)}		6.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I _{FSM}		100			A
Operating junction and storage temperature range	T _J , T _{TSG}		–55 to +150			°C
RMS Isolation voltage (FEPF) from terminals to heatsink with t = 1.0 second, RH ≤ 30%	V _{ISOL}		4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾			V

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	FEP6AT	FEP6BT	FEP6CT	FEP6DT	Unit
Maximum instantaneous forward voltage at 3.0A	V _F		0.975 ⁽⁴⁾			V
Maximum DC reverse current at rated DC blocking voltage per leg	I _R		5 50			µA
Maximum reverse recovery time per leg at I _F = 0.5A, I _R = 1.0A, I _{rr} = 0.25A	t _{rr}		35			ns
Typical junction capacitance per leg at 4V, 1MHz	C _J		28			pF

Thermal Characteristics (T_c = 25°C unless otherwise noted)

Parameter	Symbol	FEP6	FEPF6	FEPB6	Unit
Typical thermal resistance from junction to case per leg	R _{θJC}	3.6	5.1	3.6	°C/W

Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9mm (0.19")
- (4) Pulse test: 300µs pulse width, 1% duty cycle

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Maximum Forward Current Derating Curve

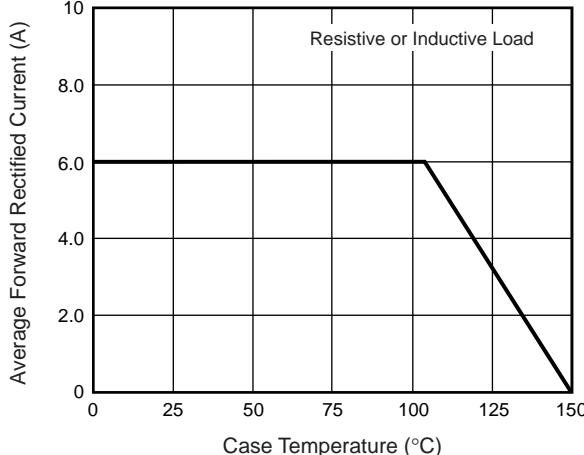


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

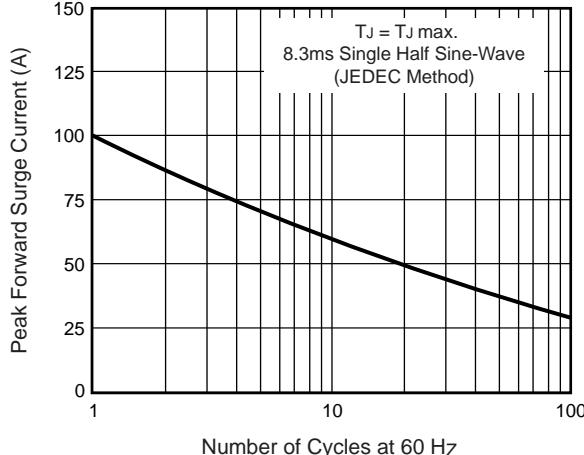


Fig. 3 – Typical Instantaneous Forward Characteristics

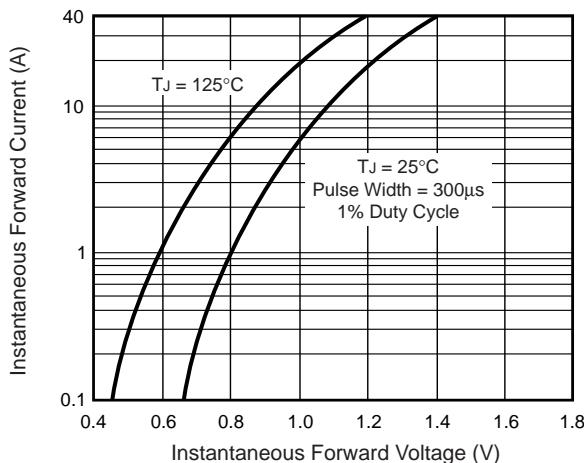


Fig. 4 – Typical Reverse Leakage Characteristics

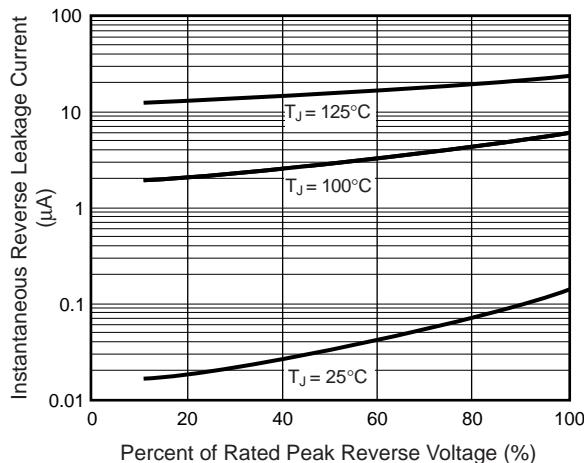


Fig. 5 – Typical Junction Capacitance

