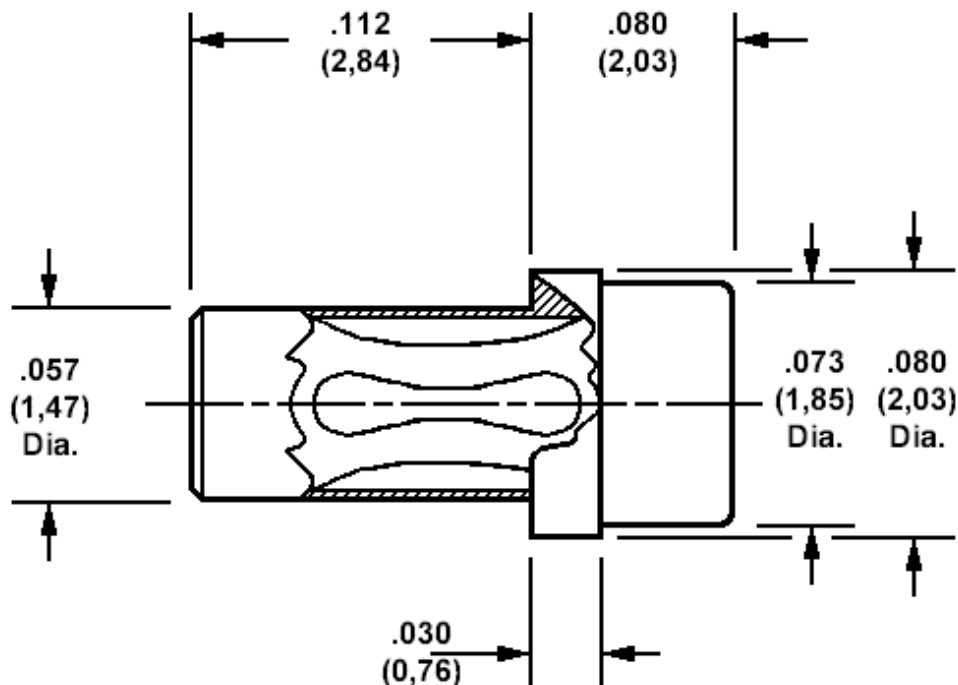


**450-3230 Solder mount socket, for .025 (0,64) diameter pins**Recommended mounting hole .062 (1,57)  $\pm$ .002 (0,05)

Min hole depth .150 (3,81)

**How to order code****450-3230-01-XX-00****Basic Part No XX = Finish**

| MATERIALS |                  |                  |             |                  |
|-----------|------------------|------------------|-------------|------------------|
| Component | Material         | Finish(-03)      | Finish(-04) | Finish(-06)      |
| Body      | Brass            | Gold over Nickel | Tin         | Tin              |
| Spring    | Beryllium copper | Gold over Nickel | Tin         | Gold over Nickel |