


CERAMIC SURFACE-MOUNT  
SAW FILTER  
**AFS418E**



5.0 x 5.0 x 1.35mm

**FEATURES:**


- SAW Filter 418.00MHz.
- Low Loss, Compact.
- SMD makes reflow soldering possible.
- Gold plated terminals.

**COMMON APPLICATIONS:**

- Wireless car alarm, Garage door opener. (RKE)
- Mobile communications systems

**ABSOLUTE MAXIMUM RATINGS:**

DC voltage	12Vdc
Operating temperature	-35°C to +85°C
Maximum power dissipation	10dBm

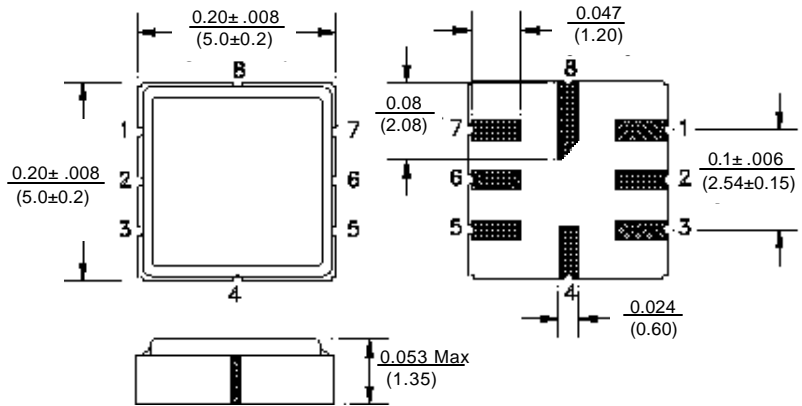


Dimensions: Inches (mm)

STANDARD SPECIFICATIONS					
CHARACTERISTICS	UNIT	min.	typ.	max.	
Center frequency	F <sub>c</sub>	MHz	-	418.00	-
Insertion loss	IL	dB	-	3.5	5.0
3dB Passband	BW3	kHz	-	600	-
Stopband attenuation	at F <sub>C</sub> -21.4MHz	dB	40	50	-
	at F <sub>C</sub> -10.7MHz	dB	15	30	-
	Ultimate		-	80	-
Turn-over temperature	T <sub>o</sub>	°C	24	39	54
Temperature coefficient	T <sub>c</sub>	ppm/C <sup>2</sup>	-	0.032	-
Aging absolute first year	[A]	ppm	-	-	10

Pin No.	Function
1	Input
2	Input GND
5	Output
6	Output GND
3, 7	To be GNDed
4, 8	Case GND

**Maching circuit to 50 W**


C1=C2=15pF, L1=L2=68 nH

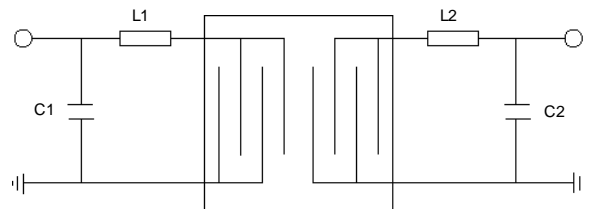

**Marking:**

AFS  
418E

Packaging option: -T for tape and reel, see appendix H.  
Reflow profile, see appendix E. Reliability specifications, see SAW application notes.

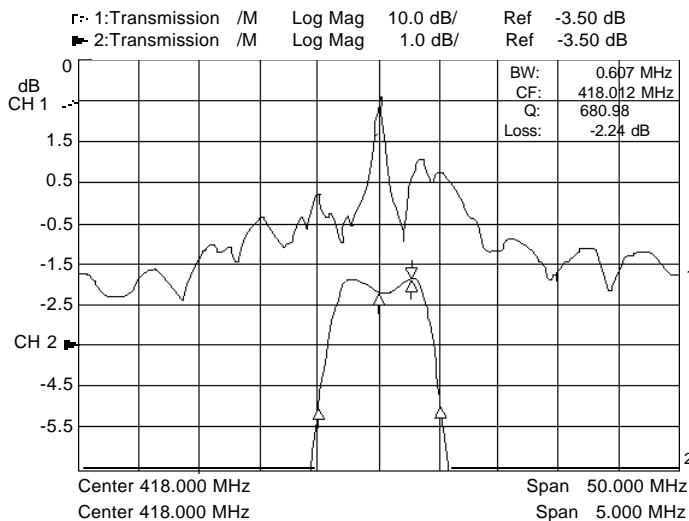

NOTE: All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA  
(949) 448-7070 • FAX: (949) 448-8484

E-MAIL: [abinfo@abracon.com](mailto:abinfo@abracon.com) • INTERNET ADDRESS: [www.abracon.com](http://www.abracon.com)

ABRACON IS  
ISO 9001 / QS 9000  
CERTIFIED