



DC COMPONENTS CO., LTD.

INTEGRATED CIRCUIT

DE7805
DE7805A

TECHNICAL SPECIFICATIONS OF 3-Terminal Positive Voltage Regulator

Description


These regulators employ internal current limiting and thermal shutdown, making them essentially indestructible. They can deliver over 1A output current with adequate heatsinking. They are intended as fixed voltage regulators in a wide range of applications including local, on-card regulation for elimination of noise and distribution problems associated with single-point regulation.

Pinning

- 1 = Input
- 2 = Ground
- 3 = Output

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$)

Characteristic	Symbol	Rating	Unit
Input Voltage	V_I	35	V
Total Power Dissipation	P_D	Internal limit	W
Operating Temperature Range	T_{OPR}	0 to +125	$^\circ\text{C}$
Maximum Junction Temperature	T_J	125	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ\text{C}$
Lead Temperature(Soldering 10 Sec.)	T_L	230	$^\circ\text{C}$

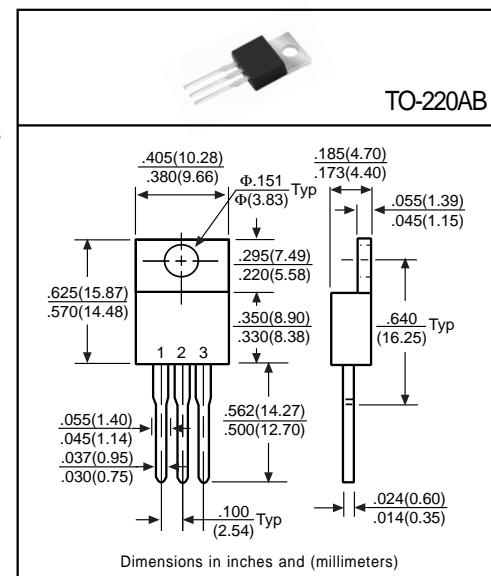

Electrical Characteristics

($V_{in}=10\text{V}$, $I_{out}=500\text{mA}$, $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$, unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Output Voltage	DE7805A	4.85	5.00	5.15	V	$T_J=25^\circ\text{C}$
	DE7805	4.80	5.00	5.20		
	DE7805A	4.85	5.00	5.15		$P_D \leq 15\text{W}$, $5\text{mA} \leq I_O \leq 1\text{A}$
	DE7805	4.75	5.00	5.25		
Line Regulation	DE7805A	-	4.0	50	mV	$T_J=25^\circ\text{C}$, $7\text{V} \leq V_{in} \leq 25\text{V}$
	DE7805	-	4.0	100		
	DE7805A	-	1.6	25		$T_J=25^\circ\text{C}$, $8\text{V} \leq V_{in} \leq 25\text{V}$
	DE7805	-	1.6	50		
Load Regulation	Regload	-	-	100	mV	$T_J=25^\circ\text{C}$, $5\text{mA} \leq I_O \leq 1.5\text{A}$
		-	-	50		$T_J=25^\circ\text{C}$, $250\text{mA} \leq I_O \leq 750\text{mA}$
Input Bias Current	I_{IB}	-	5.5	8.0	mA	$T_J=25^\circ\text{C}$, $I_O \leq 1\text{A}$
Input Bias Current Change	ΔI_{IB}	-	-	0.5	mA	$5\text{mA} \leq I_O \leq 1\text{A}$
		-	-	1.3		$7\text{V} \leq V_{in} \leq 25\text{V}$
Output Noise Voltage	DE7805A	-	40	200	μV	$T_A=25^\circ\text{C}$, $10\text{Hz} \leq f \leq 100\text{KHz}$
	DE7805	-	100	300		
Ripple Rejection	DE7805A	-	68	-	dB	$8\text{V} \leq V_{in} \leq 18\text{V}$, $f=120\text{Hz}$
	DE7805	62	73	-		
Dropout Voltage	DE7805A	-	2.0	-	V	$T_J=25^\circ\text{C}$, $I_O=1\text{A}$
	DE7805	-	2.5	-		
Short Circuit Current	I_{SC}	-	1.5	-	A	$T_J=25^\circ\text{C}$
Peak Output Current	I_{max}	1.7	-	-	A	$T_J=25^\circ\text{C}$
Average T_c of V_{out}	$\Delta V_o / \Delta T$	-	-0.8	-	$\text{mV} / ^\circ\text{C}$	$0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$, $I_O=5\text{mA}$