



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

1.3A FAST RECOVERY PLASTIC RECTIFIER


BYD33DP THRU BYD33MP

FEATURES

- FAST RECOVERY TIMES
- UL 94V0 FLAME RETARDANT EPOXY MOLDING COMPOUND
- DIFFUSED JUNCTION
- LOW COST
- HIGH SURGE CURRENT CAPABILITY

MECHANICAL DATA

- CASE: TRANSFER MOLDED, DO41, DIMENSIONS IN INCHES AND (MILLIMETERS)
- LEADS: SOLDERABLE PER MIL-STD-202, METHOD 208
- POLARITY: CATHODE INDICATED BY COLOR BAND
- WEIGHT: 0.34 GRAMS

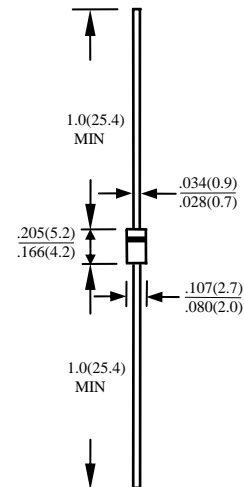

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	BYD33DP	BYD33GP	BYD33JP	BYD33KP	BYD33MP	UNITS	
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	200	400	600	800	1000	V	
MAXIMUM RMS VOLTAGE	V_{RMS}	140	280	420	560	700	V	
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	200	400	600	800	1000	V	
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375" (9.5mm) LEAD LENGTH AT $T_A=55^\circ\text{C}$	I_o	1.3						A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	35						A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_j	12						PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta ja}$	50						$^\circ\text{C/W}$
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 150						$^\circ\text{C}$
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 150						$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS ($T_T T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	BYD33DP	BYD33GP	BYD33JP	BYD33KP	BYD33MP	UNITS	
MAXIMUM FORWARD VOLTAGE AT I_o DC	V_F	1.3						V
MAXIMUM REVERSE CURRENT AT 25°C	I_R	5						μA
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50						μA
MAXIMUM REVERSE RECOVERY TIME (NOTE 3)	T_{RR}	150		250		300	nS	

- NOTE: 1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS
 2. BOTH LEADS ATTACHED TO HEAT SINK 20x20x1t(mm) COPPER PLATE AT LEAD LENGTH 5mm
 3. REVERSE RECOVERY TEST CONDITIONS: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{RR}=0.25\text{A}$

RATINGS AND CHARACTERISTIC CURVE BYD33DP THRU BYD33MP

FIG. 1-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

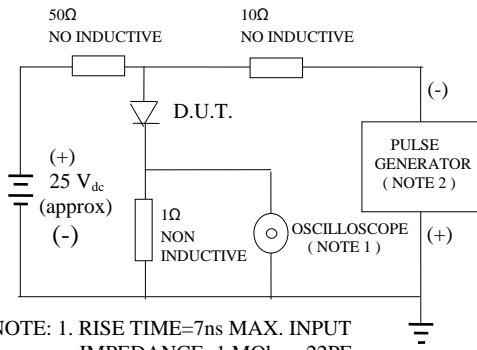

NOTE: 1. RISE TIME=7ns MAX. INPUT IMPEDANCE=1 MOhms 22PF
 2. RISE TIME =10ns MAX. SOURCE IMPEDANCE=50OHMS

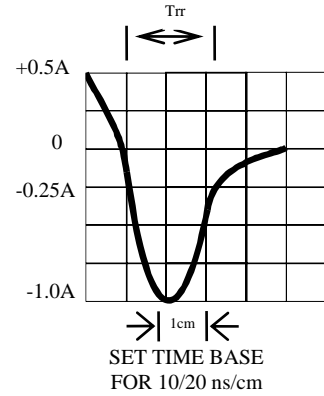


Fig. 2-MAXIMUM CURRENT DERATING CURVE

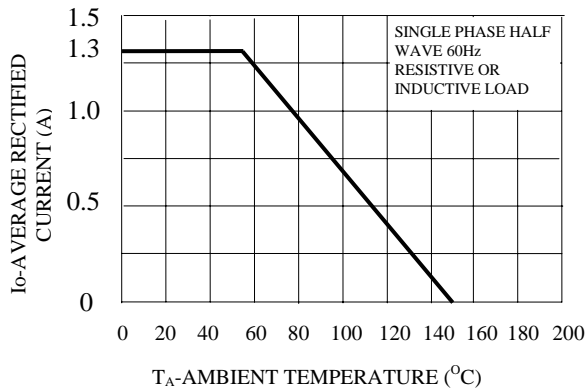


Fig. 3-MAXIMUM FORWARD SURGE NUMBER OF CYCLES

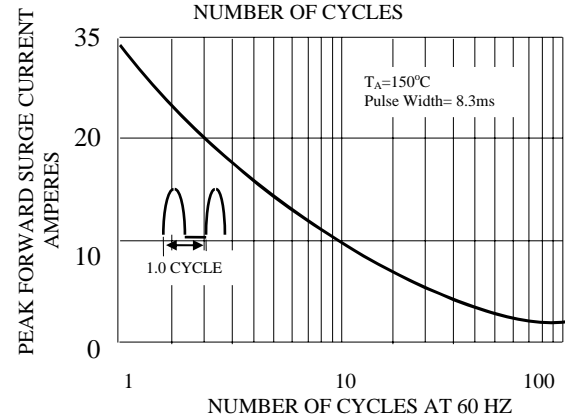


FIG. 4-TYPICAL JUNCTION CAPACITANCE

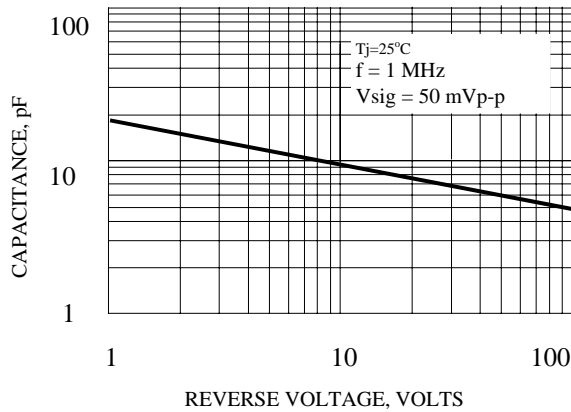


FIG. 5-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

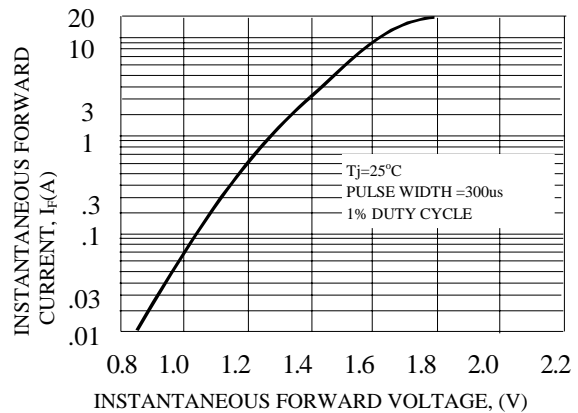


FIG. 6-TYPICAL REVERSE CHARACTERISTICS

