




## Glass Passivated Three Phase Rectifier Bridge

**VRRM** 800 to 1800V  
**ID** 100 Amp

### Applications

- Three phase rectifiers for power supplies
- Rectifiers for DC motor field supplies
- Battery charger rectifiers
- Input rectifiers for variable frequency drives

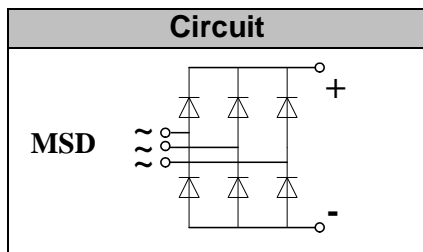

### Features

- Three phase bridge rectifier
- Blocking voltage: 800 to 1800V
- Heat transfer through aluminum oxide DCB ceramic isolated metal baseplate
- Glass passivated chip

### Module Type

TYPE	VRRM	VRSM
MSD100 – 08	800V	900V
MSD100 – 12	1200V	1300V
MSD100 – 16	1600V	1700V
MSD100 – 18	1800V	1900V

### Maximum Ratings

Symbol	Conditions	Values	Units
ID	T <sub>c</sub> =100°C	100	A
IFSM	t=10mS T <sub>vj</sub> =45°C	920	A
i <sup>2</sup> t	t=10mS T <sub>vj</sub> =45°C	4200	A <sup>2</sup> s
Visol	a.c.50Hz;r.m.s.;1min	3000	V
T <sub>vj</sub>		-40 to 150	°C
T <sub>stg</sub>		-40 to 125	°C
M <sub>t</sub>	To terminals(M6)	5±15%	Nm
M <sub>s</sub>	To heatsink(M6)	5±15%	Nm
Weight	Module	230	g


### Thermal Characteristics

Symbol	Conditions	Values	Units
R <sub>th(j-c)</sub>	Per diode	0.9	°C/W
R <sub>th(c-s)</sub>	Module	0.03	°C/W


### Electrical Characteristics

Symbol	Conditions	Values	Units
VFM	T=25°C IFM =300A	1.9	V
IRD	T <sub>vj</sub> =25°C VRD=VRRM	≤ 0.3	mA
	T <sub>vj</sub> =150°C VRD=VRRM	≤ 5	mA


**Performance Curves**

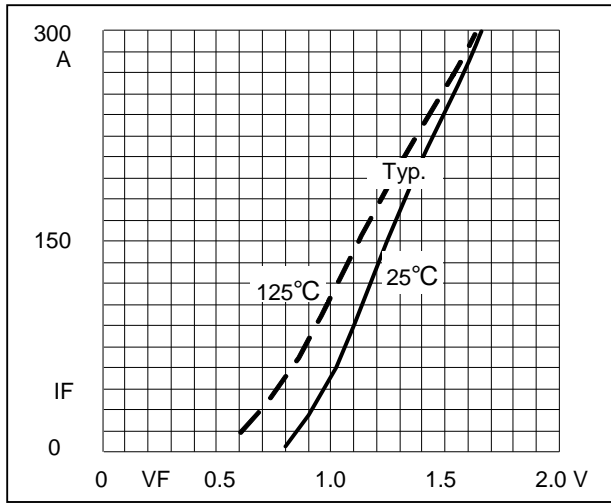


**Fig1. Forward Characteristics**

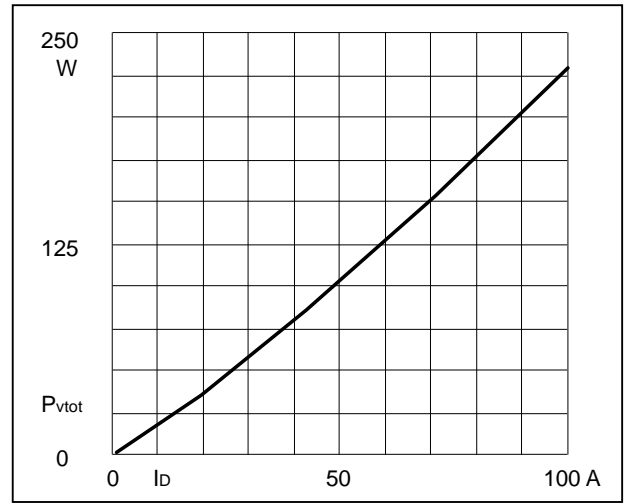


**Fig2. Power dissipation**

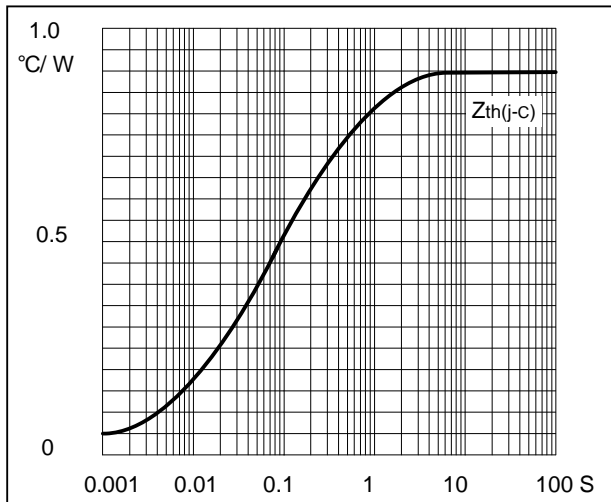

**Fig3. Transient thermal impedance**

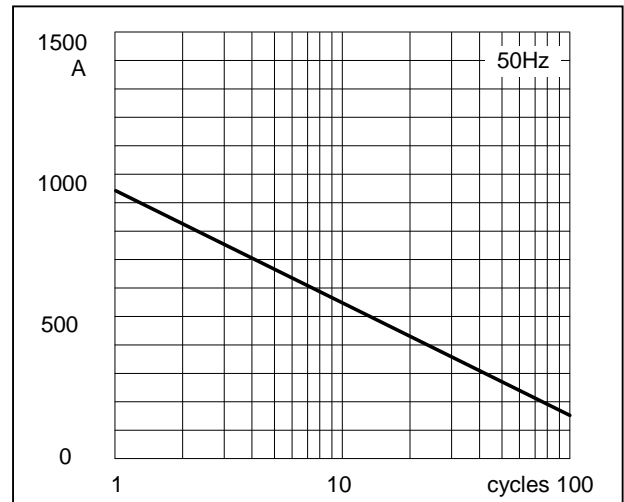

**Fig4. Max Non-Repetitive Forward Surge Current**

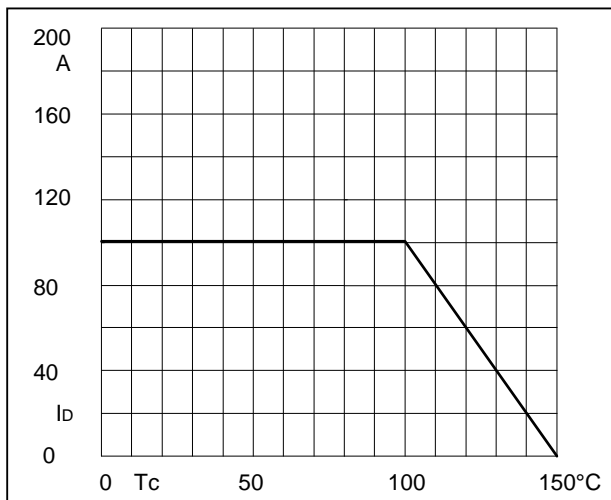

**Fig5. Forward Current Derating Curve**

## Package Outline Information

