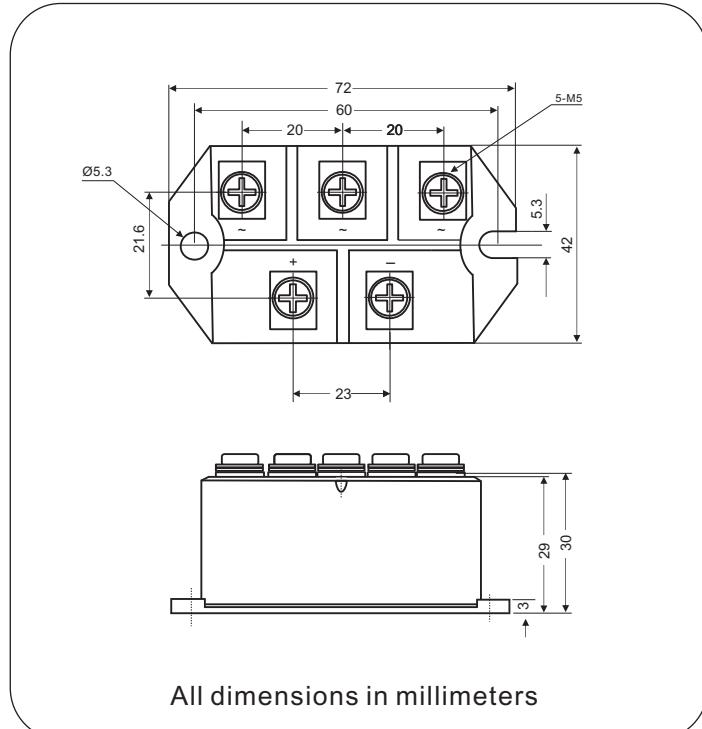


Three-Phase Bridge Rectifier, 50A

MTP5008D Thru MTP5018D
(MTP50-08 Thru MTP50-18)



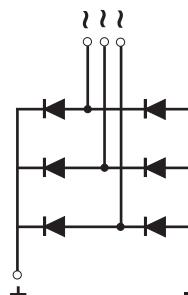
FEATURES

- UL recognition file number E320098
- Typical IR less than 2.0 μ A
- High surge current capability
- Low thermal resistance
- Compliant to RoHS
- Isolation voltage up to 2500V



TYPICAL APPLICATIONS

General purpose use in AC/DC bridge full wave rectification for big power supply, field supply for DC motor, industrial automation applications.



ADVANTAGE

- International standard package
- Epoxy meets UL 94 V-O flammability rating
- Small volume, light weight
- Small thermal resistance
- **Weight:** 170g (6 ozs)

PRIMARY CHARACTERISTICS

$I_{F(AV)}$	50A
V_{RRM}	800V to 1800V
I_{FSM}	750A
I_R	20 μ A
V_F	1.2V
$T_{J\max.}$	150°C

Nell High Power Products
MAJOR RATINGS AND CHARACTERISTICS (T_A = 25°C unless otherwise noted)

PARAMETER	SYMBOL	MTP50..D					UNIT
		08	10	12	16	18	
Maximum repetitive peak reverse voltage	V _{RRM}	800	1000	1200	1600	1800	V
Peak reverse non-repetitive voltage	V _{RSM}	900	1100	1300	1700	1900	V
Maximum DC blocking voltage	V _{DC}	800	1000	1200	1600	1800	V
Maximum average forward rectified output current	I _{F(AV)}			50			A
Peak forward surge current single sine-wave superimposed on rated load	I _{FSM}			750			A
Rating (non-repetitive, for t greater than 1 ms and less than 8.3 ms) for fusing	I ² t			2800			A ² s
RMS isolation voltage from case to leads	V _{ISO}			2500			V
Operating junction storage temperature range	T _J			-40 to 150			°C
Storage temperature range	T _{STG}			-40 to 125			°C

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	MTP50..D					UNIT
			08	10	12	16	18	
Maximum instantaneous forward drop per diode	I _F = 50A	V _F			1.2			V
Maximum reverse DC current at rated DC blocking voltage per diod	T _A = 25°C	I _R			20			μA
	T _A = 150°C				4000			

THERMAL AND MECHANICAC (T_A = 25°C unless otherwise noted)


PARAMETER	TEST CONDITIONS	SYMBOL	MTP50..D					UNIT
			08	10	12	16	18	
Typical thermal resistance junction to case	Single-side heat dissipation, sine half wave	R _{θJC} ⁽¹⁾			0.3			°C/W
Mounting torque to heatsink M5 to terminal M5 ± 10 %	A mounting compound is recommended and the torque should be rechecked after a period of 3 hours to allow for the spread of the compound.				4			Nm
					4			
Approximate weight					170			g

Notes

(1) With heatsink, single side heat dissipation, half sine wave.






(2) M5 screw.

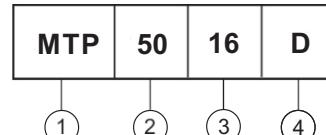Device code



(MTP5016D=MTP50-16)

- [1] - Module type: "MTP" for 3Ø Bridge
- [2] - I_{F(AV)} rating:"50" for 50A
- [3] - Voltage code:code x 100 = V_{RRM}
- [4] - Package Outline: D type package

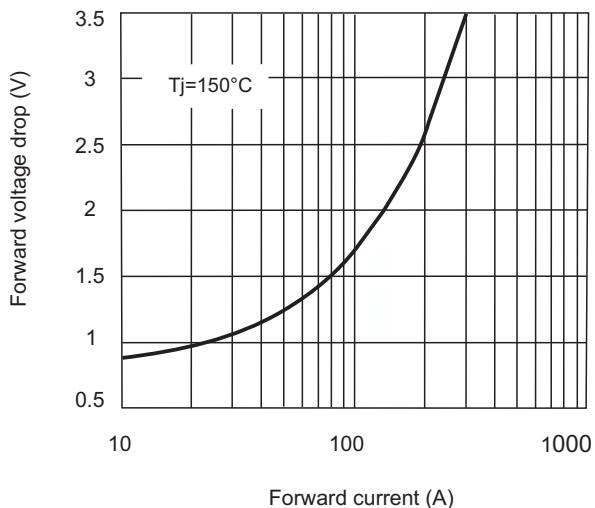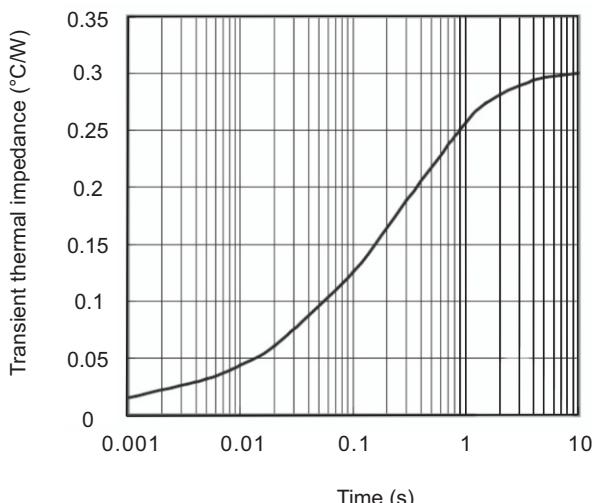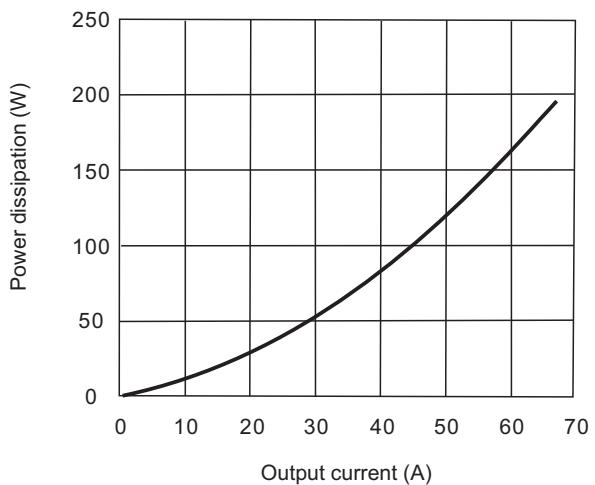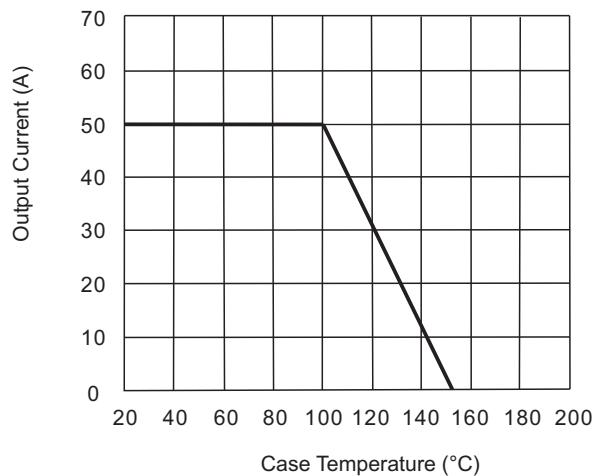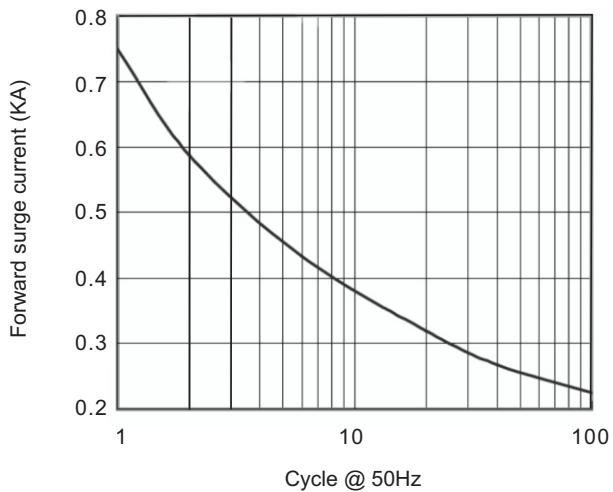Fig.1 Forward characteristic

Fig.2 Thermal Impedance (junction to case)

Fig.3 Power dissipation vs. output current

Fig.4 Case temperature vs output current

Fig.5 Forward surge current vs. cycle

Fig.6 I^2t characteristic
