



● 超小型・超薄型の白色LEDです。

● Ultra-compact and ultra-thin white LED

● 絶対最大定格/Absolute Maximum Rating^{※1}

(Ta 25°C)

| Product code | Pd (mW) | IF (mA) | IFP ^{※2} (mA) | VR (V) | Top (°C) | Tst (°C) |
|--------------|------------|------------|---------------------------|-----------|-------------|-------------|
| CL-282S-WZ | 33 | 10 | 50 | 5 | -25~+80 | -30~+85 |

※1 1素子当たりの値です。/The values are based on 1-die performance.

※2 IFPの条件はduty1/10、パルス巾30msecです。/Condition for IFP is pulse of 1/10 duty and 30msec width.

● 電気的光学的特性/Electro-optical Characteristics

(Ta 25°C)

| Parameter | Symbol | Conditions | MIN | TYP | MAX | Unit |
|---|--------|------------|--|--|------|------|
| 順電圧/Forward Voltage ^{※1} | VF | IF=5mA | — | 2.9 | 3.15 | V |
| 逆電流/Reverse Current ^{※1} | IR | VR=5V | — | — | 2 | μA |
| 光度/Luminous Intensity ^{※2} | Iv | IF=5mA | — | 250 | — | mcd |
| 色度座標/ Chromaticity coordinates ^{※3} | x, y | IF=5mA | x(±0.02) a 0.28 b 0.28 c 0.34 d 0.34 | y(±0.02) 0.236 0.301 0.386 0.353 | | |


※1 1素子当たりの値です。/The values are based on 1-die performance.

※2 NIST規格に準拠、各素子同時点灯の値です。

Compliant with NIST. The values are based on the condition that each die lights simultaneously.

※3 色度座標は、a、b、c、dに囲まれた範囲です。/Chromaticity coordinates is surrounded with a,b,c,d.


● 外形寸法図/Outline drawing

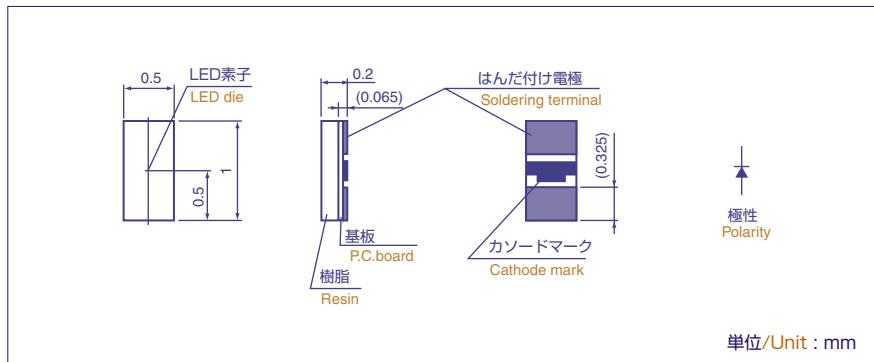

推奨はんだ付けパターン

The following soldering patterns are recommended for reflow-soldering:

リフローはんだ用
For reflow soldering

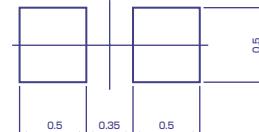

■ 諸特性/Characteristics

