

Coaxial

Low Pass Filter

DC to 225 MHz (40 dB Isolation up to 20 GHz)

NEW!
VLFX-225

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 10W max. at 25°C

*Passband rating, derate linearly to 3.5W at 100°C ambient.

Features


- very good isolation, 40 dB up to 20 GHz
- 21 sections
- temperature stable LTCC internal structure
- patent pending
- re-entry frequency > 20 GHz
- rugged stainless steel unibody


CASE STYLE: FF1118
PRICE: \$ 39.95 ea. QTY (1-9)

Applications

- harmonic rejection
- transmitters/receivers
- lab use
- test instrumentation


Outline Drawing

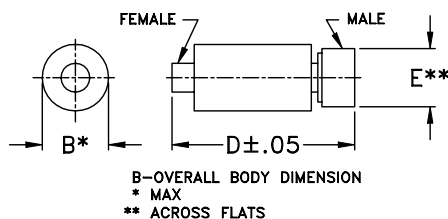


Outline Dimensions (inch/mm)

B	D	E	wt.
.39	2.67	.312	grams
9.91	67.82	7.92	17.0

Functional Schematic



Typical Frequency Response


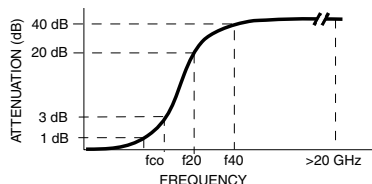


Low Pass Filter Electrical Specifications @ 25°C

MODEL NO.	PASSBAND (MHz) (Loss < 1.2dB) Max.	fco, MHz Nom (Loss 3 dB) Typ	STOPBAND (MHz) (Loss, dB)		VSWR (:1)		NO. OF SECTIONS
			f20 Min.	f40 Typ.	Stopband Typ.	Passband Typ.	
VLFX-225	DC-225	345	460	520-20000	10	1.15	21

Typical Performance Data @ 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.18	1.08
100	0.52	1.10
160	0.61	1.11
225	0.92	1.10
260	1.16	1.13
300	1.52	1.28
360	3.50	1.62
400	6.96	1.78
440	23.09	3.47
520	41.12	8.40
600	41.60	11.87
750	49.81	18.37
1000	49.72	33.93
2500	78.92	98.08
5000	68.41	49.08
7500	65.61	36.38
10000	59.00	17.35
12500	74.50	12.80
15000	57.27	5.82
20000	58.14	4.44

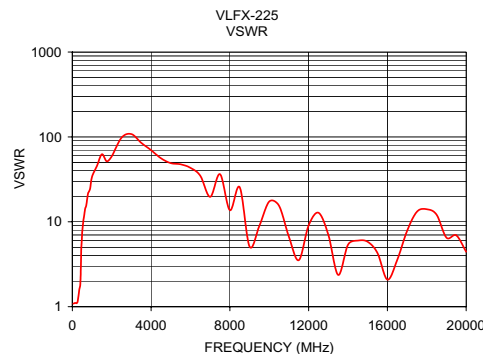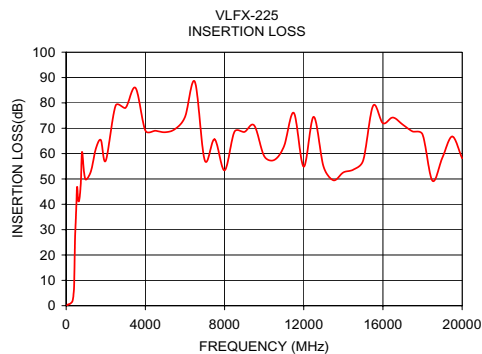

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. OR
M96318
VLFX-225
EDU-0399
ED-11930A/3
URJ/AD/CP
050119