
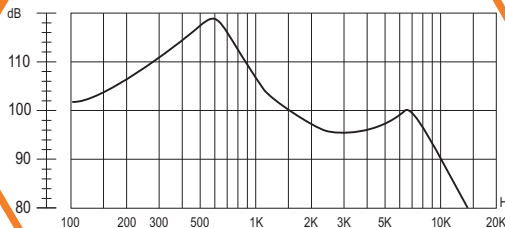
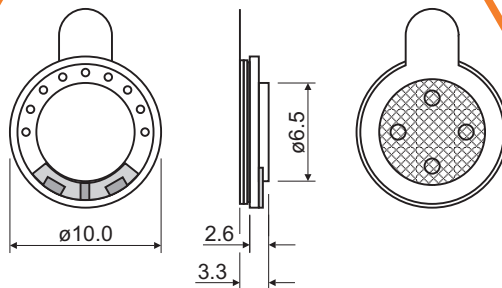


# SoniCrest SPEAKER SOUND GENERATORS

## HSR10D



### Dimension

Unit : mm  
Tolerance :  $\pm 0.3$ mm

### Frequency Response

Applied Voltage : 100mV, Sine Wave  
Based on IEC-R318 Standard

- **Specification** (all data taken at 25°C unless otherwise specified)

Coil Impedance ( $\Omega$ )	Rated Power (mW)	Maximum Input Power (mW)	★Sensitivity at 1kHz (dB)	★Frequency Range (Hz)	Total Harmonic Distortion (THD)	Operating Temperature (°C)	Storage Temperature (°C)
32 $\pm$ 20%	10	30	106 $\pm$ 3	300 ~ 4000	< 5%	-10 ~ +40	-30 ~ +65

**HSR10D-32**

The specification are only for 32 $\Omega$  version. Specification for other impedance is available upon request.  
★Value Applied 100mV Input Power and Based on IEC-R318 Standard.