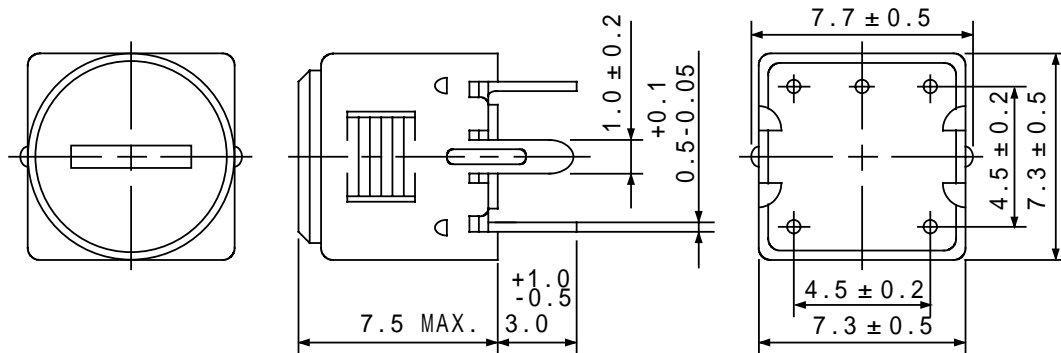


**Type: M-7GUB**
**Product Description**


- 8.2 × 7.8mm Max.(L × W), 7.5mm Max. Height.
- Inductance:14mH Max.
- Operating frequency:1.0MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements


**Feature**

- High inductance variable shielded type.
- RoHS Compliance

**Dimensions (mm)**


- \* Dimension does not include solder used on coil.
- \* Pin pitch shall be measured at the root of terminal.

**Connection (Bottom View)**


"S" is winding start

**Specification (Part No. 4337-T003)**

Item	(1-3)	Measuring Conditions
Inductance	5.5 mH $\pm$ 6% Variable	252kHz
Unloaded Q	40 Min.	252kHz