


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Specifications	01-24-08	DP
D	Graphics Update	03-14-08	DP


MECHANICAL DIMENSIONS:

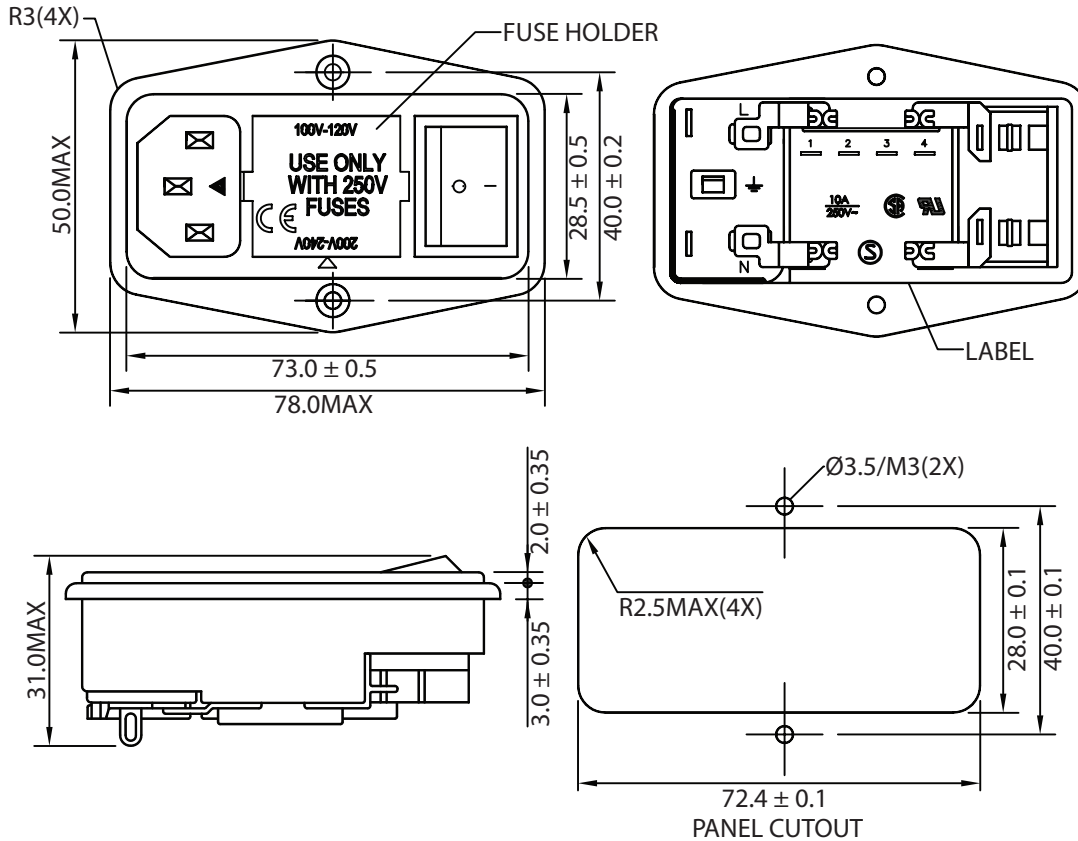

ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE RATING.....250VAC
- 1-2. CURRENT RATING
 - A. @ 250 VAC (UL,CSA, SEMKO).....10 A RMS MAX
- 1-3. HIPOT RATING (FOR ONE MINUTE)
 - A. LINE TO GROUND 2000V AC
 - B. LINE TO LINE2000V AC
- 1-4. MINIMUM INSULATION RESISTANCE: @ 500V DC
 - A. LINE & NEUTRAL TO GROUND 100M OHM
 - B. LINE TO NEUTRAL 100M OHM
- 1-5. AMBIENT TEMPERAUTRE 25° C
- 1-6. OPERATING TEMPERATURE..... -25° C TO +85° C
- 1-7. DOUBLE 5X20mm FUSEHOLDER, PLASTIC CASE
- 1-8. SOLDER TAB TERMINALS
- 1-9. FLAMMABILITY CLASS UL94V-0
- 1-10. APPROVALS: UL, CSA, SEMKO
- 1-11. RoHS COMPLIANT

ELECTRICAL SCHEMATIC:

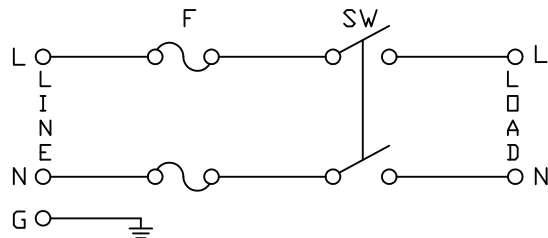

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)	Qualtek Electronics Corp. PPC DIVISION		
		Part Number: 764-00/002	RoHS Compliant	
0-1	0.15	Description: MULTI-FUNCTION MODULE		
1-6	0.20			
6-18	0.30	UNIT: in	REV. D	
18-50	0.50			
50-120	0.70	Drawn / Date	Checked / Date	Approved / Date
120-250	0.90	B.Zhang 09-24-03	09-24-03	JJH / 09-24-03
250-500	1.20			