


LED Displays ~ Seven Segment ~ Numeric



Triple Digit

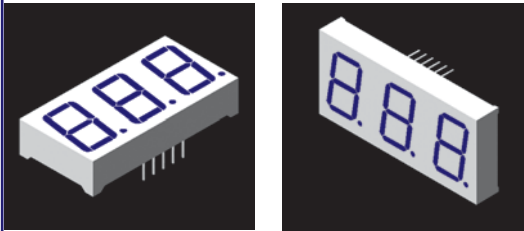


Features/Options

- ▶ Standard and high brightness chips
- ▶ Intensity grading available
- ▶ Custom sizes at minimal tooling
- ▶ Face and segment off colors in grey and milky white

Applications/Uses


- ▶ Panel meter displays
- ▶ Time lapsed panels
- ▶ Diagnostic equipment
- ▶ Counter displays

0.56" triple digit

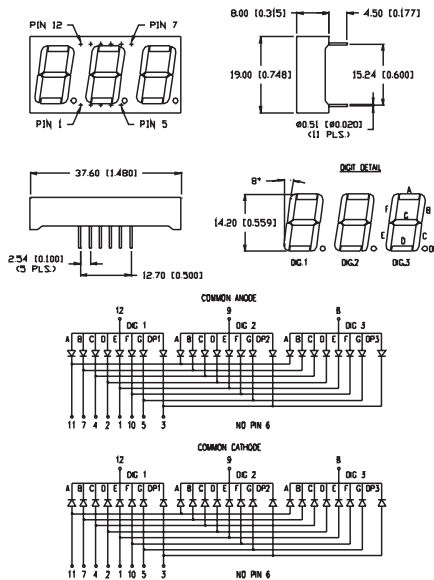

Part Number	Wave Length (nm)	Brightness (μcd @ 10mA)	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (common)
LDT-M512RI	565	2500	2.2	2.6	Green	Anode
LDT-M514RI	635	2500	2.0	2.5	Red	Anode
LDT-M516RI	660	8000	1.7	2.2	Red	Anode
LDT-M512RI-SUG	574	7000	2.2	2.6	Green	Anode
LDT-M514RI-SI	636	15,000	2.0	2.6	Red	Anode
LDT-M517RI-USB	470	6000	3.5	4.0	Blue	Anode
LDT-N512RI	565	2500	2.2	2.6	Green	Cathode
LDT-N514RI	635	2500	2.0	2.5	Red	Cathode
LDT-N516RI	660	8000	1.7	2.2	Red	Cathode
LDT-N512RI-SUG	574	7000	2.2	2.6	Green	Cathode
LDT-N514RI-SI	636	15,000	2.0	2.6	Red	Cathode
LDT-N517RI-USB	470	6000	3.5	4.0	Blue	Cathode

0.80" triple digit

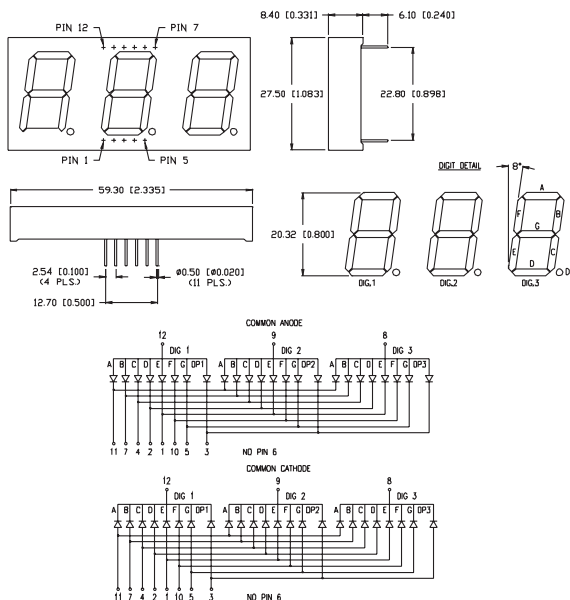

Part Number	Wave Length (nm)	Brightness (μcd @ 10mA)	Vf (typ) 10mA	Vf (max) 10mA	Emitted Color	Polarity (common)
LDT-M8002RI	565	2500	2.2	2.6	Green	Anode
LDT-M8004RI	635	2500	2.0	2.5	Red	Anode
LDT-M8006RI	660	8000	1.7	2.2	Red	Anode
LDT-M8002RI-SUG	574	7000	2.2	2.6	Green	Anode
LDT-M8004RI-SI	636	15,000	2.0	2.6	Red	Anode
LDT-M8007RI-USB	470	6000	3.5	4.0	Blue	Anode
LDT-N8002RI	565	2500	2.2	2.6	Green	Cathode
LDT-N8004RI	635	2500	2.0	2.5	Red	Cathode
LDT-N8006RI	660	8000	1.7	2.2	Red	Cathode
LDT-N8002RI-SUG	574	7000	2.2	2.6	Green	Cathode
LDT-N8004RI-SI	636	15,000	2.0	2.6	Red	Cathode
LDT-N8007RI-USB	470	6000	3.5	4.0	Blue	Cathode



USA/Canada +1-800-278-5666
 Europe +49-6081-964380
 Asia +886-3-5821124



www.lumex.com



USA/Canada +1-847-359-8904
 Europe +49-6081-964381
 Asia +886-3-5821154