


S15VB60

600V 15A

OUTLINE DIMENSIONS

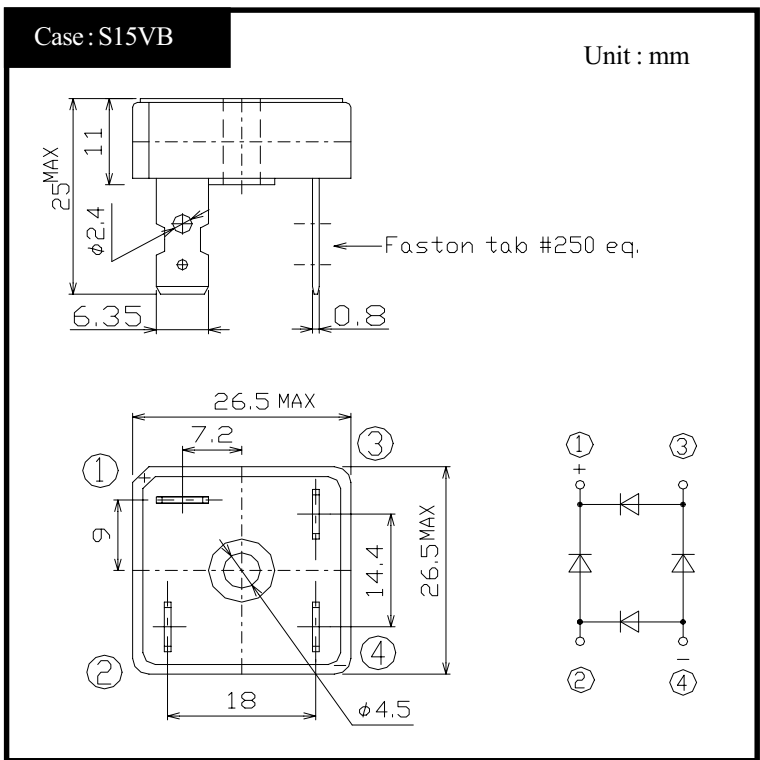

RATINGS

Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-40~150	°C
Operating Junction Temperature	T_j		150	°C
Maximum Reverse Voltage	V_{RM}		600	V
Average Rectified Forward Current	I_O	50Hz sine wave, R-load With heatsink, $T_c=83^{\circ}C$	15	A
		50Hz sine wave, R-load Without heatsink, $T_a=40^{\circ}C$	4.5	
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1cycle peak value, $T_j=25^{\circ}C$	200	A
Current Squared Time	I^2t	$2ms \leq t < 10ms$ $T_j=25^{\circ}C$	200	A^2s
Dielectric Strength	V_{dis}	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 1N·m)	2	N·m

Electrical Characteristics ($T_c=25^{\circ}C$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=7.5A$, Pulse measurement, Rating of per diode	Max.1.05	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max.10	μA
Thermal Resistance	θ_{jc}	junction to case	Max.2.3	°C/W


S15VBx

Forward Voltage

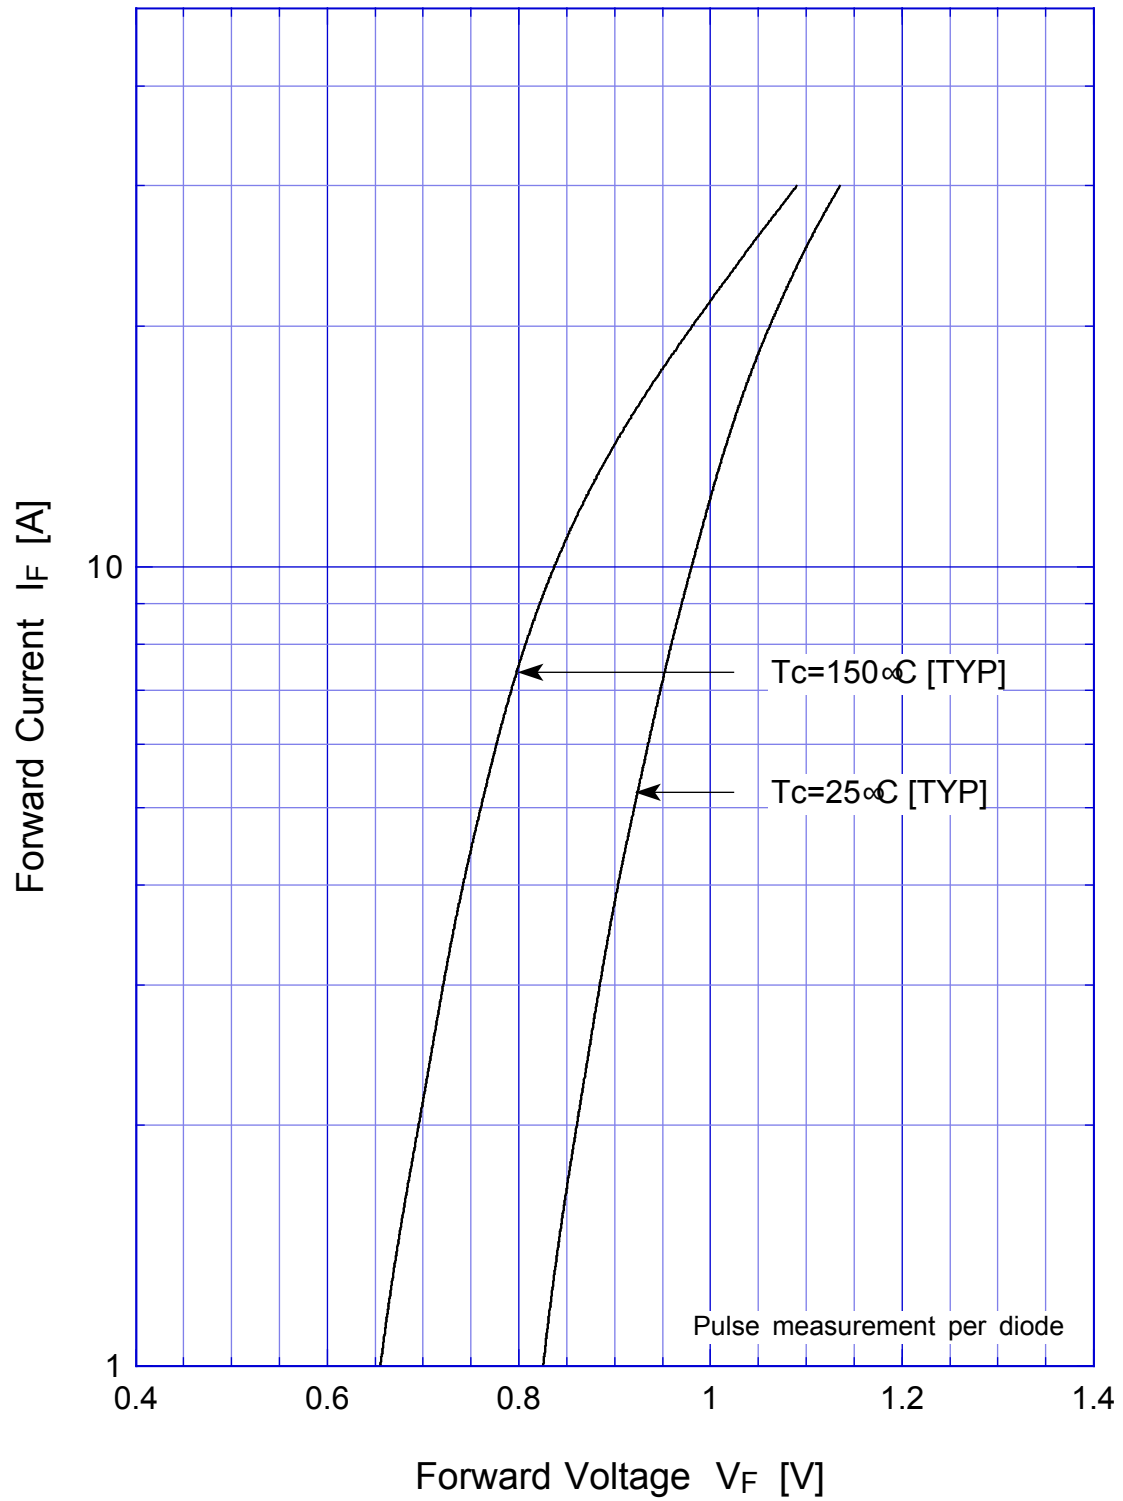

S15VBx

Forward Power Dissipation

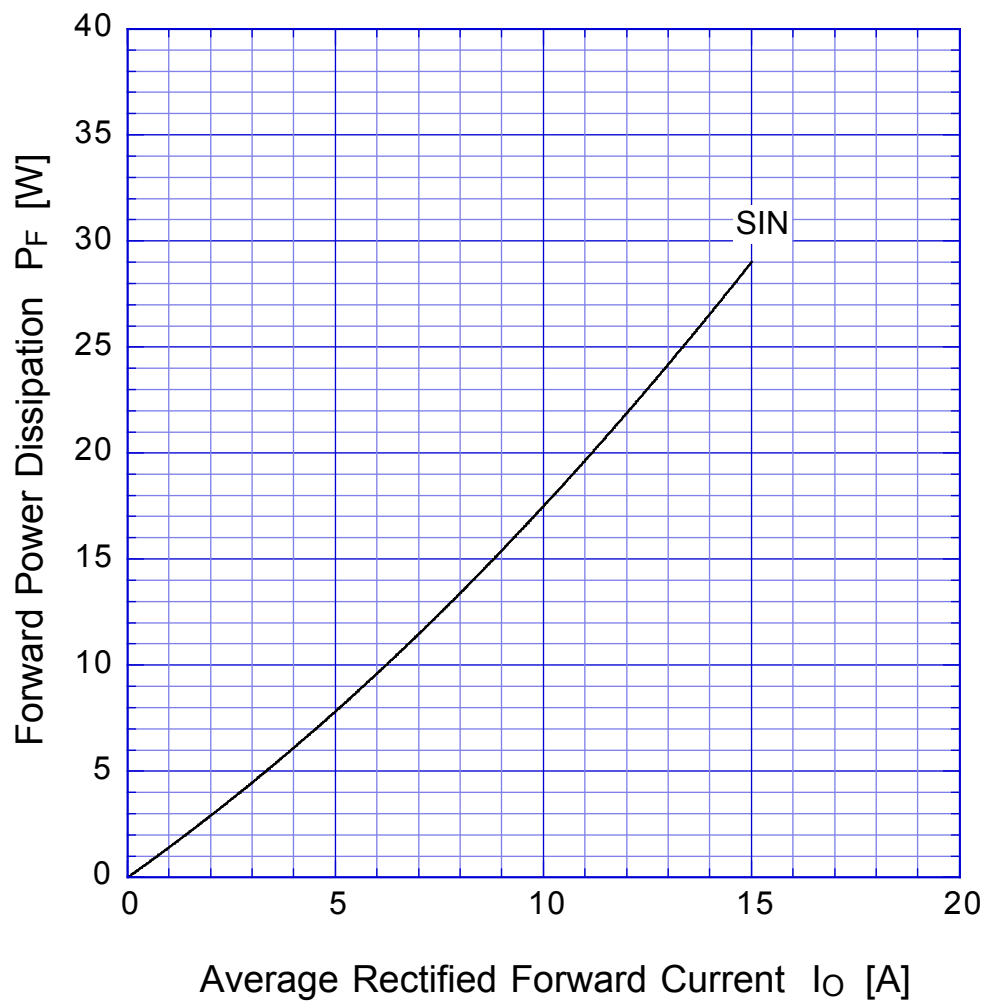


$T_j = 150^{\circ}\text{C}$

Sine wave

S15VBx

Derating Curve

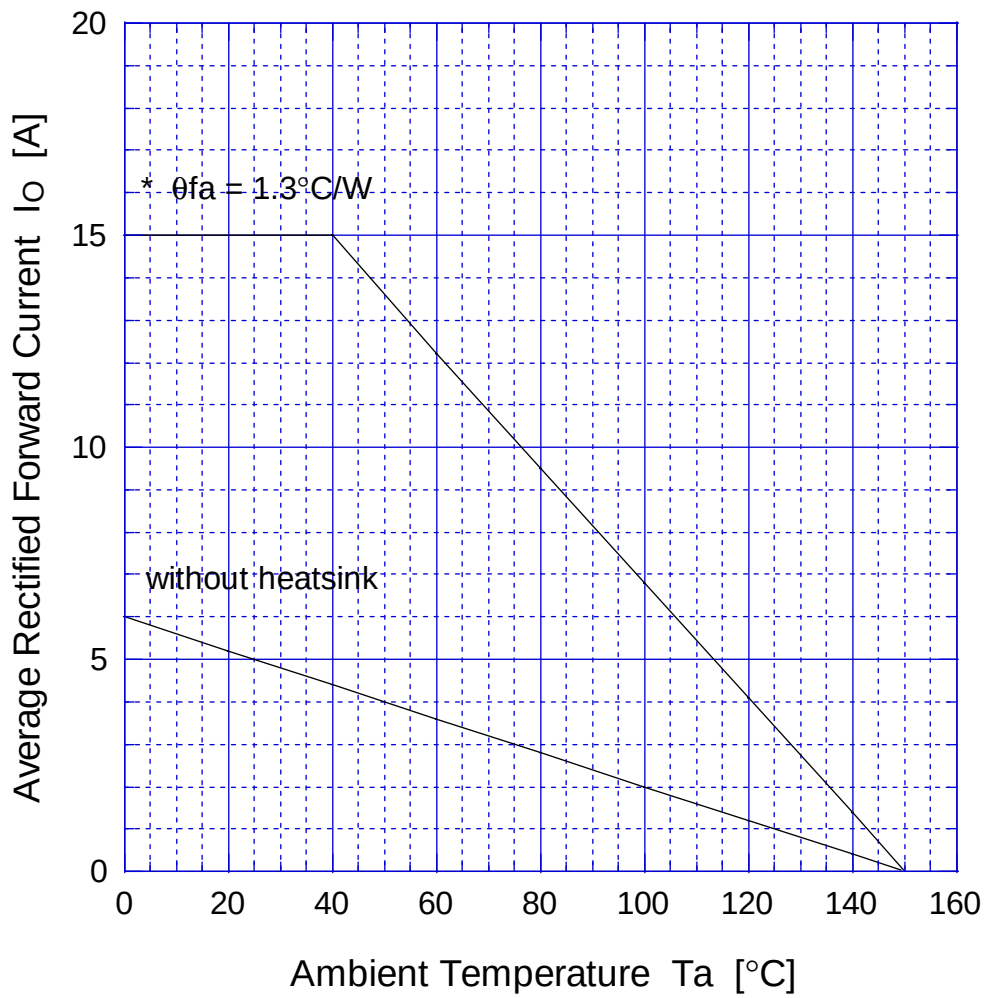

Sine wave

R-load

Free in air

* with thermal compound, TOR=0.5N-m

S15VBx

Peak Surge Forward Capability

