
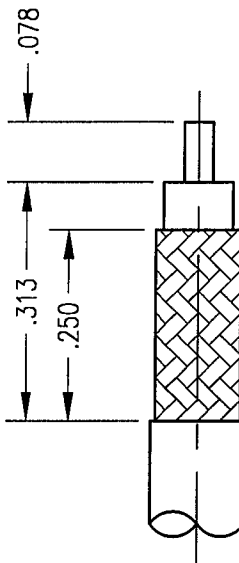
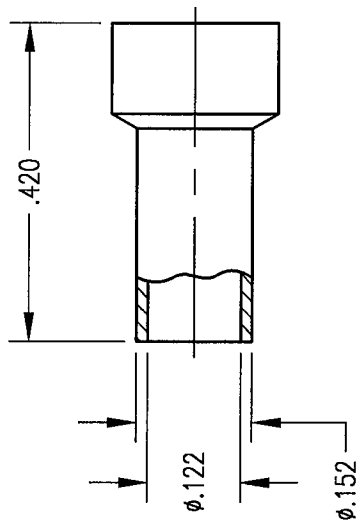


201-910-0630G			
DWG. NO.	REV	DESCRIPTION	DATE
	D	NPR 1705	JED 3/2/00

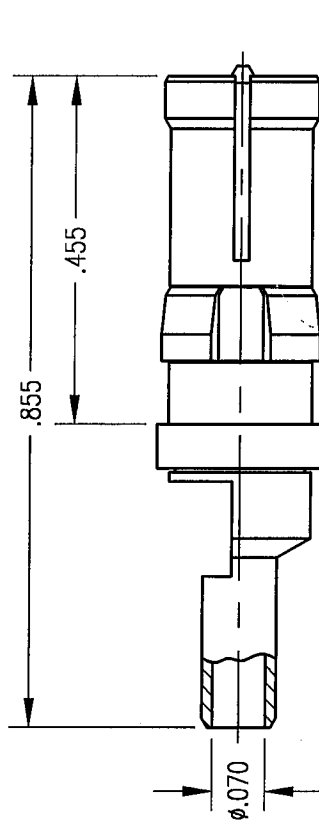

CABLE TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:

- FRONT BODY: BERYLLIUM COPPER PER ASTM B196
- CLIP RING: PHOSPHOR BRONZE PER ASTM B103
- ALL OTHER METAL PARTS: BRASS PER ASTM B16
- INSULATOR: TEFLON PER ASTM D1710

2. FINISH:

- BODY AND CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER .000050 MIN. NICKEL PER QQ-N-290
- FERRULE: .000005 MIN. GOLD PER MIL-G-45204 OVER .000050 MIN. NICKEL PER QQ-N-290
- CLIP RING: .000100 MIN. NICKEL PER QQ-N-290 OVER COPPER FLASH

3. ELECTRICAL:

- IMPEDANCE: 50 OHMS NOMINAL
- FREQUENCY RANGE: 0 - 900 MHz
- DESIGNED FOR USE WITH RG-316 CABLE OR EQUIVALENT.
- FOR CABLING PROCEDURES USE CAP 9-01 WITH TRIMMING DIMENSIONS SHOWN.
- CRIMP FERRULE USING .128 HEX DIE.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)		Litton Winchester/Retconn 400 Park Road Plainfield, Connecticut 06065	
TOLERANCES: DECIMALS .XX ± .01/.0254 FRACTIONS XXX ± .005/.0127 ANGLES ± 2°		SCALE 4:1	
CUSTOMER DRAWING		TITLE RDM STRAIGHT RECEPTACLE	
DRAWN JED	DATE 3/2/00	CHECKED JH	DATE 3-2-00
DESIGNED JED	DATE 3/2/00	APPROVED JED	DATE 3/2/00
A 201-910-0630G		1 1 D	