






MAT'L NO.	ENG NO.
15-24-4784	A-8981-4SM8-LF

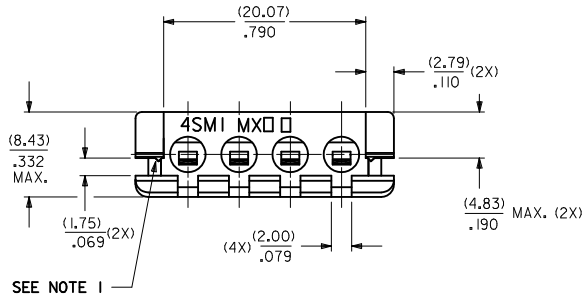

SECTION C - C

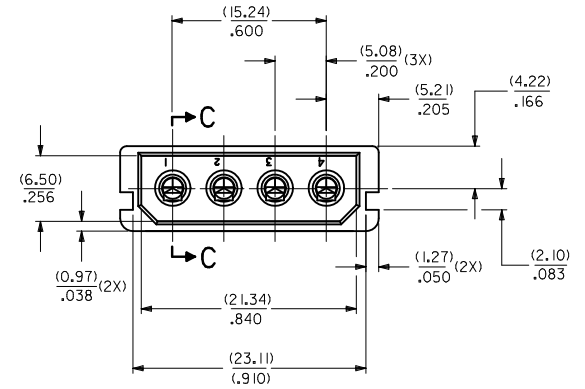

RECOMMENDED P.C. BOARD LAYOUT

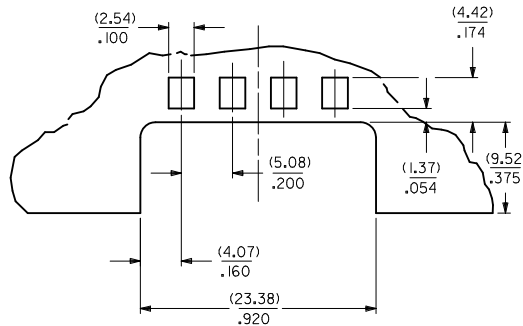

NOTES:

- MOLDED RIBS TO PROVIDE AN INTERFERENCE FIT TO A (1.62± 0.10)/ P.C. BOARD
- PLATING
POSTPLATE (0.00254)/.000100 MIN. TIN OVER
0.00127/(.000050) MIN. NICKEL OVERALL.
- PART INTENDED TO MATE WITH HOUSING 8981-4P2 AND TERMINAL 8980-3*.
- PRODUCT SPEC. PS-8981-4SM* APPLIES.
- MATERIAL:
HOUSING - NYLON 46, GLASS FILLED,
UL 94V-0, COLOR: NATURAL (OFF-WHITE)
TERMINAL - PHOSPHOR BRONZE
- PARTS TO BE PACKED IN MOISTURE BARRIER BAG.

ADD NOTE 6. EC NO: S2012-0445 DRWN:SKANG 2011/12/07 CHKD:ATSEE 2012/01/05 APPR:MLONG 2012/01/10	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± .008</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.20</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± ---</td> <td>± ---</td> </tr> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± .008	2 PLACES	± 0.20	± ---	1 PLACE	± ---	± ---	DIMENSION STYLE MM/IN	SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		mm	INCH																		
	4 PLACES	± ---	± ---																		
	3 PLACES	± ---	± .008																		
2 PLACES	± 0.20	± ---																			
1 PLACE	± ---	± ---																			
C2	DESCRIPTION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY JWAN	DATE 1995/06/29	POWER CONNECTOR, 4 CKTS DUAL SLOTS, SMT																
		CHECKED BY SKTOH	DATE 1995/06/29																		
		APPROVED BY MSIMMEL	DATE 1995/06/30	MATERIAL NO. 15-24-4784	DOCUMENT NO. SD-8981-4SM8	SHEET NO. 1 OF 1															
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			MOLEX INCORPORATED																		