


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

126-35-9

REVISIONS

ISSUE	CHANGES
1	CN 34481 C REDRAWN JCA 05/28/93
2	CN 38226 C BDH 02/27/01

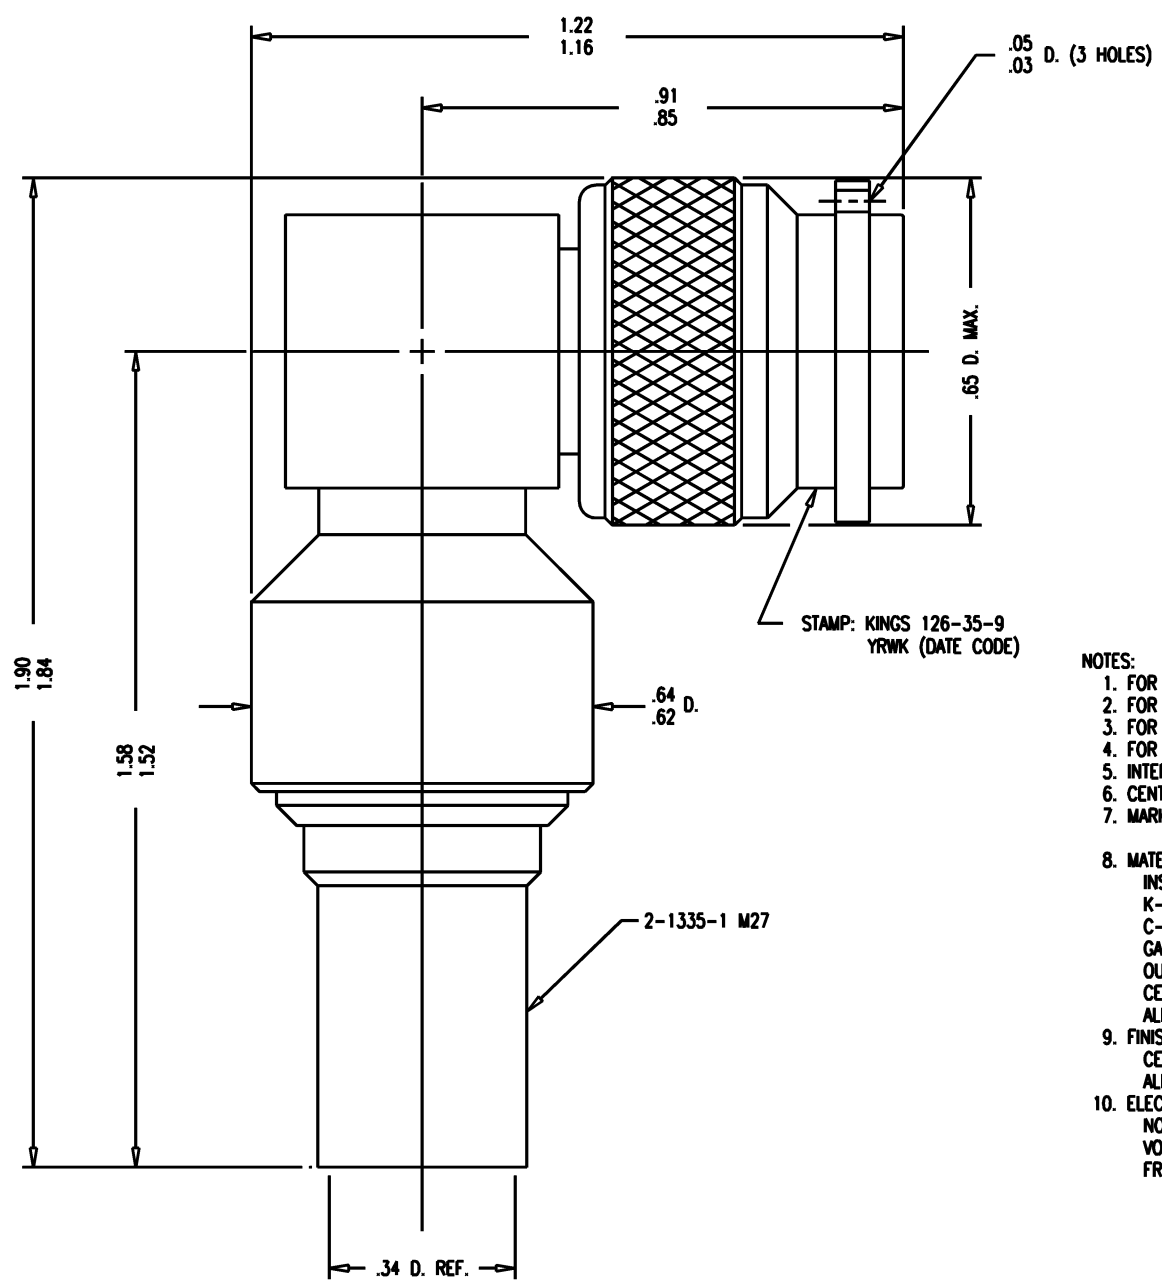

NOTES:

- FOR USE WITH TIMES AA-5887 CABLE.
- FOR CABLING INSTRUCTIONS SEE 3-440-2.
- FOR CABLE TRIMMING USE KTJ-150 & KTD-138.
- FOR CRIMPING USE DIE KTH-1077.
- INTERFACE PER MIL-STD-348, FIG. 313-1.
- CENTER CONTACT (1-5704-2MA9) SUPPLIED UNASSEMBLED.
- MARK PACKAGE: KINGS 126-35-9
XX XX (DATE CODE)
- MATERIALS:**
INSULATORS: TEFLON, ASTM-D-1457
K-GRIP SLEEVE: COM. BRONZE TUBE, ALLOY 220
C-RING: PHOS. BRONZE, QQ-B-750
GASKET: SIL. RUB., ZZ-R-765
OUTER CONTACT } BER. COP., ASTM-B-196
CENTER CONTACT }
ALL OTHER METAL PARTS: BRASS, ASTM-B16
- FINISHES:**
CENTER CONTACTS: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:**
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz

JCA3917

SCALE 4:1

APPROX SURFACE AREA

WAS: E-15911

USED ON

REF:

PLUG, ANGLE, TNC

DRAWN JCA	DATE 05/28/93
-----------	---------------

DESIGN MJB	DATE 07/23/93
------------	---------------

APPR.	DATE
-------	------

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

GSD

126-35-9