

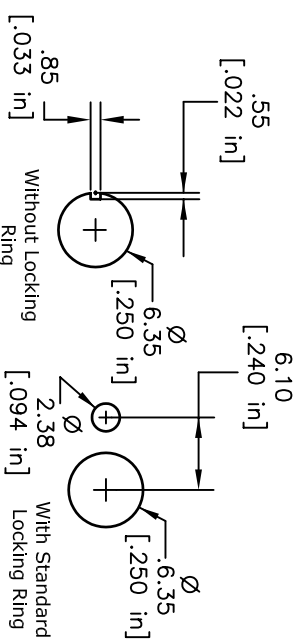


RECOMMENDED P.C.B. LAYOUT

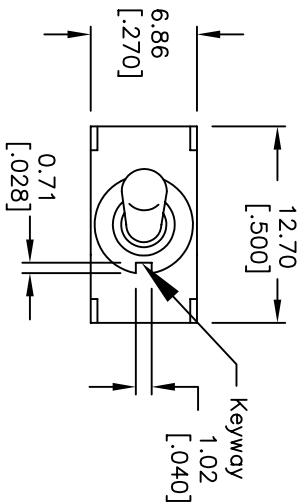

SWITCH FUNCTION

PDS. 1	PDS. 2	PDS. 3
DN	DN	DN
DPEN	DPEN	DPEN




CIRCUIT: SPDT

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC or 28VDC; 2A @250VAC
- FIXED TERMINAL/MOVING CONTACT: Copper Alloy W/Silver Plate.
- ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to +85°C
- 2002/95/EC (ROHS) COMPLIANT.
- HARDWARE TO BE SHIPPED BULK

12. ▲ DENOTES CRITICAL PARAMETER.

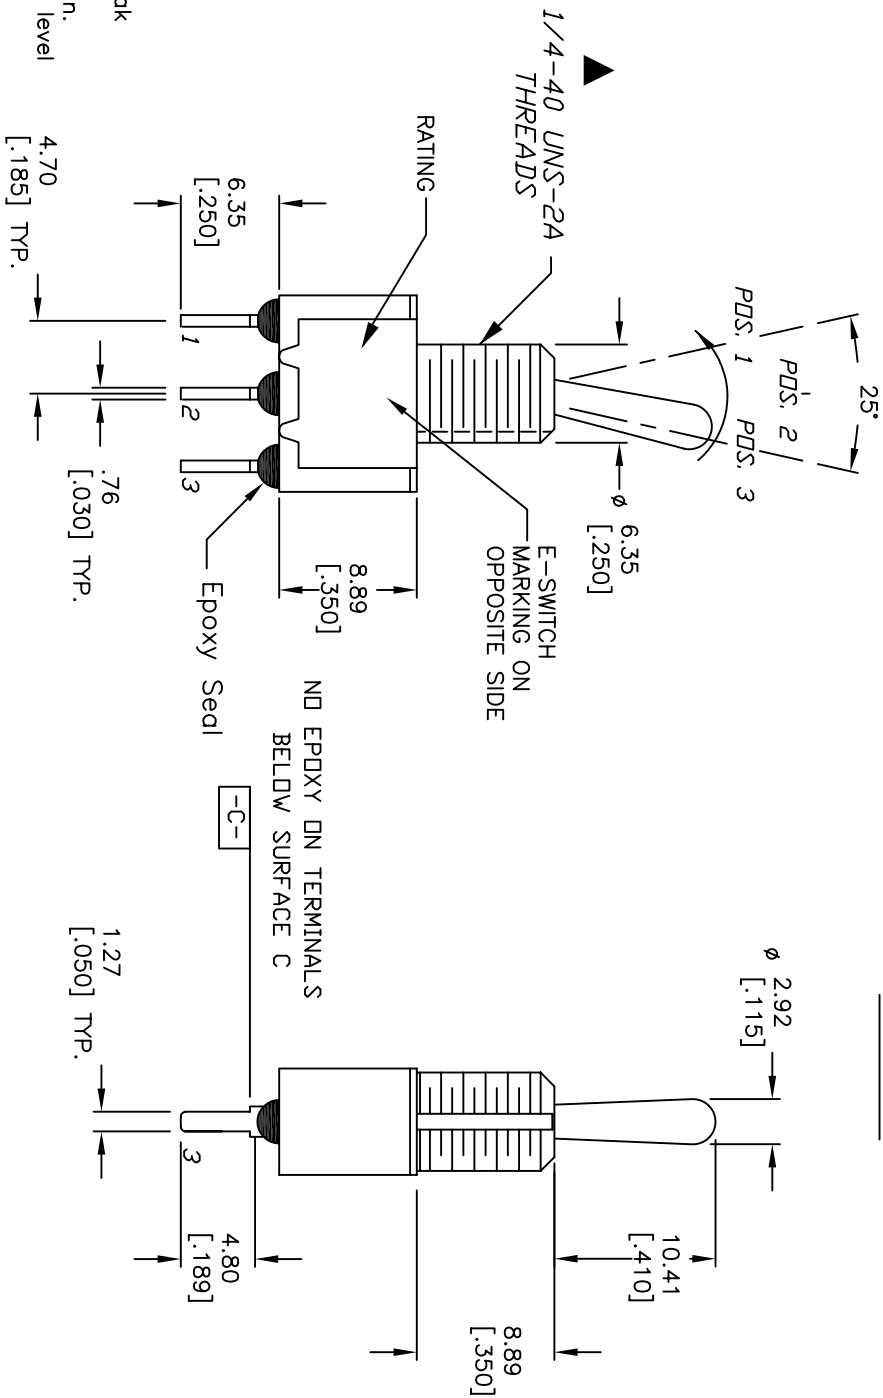

REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
A	18437	RELEASE FOR PRODUCTION	3/13/09	BLR	2:1	3/13/09	BLR	ST115003	A