

5N Type Side-operational Light Touch Switches

Type: **EVQPF**




■ Features

- Wealth of product types: Horizontal type, snap-in terminals, etc.
- Can be automatically dip-soldered: Integral molding of the terminals and main body prevents the escape of flux.

■ Recommended Applications

- Operating switches for other electronic equipment

■ Explanation of Part Numbers

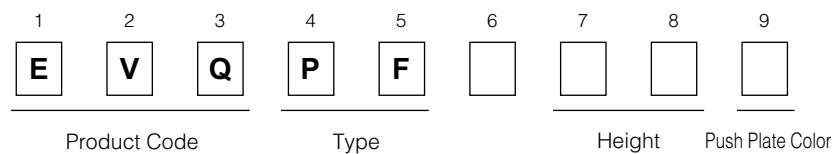

■ Specifications

Type		Snap action/Push-on type SPST	
Electrical	Circuit Diagram		
	Rating	10 μ A 2 Vdc to 20 mA 15 Vdc (Resistiv load)	
	Contact Resistance	50 m Ω max.	
	Insulation Resistance	50 M Ω min. (at 100 Vdc)	
	Dielectric Withstanding Voltage	250 Vac for 1 minute	
Mechanical	Bouncing	3 ms max. (ON) 8 ms max. (OFF)	
	Operating Force	1.0 N \pm 0.4 N 1.3 N \pm 0.4 N 1.6 N \pm 0.5 N	2.6 N \pm 0.6 N
	Travel	0.25 mm \pm 0.10 mm	
Endurance	Operating Life	100000 cycles min.*	50000 cycles min.
Operating Temperature		-20 $^{\circ}$ C to +70 $^{\circ}$ C	
Storage Temperature		-40 $^{\circ}$ C to +85 $^{\circ}$ C (Bulk)	
Minimum Quantity/ Packing Unit	Top-push	500 pcs. Polyethylene Bag (Bulk)	
Quantity/Cartron	Top-push	10000 pcs.	

*1 million cycles also available, consult our salesmen.

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.

■ Dimensions in mm (not to scale)

EVQPF				
<p>Part Numbers</p> <p>EVQPF003M</p> <p>EVQPF004R</p> <p>EVQPF006K</p> <p>EVQPF008K</p> <p>EVQPF103M</p> <p>EVQPF104R</p> <p>EVQPF106K</p> <p>EVQPF108K</p> <p>EVQPF203M</p> <p>EVQPF204R</p> <p>EVQPF206K</p> <p>EVQPF208K</p> <p>EVQPF303M</p> <p>EVQPF304R</p> <p>EVQPF306K</p> <p>EVQPF308K</p>	<p>Operating Force</p> <p>1.0 N</p> <p>1.0 N</p> <p>1.0 N</p> <p>1.0 N</p> <p>1.3 N</p> <p>1.3 N</p> <p>1.3 N</p> <p>1.3 N</p> <p>1.6 N</p> <p>1.6 N</p> <p>1.6 N</p> <p>1.6 N</p> <p>2.6 N</p> <p>2.6 N</p> <p>2.6 N</p> <p>2.6 N</p>	<p>ℓ = Push Plate Place</p> <p>3.15 mm</p> <p>3.85 mm</p> <p>5.85 mm</p> <p>8.35 mm</p> <p>3.15 mm</p> <p>3.85 mm</p> <p>5.85 mm</p> <p>8.35 mm</p> <p>3.15 mm</p> <p>3.85 mm</p> <p>5.85 mm</p> <p>8.35 mm</p> <p>3.15 mm</p> <p>3.85 mm</p> <p>5.85 mm</p> <p>8.35 mm</p>	<p>Push Plate Color</p> <p>White</p> <p>Red</p> <p>Black</p> <p>Black</p> <p>White</p> <p>Red</p> <p>Black</p> <p>Black</p> <p>White</p> <p>Red</p> <p>Black</p> <p>Black</p> <p>White</p> <p>Red</p> <p>Black</p> <p>Black</p>	<p>Operating Life</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>100000 cycles</p> <p>50000 cycles</p> <p>50000 cycles</p> <p>50000 cycles</p> <p>50000 cycles</p>

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use. Should a safety concern arise regarding this product, please be sure to contact us immediately.