


DSA-132

31.5" Full HD Interactive Digital Signage System

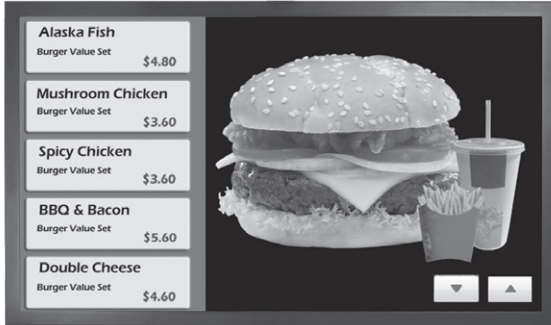

Full HD IP65 Low Power

Specifications

LCD Panel	Size	31.5"	
	Contrast	2500 : 1	
	Pixel Pitch	363 x 363 (um)	
	Viewing Angle (H/V)	178° x 178°	
	Response Time	6.5ms	
	Color	16.7M	
	Brightness (cd/m ²)	450	
	Board	CPU	LGA775 socket for Intel® Core™2 Duo/ Celeron processors
		Chipset	Intel® 945GC + ICH7
		Onboard Graphics	Intel® GMA 950 graphics core
Front Side Bus		800 MHz	
Memory		2 x 240-pin DIMM DDR2 400/533/667 max. up to 2 GB	
HDD		1 x 2.5" SATA HDD tray	
Watchdog Timer		255 levels, 0~255 sec.	
I/O	1 x VGA		
	1 x DVI-D		
	4 x USB 2.0		
	2 x RS-232		
	Ethernet	2 x 10/100/1000Mbps Ethernet	
Expansion Slot	1 x PCIe x4		
Sensors	N/A		
Audio	2 x 2W speaker		
Touchscreen	Infrared (IR) type (optional)		
Power Supply	270W, 110 ~220VAC		
Dimensions	781 mm (30.75") (W) x 144 mm (5.67") (D)		
	x 471 mm (18.55") (H) (DSA-132R)		
	781 mm (30.75") (W) x 134 mm (5.28") (D)		
	x 471 mm (18.55") (H) (DSA-132G)		
Packing Dimensions	TBD		
Weight (net/gross)	31 kg (68.34 lb)/ 32.5 kg (71.65 lb)		
Environment	0° ~ +40°C, operation, 10% ~ 95% relative humidity		

* All specifications and photos are subject to change without notice.
© 2013 Axiomtek Co., Ltd. All rights reserved.

Features

- Pluggable engine box: Easy system configuration and maintenance
- Intel® Core™2 Duo/ Celeron® processors
- 31.5" TFT LCD - Full HD 1920 x 1080P
- IR touchscreen (optional)
- Supports VESA FPM PMI compliant flat panel mount

Overview

Industrial Panel Computers & Monitors

Heavy-duty Fanless Touch Panel Computers

Digital Signage Solutions

Healthcare & Medical Solutions

Open Frame Panel Computers

Accessories

Ordering Information

DSA-132G	31.5" all-in-one full HD digital signage with Intel® 945GC (glass)
DSA-132R	31.5" all-in-one full HD interactive digital signage with Intel® 945GC (IR touch)

* Specification and certifications are based on options and may vary.

Dimensions

