


PARAMETER	MIN.	MAX.	UNITS
Inductance ¹ (No DC)	2.0		H
Inductance @ 20 mA	2.0		H
DCR		210	Ω
Impedance @ 300 Hz	3.10		k Ω
Impedance @ 3.5 kHz	30.0		k Ω
Impedance @ 5.0 kHz	43.0		k Ω
Impedance @ 10 kHz	93.0		k Ω
SRF		18.8	kHz

POWER INDUCTOR P/N L-601

Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C

1. Inductance tested at 300 Hz and 1 V.

PHYSICAL DIMENSIONS inches (mm)

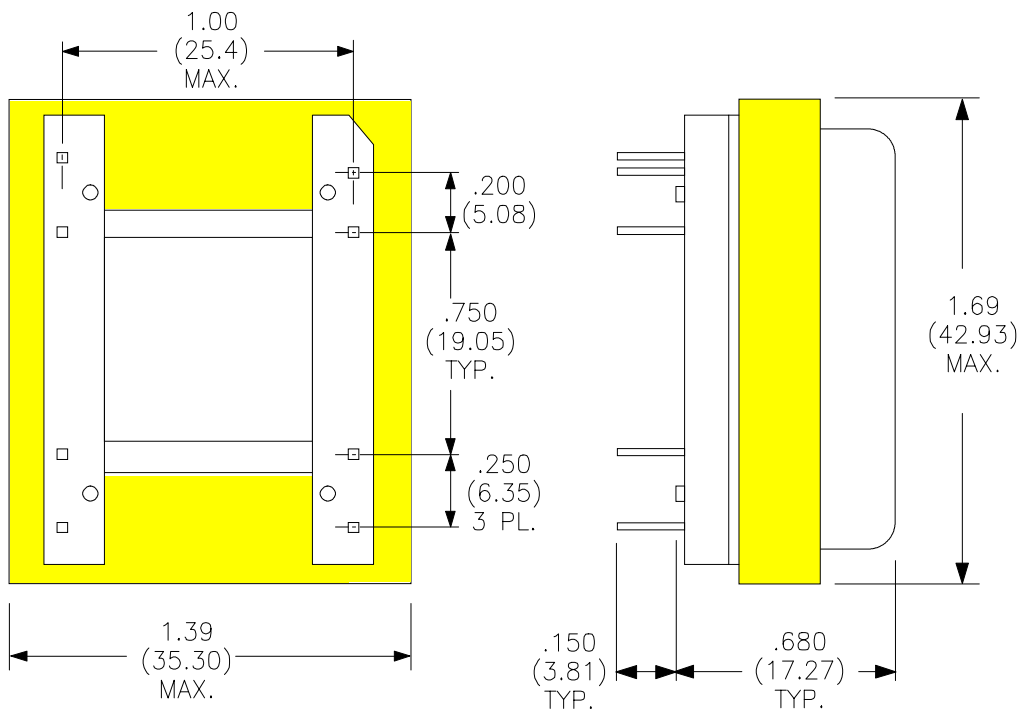

4/10/98