



P/N: NS0001 DATA SHEET

Page : 1/1

Feature




- Standard low profile PCMCIA package.
- Ideal for Type I or Type II applications.
- Transfer molded SMD package.
- Pick and place compatible.
- Designed to withstand IR reflow soldering.
- Support most 10Base-T transceiver chips.
- Operation temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.


Electrical Specifications @ 25°C

Part Number	Turns Ratio (±3%)		OCL (uH Min)	Cw/w (pF Max)	L.L (uH Max)	DCR (Ω Max)	HI-POT (Vrms)
	TX	RX					
NS0001	1CT:1CT	1CT:1CT	200	10	0.20	18	2000

Schematic

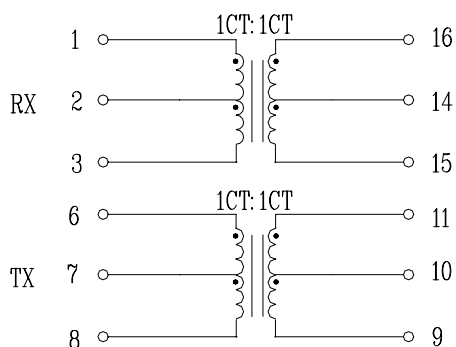

Mechanical

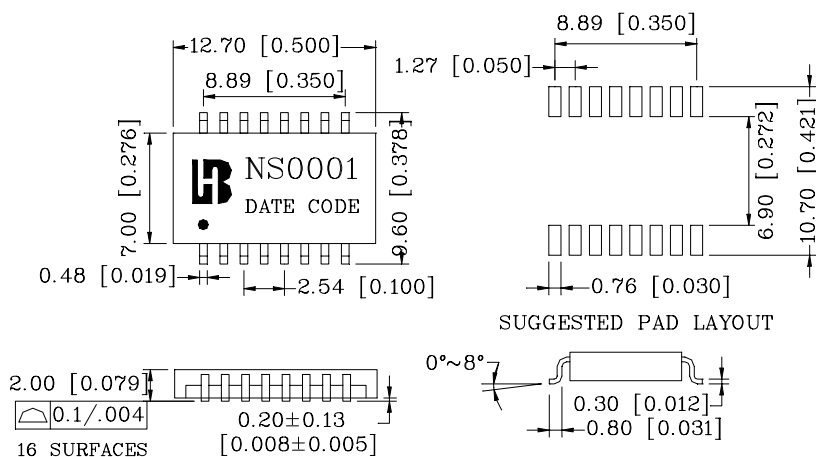

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]