


CEM100

AMD G-Series APU COM Express™ Type 2 Basic Module with AMD A55E FCH Chipset



Double deck DDR3 SO-DIMM

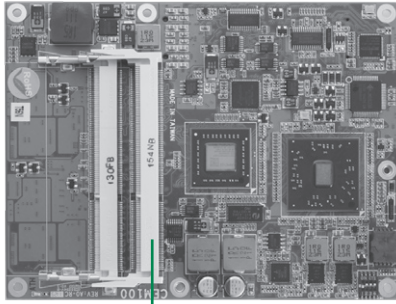

Fanless



Low Power



DualView



DDR3

System

CPU	AMD G-Series APU T56N 1.65 GHz/ T40R 1.0 GHz onboard
System Memory	2 x 204-pin SO-DIMMs support DDR3-1066 max. up to 8 GB
Chipset	AMD A55E FCH
BIOS	AMI
SSD	N/A
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	8 x PCIe x1 devices 4 x 32-bit PCI bus masters
Battery	N/A
Power Requirements	TBD
Size	125 x 95 mm
Board Thickness	2.0 mm
Temperature	0° ~ +60°C (32°F ~ 140°F), operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O


MIO	1 x LPC interface 1 x SPI interface 1 x IDE; PATA-100
SATA	4 x SATA-600 with RAID 0/1/5/10
Hardware Monitoring	N/A
Ethernet	1 port as 10/100/1000Mbps supports Wake-on-LAN, RPL/PXE Boot ROM with Broadcom BCM50610 PHY
Audio	HD link interface to baseboard for external Codec
USB	8 x USB 2.0
TPM 1.2	Infineon SLB9635 for trusted platform
SMBus	Yes
Digital I/O	4 channels IN & 4 channels OUT

Display

Chipset	AMD
Memory Size	Depending on integrated GPU
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single/dual channel 2 x Digital output ports (DP, HDMI, DVI); DPO port is available if LVDS not used

Features

- AMD G-Series APU T56N 1.65 GHz/ T40R 1.0 GHz
- AMD A55E FCH
- 2 DDR3-1066 SO-DIMMs max. up to 8 GB
- 8 lanes of PCIe Gen 2 at 5GT/s
- 4 SATA-600 with RAID 0, 1, 5, 10
- DirectX11, OpenGL 4.0, and OpenCL 1.0 supported
- TPM 1.2 supported



▲ Rear view

Packing List

Quick installation guide, user's manual/utility CD

Ordering Information

Standard

CEM100-T56N (P/N: E38D100100)	COM Express type 2 module with T56N 1.6 GHz APU, VGA/LVDS, 10/100/1000Mbps Ethernet, USB and TPM
CEM100-T40R (Fanless) (P/N: E38D100101)	COM Express type 2 module with T40R 1 GHz APU, VGA/LVDS, 10/100/1000Mbps Ethernet, USB and TPM

Optional

CEB94000	ATX form factor type 2 baseboard
5078D100000E	CEM100 heatspreader module
5078D100100E	COM Express SoM cooling kit with fan
5078D100200E	COM Express SoM cooling kit without fan

SBC
Services
and Solutions

Systems
on
Modules

Embedded
SBCs
>EPIC

Embedded
SBCs
>3.5" Capa

Embedded
SBCs
>Nano-ITX

Embedded
SBCs
>PC-ITX

Embedded
SBCs
>PC/104

Industrial
Mother-
boards

Slot
CPU
Cards

Accessories

Appendix