

6

5


4


3

2



1

### CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
3x1.0mm <sup>2</sup> H05VV-F	INT'L	7.1	5A 250V	BLACK	

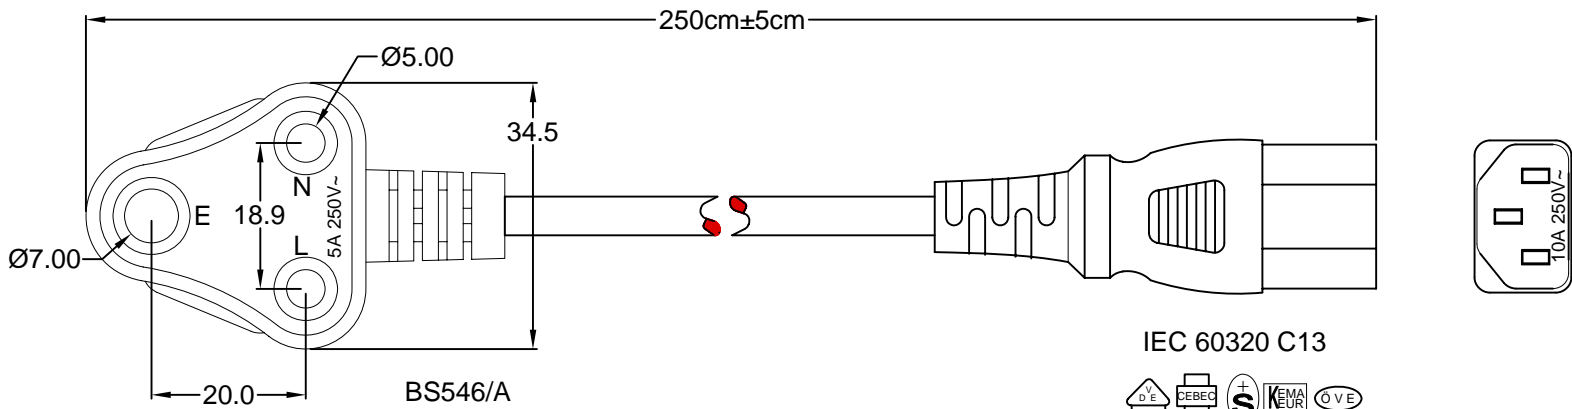

IEC 60320 C13

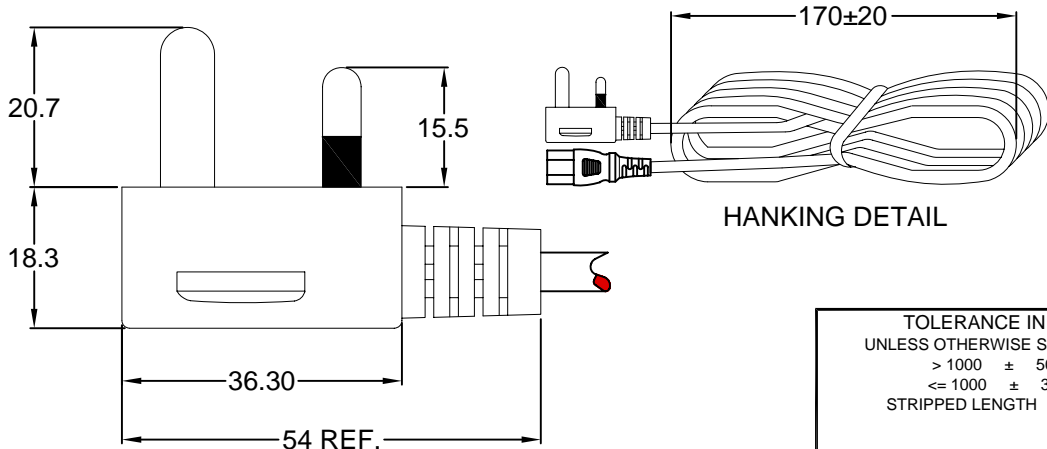

HANKING DETAIL

**RoHS  
COMPLIANT**

REV	DATE	CHANGE	CHNG		CHKD		APPR	
			PB	TD	PB	TD	PB	TD
A	4/20/00	REVISED / REDRAWN	PB	TD	PB	TD		
B	10/17/01	REVISED & UPDATED	TD	PB	PB	PB		
C	10/26/01	ADD PLUG 7 CON. DIM	TD	PB	PB	PB		
D	12/1/01	REVISED / UPDATED	GQ	PB	PB	PB		
E	4/08/02	O. RATING WAS 10A	TD	PB	PB	PB		

TOLERANCE IN MM UNLESS OTHERWISE SPECIFIED	
> 1000	± 50
≤ 1000	± 30
STRIPPED LENGTH ± 2	
DRAWN BY	TD
DATE:	4/30/99
CHECK BY	PJ
DATE:	4/30/99
APPR BY	SS
DATE:	4/30/99

**Power Dynamics, Inc.**  
 Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: INDIA / SOUTH AFRICA CORD SET;  
 250cm LONG; BS546/A TO IEC 60320 C13

16012

SIZE: A  
 SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY  
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1  
 REV: E