


TO-18 METAL CAN PACKAGES


OED-ST-1KL3A

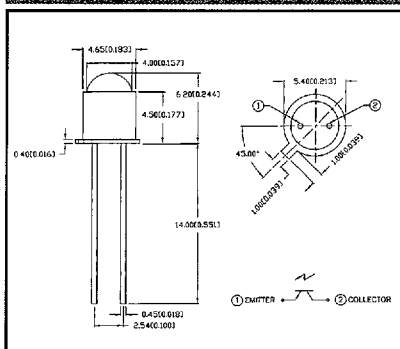

Package Style	Lens	Limits of Safe Operation			ICEO @ 10 V _{CEO} (nA) Max
		V _{CEO} (V) Max	PC (mW) Max	t-opr (°C)	
TO-18 2 Leads	Clear Lens	40	100	-25 ~ + 85	100

I _c (mA) @ EV ~ 1000 Lx				λ _p (nm) Typ	Δ θ deg Typ	λ (nm)	tr/τf @ V _{EC} 5V I _c 1mA
Min	Typ	Max	V _{CE} (V)				
—	5.0	—	5.0	880	±6	550 ~ 1050	4/5 μs

OED-ST-1KL3B

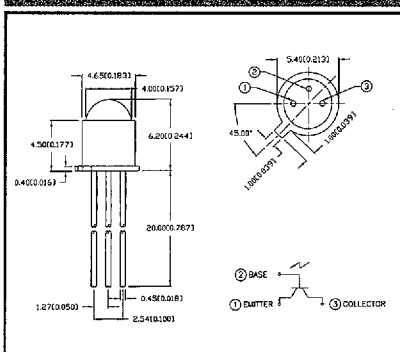

Package Style	Lens	Limits of Safe Operation			ICEO @ 10 V _{CEO} (nA) Max
		V _{CEO} (V) Max	PC (mW) Max	t-opr (°C)	
TO-18 3 Leads	Clear Lens	40	100	-25 ~ + 85	100

I _c (mA) @ EV ~ 1000 Lx				λ _p (nm) Typ	Δ θ deg Typ	λ (nm)	tr/τf @ V _{EC} 5V I _c 1mA
Min	Typ	Max	V _{CE} (V)				
—	5.0	—	5.0	880	±6	550 ~ 1050	4/5 μs