

Aluminum Electrolytic Capacitors



SS Series

(85°C, 5mmL)

MERITEK

FEATURES

- For general purposes series with 5mm height.





SPECIFICATIONS

Item	Characteristic							
Operating Temp Range	- 40 ~ +85°C							
Rated Working Voltage	4 ~ 50VDC							
Capacitance Tolerance (120Hz 20°C)	$\pm 20\% (M)$							
Leakage Current (20°C)	$I \leq 0.01CV$ or $3 (\mu A)$ * Whichever is greater after 2 minutes						I : Leakage Current (μA) C : Rated Capacitance(μF) V : Working Voltage (V)	
Surge Voltage (20°C)	W.V.	4	6.3	10	16	25	35	50
	S.V.	5	8	13	20	32	44	63
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	4	6.3	10	16	25	35	50
	tan δ	0.35	0.24	0.20	0.16	0.14	0.12	0.10
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)	4	6.3	10	16	25	35	50
	-25°C / +20°C	7	4	3	2	2	2	2
	-40°C / +20°C	15	8	6	4	4	3	3
Load Life	After 1000 hours application of W.V. and +85°C ripple current value , the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rated working voltage)							
	Capacitance Change	$\leq \pm 20\%$ of initial.						
	Dissipation Factor	$\leq 200\%$ of initial specified value						
	Leakage Current	\leq initial specified value						
Shelf Life	At +85°C no voltage application after 1000 hours the capacitor shall meet the limits for load life characteristics. (with voltage treatment)							

PART NUMBER SYSTEM

DIMENSIONS (mm)

Meritek Series	SS	35V	100	M	TR	5x5
Rated Voltage						
Rated Capacitance						
Express in micro farad(μF), First two digits are significant figures, Third digit denotes number of zeros. 'R' denotes decimal point for values less than 10 μF						
Tolerance						
M - ±20%						
Package						
Code	TA	TR	Blank			
	Tape & Ammo	Tape & Reel				
Case size - (D) Diameter x (L) Length in mm (Optional)						

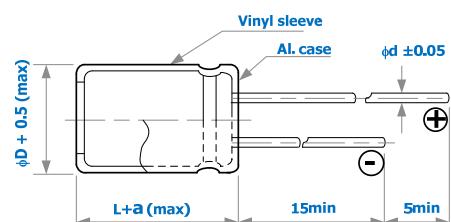

φD	4	5	6.3	8
F	1.5	2.0	2.5	2.5
d	0.45	0.45	0.45	0.45
a	1.0	1.0	1.0	1.0

Aluminum Electrolytic Capacitors



RoHS

SS Series

(85°C, 5mmL)

MERITEK

CASE SIZE & MAX RIPPLE CURRENT

Case size : DxL (mm)
Max. ripple current : mA(rms) 85°C 120Hz

Cap. (uF)	V	4		6.3		10		16		25		35		50		
		Item	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.	DxL	R.C.
0.1														→	4x5	3
0.15														→	4x5	4
0.22														→	4x5	4
0.33														→	4x5	5
0.47														→	4x5	6
0.68														→	4x5	8
1.0														→	4x5	9
1.5														→	4x5	12
2.2												→	4x5	13	4x5	14
3.3									→	4x5	14	4x5	16	4x5	17	
4.7						→	4x5	16	4x5	17	4x5	19	4x5	20		
6.8				→	4x5	17	4x5	19	4x5	21	5x5	26	6.3x5	32		
10		→	4x5	19	4x5	21	4x5	24	4x5	25	5x5	31	6.3x5	39		
15		→	4x5	24	4x5	26	5x5	33	5x5	35	6.3x5	44	6.3x5	48		
22	4x5	24	4x5	29	4x5(5x5)	31(36)	5x5	40	5x5(6.3x5)	43(49)	6.3x5	55	6.3x5(8x5)	60(70)		
33	4x5	29	4x5(5x5)	35(40)	4x5(5x5)	38(44)	5x5(6.3x5)	49(55)	6.3x5	60	6.3x5(8x5)	65(75)	8x5	85		
47	4x5	35	5x5	48	5x5(6.3x5)	50(60)	6.3x5	65	6.3x5(8x5)	70(85)	8x5	90				
68	5x5	47	6.3x5	65	6.3x5	70	6.3x5	80	8x5	100						
100	6.3x5	65	6.3x5	80	6.3x5(8x5)	90(100)	6.3x5(8x5)	100(110)	8x5	120						
220	6.3x5	100	8x5	140	8x5	150										
330	8x5	140	8x5	170												

All blank voltage on sleeve marking is the same voltage as “→” point to.