
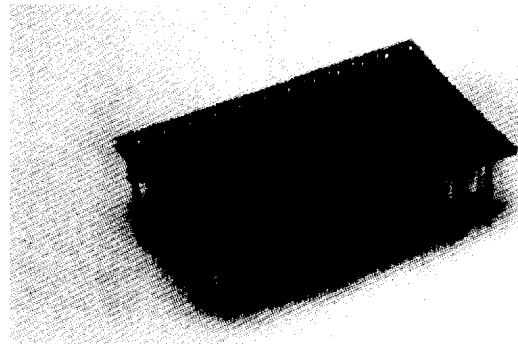


Tape Sealed DIP Sockets

Tape Seal available on all sockets.

Dual In-Line



Features:

- Removable tape seal protects plated contact in harsh environments.
- Sealed socket will not allow dirt and other contaminants to enter socket chamber and become entrapped behind contact fingers.
- Spray flux without contaminating contact area.
- When ordering add 3M to end of part number.
- See DIP pages 8 - 13 for additional material and dimensional information.

Terminals and Contacts:

Terminal: Brass - Copper Alloy 360, ASTM-B-16

Contact: Beryllium Copper - Copper Alloy 172, ASTM-B-194

Plating:

Terminal: Gold over Nickel or Tin-Lead over Nickel

Contact: Gold over Nickel or Tin-Lead over Nickel

Body Material:

LS/DS - Glass filled thermoplastic Polyester (P.B.T.) U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)


HLS/HDS - High Temp. Glass Filled Thermoplastic, U.L. Rated 94V-O, -60°C to 260°C (-76°F to 500°F)

KS - Polyimide Film Temp. range -269°C to 400°C (-452°F to 752°F)

Tape Seal:

Silicone Backed Polyimide Film, -74°C to 260°C (-100°F to 500°F)
Intermittent to 371°C (700°F)

Terminal Information

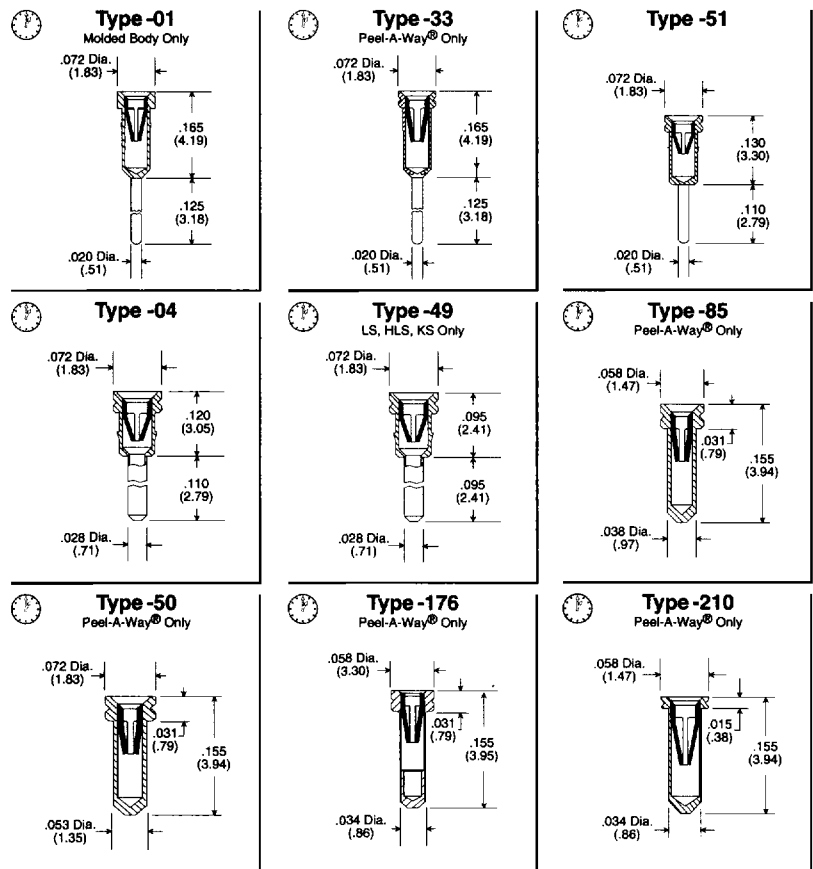

Quick turn delivery available on standard terminal types. Additional terminal types available. See terminal section for detailed terminal information.

How To Order

