
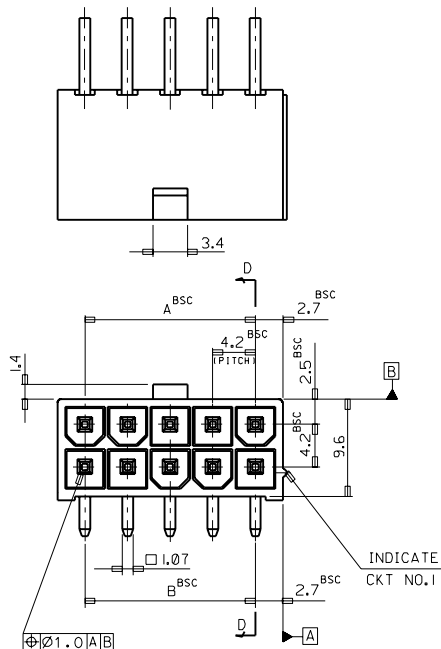


RECOMMENDED P.C. BOARD PATTERN



SECT. D-D

NOTES

1. WHEN MATED WITH 5557-NR, 5557-NR-210 TO BE SURELY LOCKED.
2. MATERIAL: WAFER — NYLON66 UL94V-0
NYLON66 UL94V-2
PIN — BRASS (TIN PLATED)

LEGEND

- 35318 - ** * *
- 0: NATURAL
 - 1: BLACK
 - 1: NYLON66 UL94V-0
 - 2: NYLON66 UL94V-2
 - CKT

46.2	46.2	35318	-24**	24
42.0	42.0		-22**	22
37.8	37.8		-20**	20
33.6	33.6		-18**	18
29.4	29.4		-16**	16
25.2	25.2		-14**	14
21.0	21.0		-12**	12
16.8	16.8		-10**	10
12.6	12.6		-08**	8
8.4	8.4		-06**	6
4.2	4.2	35318	-04**	4
A	B	ENG. NO.	CIRCUIT	

B		REVISED	96-022	96/2/26	MATERIAL		moLEX MOLEX-KOREA CO., LTD.	
A		NEW RELEASED	94-074	94/12/20	GENERAL TOLERANCE		DRAWN BY D.J.KIM	
1		REVISED	94-017	94/9/7	DIMENSION ± 0.3		CHK'D BY	
0		PRE-RELEASED	93/5/1		ANGLE ± 1°		SCALE 3/1	
LTR		REVISION RECORD	ECN	DATE	DIMENSION CLASSIFICATION		TITLE:	
					CRITICAL MAJOR		NEW MINI FIT CONN.	
					REFERENCE		R/A WAFER ASSY	
					ASSY PART		ENG. NO.	
					DESCRIPTION		SD-35318-*****	
					ENG. NO.		REV B	
					REVISION RECORD			
					ENG. NO.			