

PIN Diode π Quad Attenuator

Features

- 4 PIN diodes in a SOT-25 Plastic Package
- Externally Selectable Bias and RF Matching Network
- Lead-Free (RoHS Compliant) Equivalents Available with 260 °C Reflow Compatibility
- 5 – 3,000 MHz Useable Frequency Band
- + 45 dBm IIP3 @ 1 GHz (50 Ω)
- 2.8 dB Loss @ 1 GHz (50 Ω)
- 36 dB Attenuation @ 1 GHz (50 Ω)

Description and Applications

M/A-COM's MA4P290-1225T & MADP-007167-12250T RoHS equivalent product is a wideband, moderate insertion loss, high IP3, PIN Diode π Quad Attenuator in a low-cost, surface mount SOT-25 package. Four PIN Diodes in one package reduce circuit parasitics and improve circuit density.

These PIN Diode Attenuators perform well where Variable RF Amplitude Control is required in 50 and 75 Ω circuit applications.


Wideband Attenuation Range, Frequency Flatness,

Absolute Maximum Ratings @ 25 °C¹

Parameter	Absolute Maximum
Operating Temperature	-65 °C to +125 °C
Storage Temperature (0 mW Dissipated Power)	-65 °C to +150 °C
Junction Temperature	+175 °C
DC Voltage at Temperature Extremes	! -200 V !
DC Current per diode	200 mA
Mounting Temperature	+235 °C for 10 seconds

1. Exceeding these limits may cause permanent damage.

Package Outline (Topview)

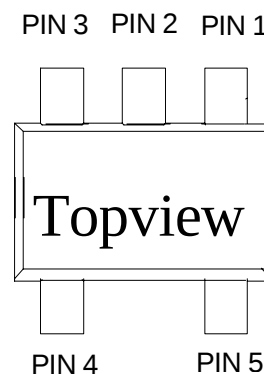

Note: RF INPUT and RF OUTPUT are Functionally Symmetrical

PIN Configuration

PIN	Function	PIN	Function
1	RF INPUT	4	Shunt 1 Bias
2	Series Bias	5	Shunt 2 Bias
3	RF OUTPUT		

Standard Part	RoHS Equivalent Part
MA4P290-1225T	MADP-007167-12250T

PIN Diode π Quad Attenuator

MA4P290-1225T
V2

Electrical Specifications @ 25 °C

Parameter	Condition	Typical	Max.	Unit
Reverse Current (I_R)	$V_r = 200 \text{ V}$		10	μA
Capacitance (C_T)	$F = 1 \text{ MHz}, V = 50 \text{ V}$	0.20	0.30	pF
Resistance (R_S)	$F = 100 \text{ MHz}, I = 1 \text{ mA}$	85		Ω
Resistance (R_S)	$F = 100 \text{ MHz}, I = 10 \text{ mA}$	11	16	Ω
Resistance (R_S)	$F = 100 \text{ MHz}, I = 100\text{mA}$	3		Ω
Minority Carrier Lifetime (T_L)	$I_F = 10 \text{ mA}$	2.7		μS
I Region Width		175		μm



Typical 50 Ω SOT-25 RF Performance @ +25 °C using Wide Band RF Circuit Design (Values Shown include Through Loss Calibrated Out of RF Test Circuit)

Parameter	Frequency Range	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	50 – 3,000 MHz	13 mA / Series Diode and 3.7 V Shunt 1 and 2 Bias $F = 1 \text{ GHz}$	dB		-2.8	
Return Loss	50 – 3,000 MHz	13 mA / Series Diode and 3.7 V Shunt 1 and 2 Bias $F = 1 \text{ GHz}$	dB		-15	
Attenuation	50 – 3,000 MHz	0 mA / Series Diode and 3.7 V Shunt 1 and 2 Bias $F = 1 \text{ GHz}$	dB		-36	
Input IP3	50 – 3,000 MHz	0 V / Series Diode and 3.7 V Shunt 1 and 2 Bias $F_1 = 1010 \text{ MHz}, F_2 = 1020 \text{ MHz}$	dBm		45	
Input IP3	50 – 3,000 MHz	+ 10 V / Series Diode and 3.7 V Shunt 1 and 2 Bias $F_1 = 1010 \text{ MHz}, F_2 = 1020 \text{ MHz}$	dBm		43.5	
Input IP3	50 – 3,000 MHz	0 V / Series Diode and 3.7 V Shunt 1 and 2 Bias $F_1 = 110 \text{ MHz}, F_2 = 120 \text{ MHz}$	dBm		43.5	
Input IP3	50 – 3,000 MHz	+ 10 V / Series Diode and 3.7 V Shunt 1 and 2 Bias $F_1 = 110 \text{ MHz}, F_2 = 120 \text{ MHz}$	dBm		39	
Settling Time	50 – 3,000 MHz	Within 1 dB of Final Attenuation Value $F = 1 \text{ GHz}$	μS		10	
RF C.W. Incident Power	50 – 3,000 MHz	0 – 20 V Series Diode Bias and 3.7V Shunt 1 and 2 Bias	dBm		+ 20	

PIN Diode π Quad Attenuator


MA4P290-1225T
V2

Typical Diode Performance Curves

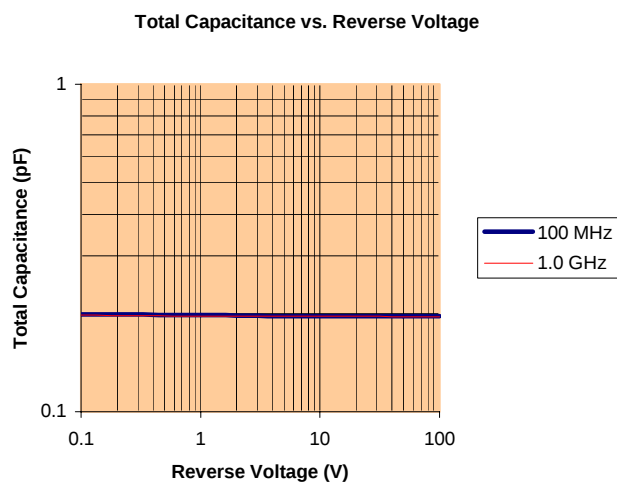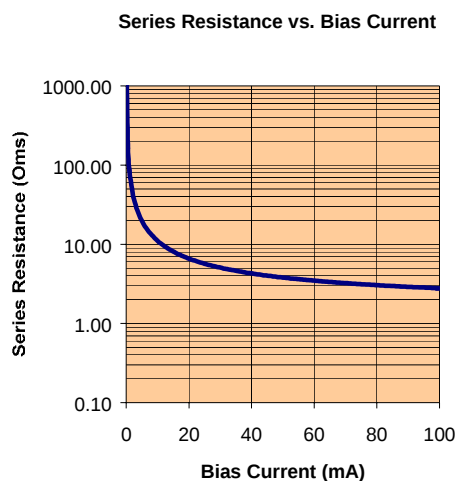

Typical Attenuator Performance



INPUT IP3 vs VOLTAGE

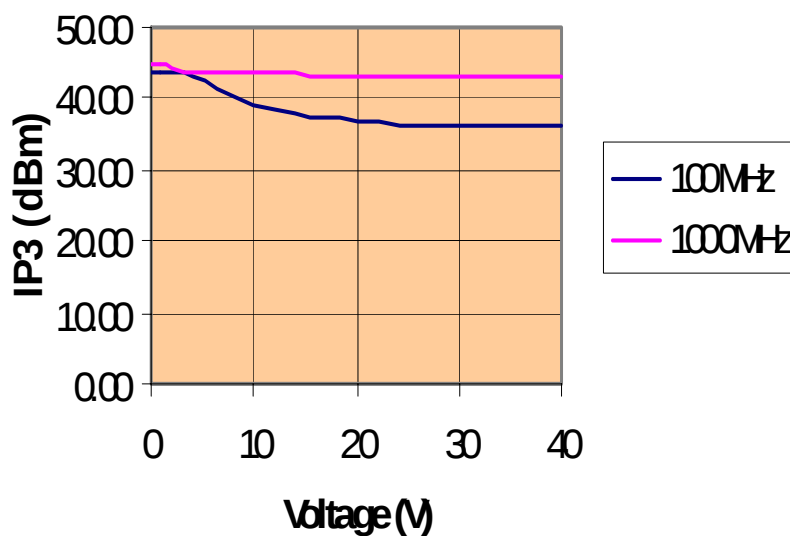

PIN Diode π Quad Attenuator

MA4P290-1225T
V2


Typical Attenuator Performance

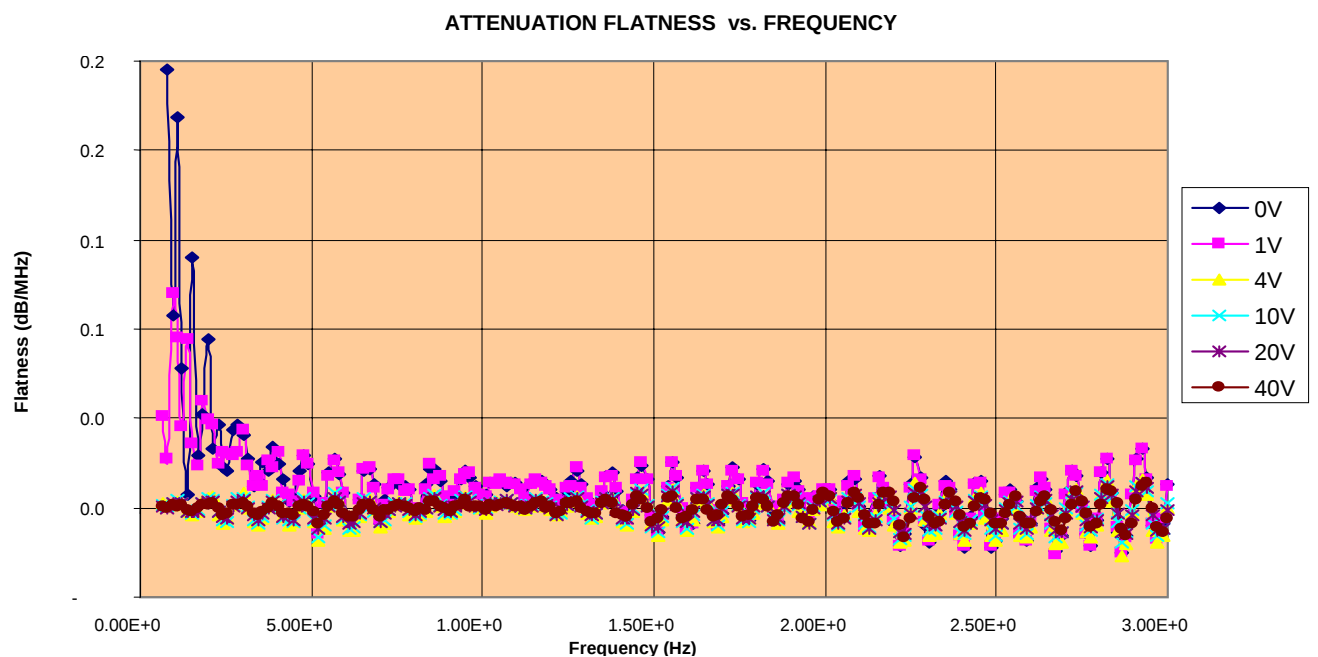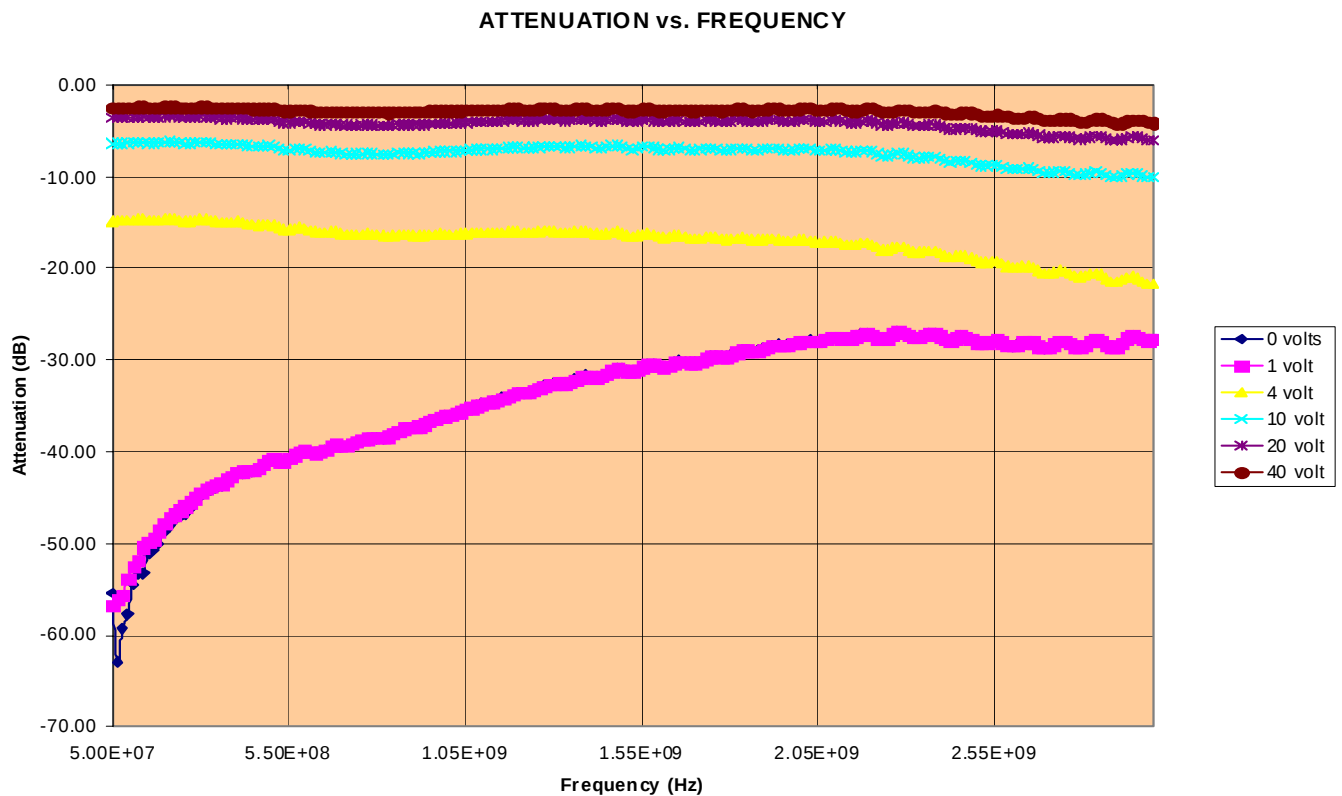

PIN Diode π Quad Attenuator

MA4P290-1225T
V2


RETURN LOSS vs. FREQUENCY

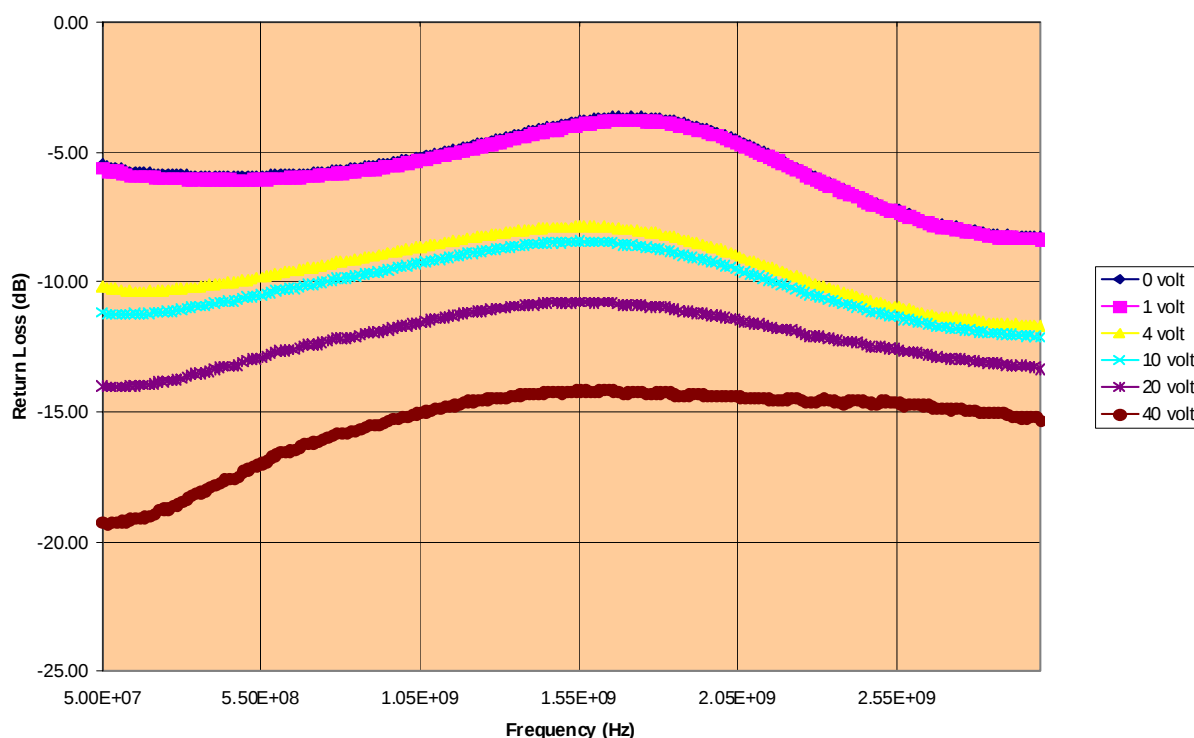

PIN Diode π Quad Attenuator


MA4P290-1225T
V2

Functional Schematic

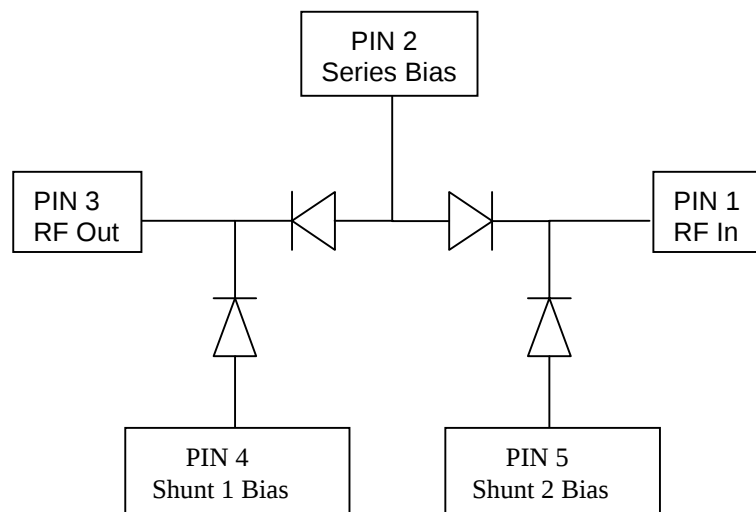

SOT-25

Case Style 1225

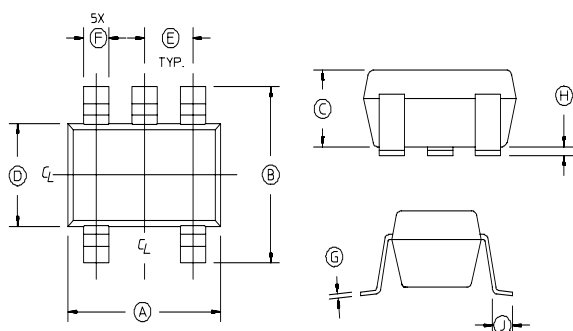

Dim	Inches		Millimeters	
	Min.	Max.	Min.	Max.
A	.1103	.1181	2.80	3.10
B	.1023	.1181	2.6	3.00
C	0.0355	.0512	0.9	1.30
D	0.0591	.0669	1.5	1.70
E	.0374 REF.		0.95 REF.	
F	.0138	.0197	.35	.50
G	.0031	0.0079	.08	0.2
H	.0002	.0059	.05	.15
J	.0138	.0216	.35	.55