



星合电子
XINGHE ELECTRONICS


SR1535 THRU SR15200(SINGLE CHIP)

SCHOTTKY BARRIER RECTIFIER
Reverse Voltage - 35 to 200 Volts
Forward Current - 15Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss ,high efficiency
- High current capability ,low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds, 0.25"(6.35mm)from case

TO-263
D2PAK

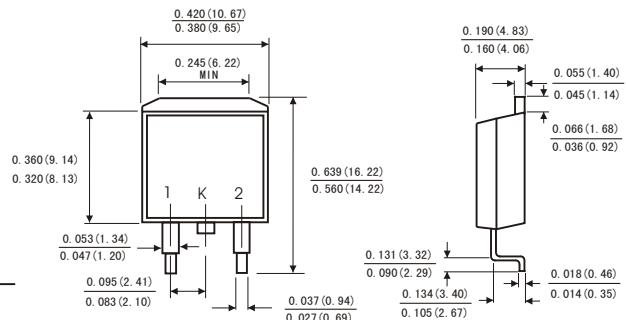

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: JEDEC TO-263 molded plastic body
- Terminals: Solderable per MIL-STD-202,method 208
- Polarity: As marked
- Mounting Position: Any
- Weight: 0.08ounce, 2.24 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SR 1535	SR 1545	SR 1550	SR 1560	SR 15100	SR 15150	SR 15200	Units		
Maximum repetitive peak reverse voltage	V _{RRM}	35	45	50	60	100	150	200	Volts		
Maximum RMS voltage	V _{RMS}	25	32	35	42	70	105	140	Volts		
Maximum DC blocking voltage	V _{DC}	35	45	50	60	100	150	200	Volts		
Maximum average forward rectified current See Fig. 1	I _(AV)	15.0							Amps		
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	150.0							Amps		
Maximum instantaneous forward voltage at 15 A	V _F	0.60		0.75		0.85	0.90	0.95	Volts		
Maximum instantaneous reverse current at rated DC blocking voltage T _c =25°C T _c =125°C	I _R	0.2				30					
Typical thermal resistance (Note 2)	R _{θJC}	3.0							°C/W		
Operating junction temperature range	T _J	-65 to +150							°C		
Storage temperature range	T _{STG}	-65 to +150							°C		

Notes: 1.Pulse test: 300 μ s pulse width,1% duty cycle

2.Thermal resistance from junction to case



星合电子
XINGHE ELECTRONICS

SR1535 THRU SR15200(SINGLE CHIP)

SCHOTTKY BARRIER RECTIFIER
Reverse Voltage - 35 to 200 Volts
Forward Current - 15Amperes

FIG.1-FORWARD CURRENT DERATING CURVE

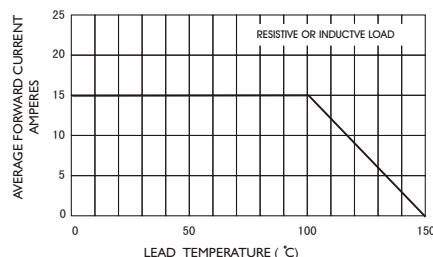


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

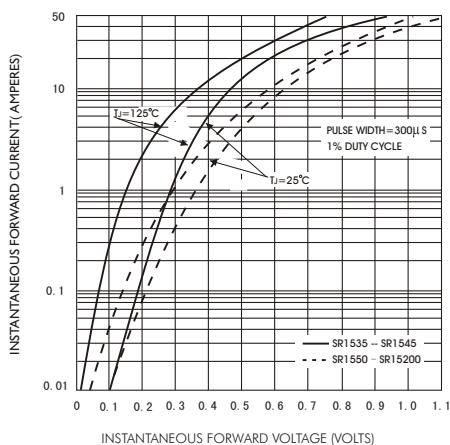


FIG.5-TYPICAL JUNCTION CAPACITANCE

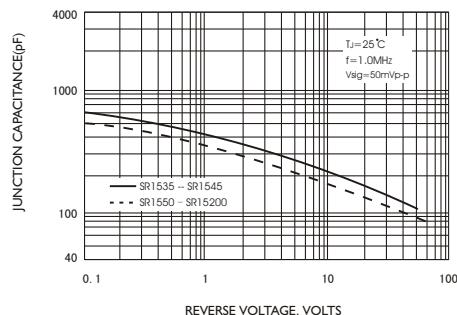


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

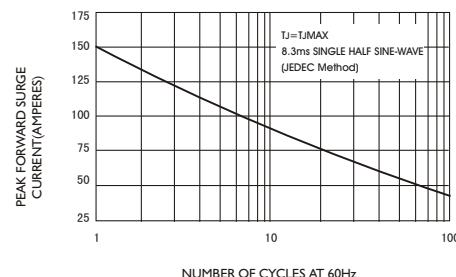


FIG.4-TYPICAL REVERSE CHARACTERISTICS

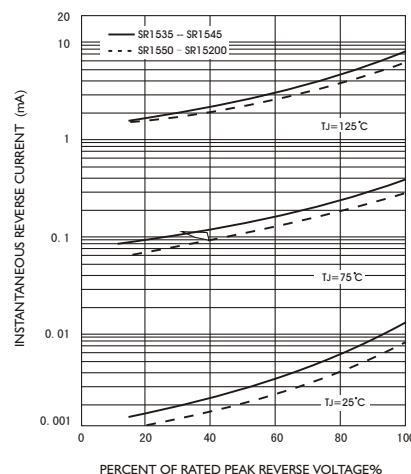


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

