
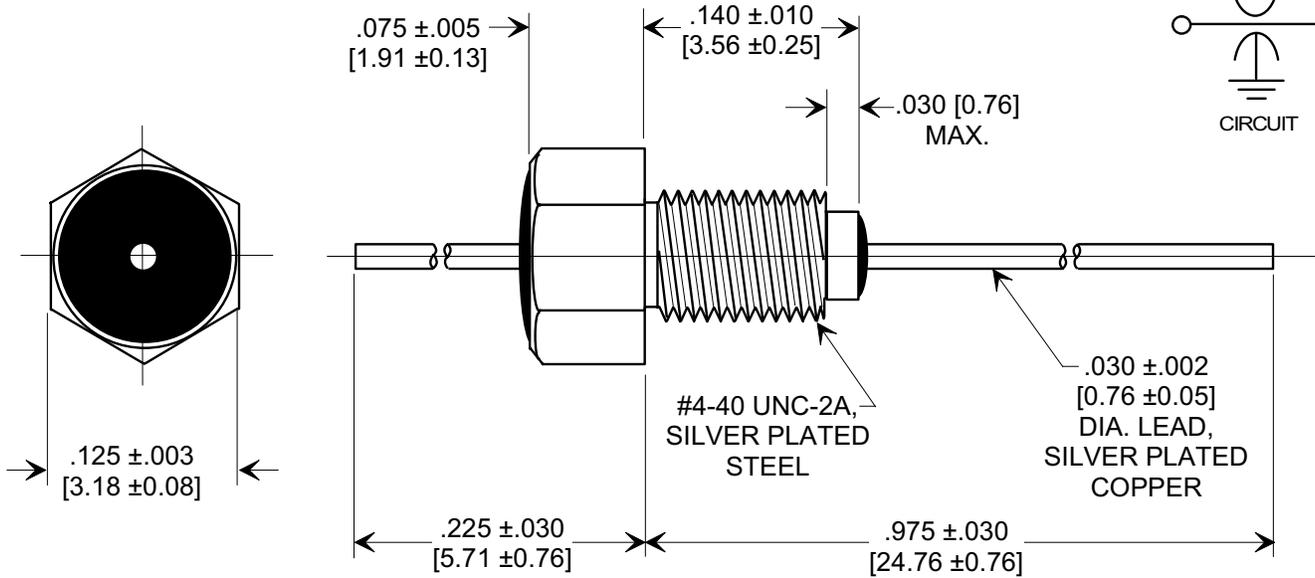




MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.

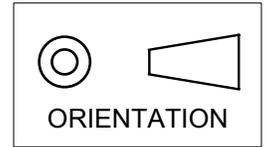

MOUNTING HARDWARE

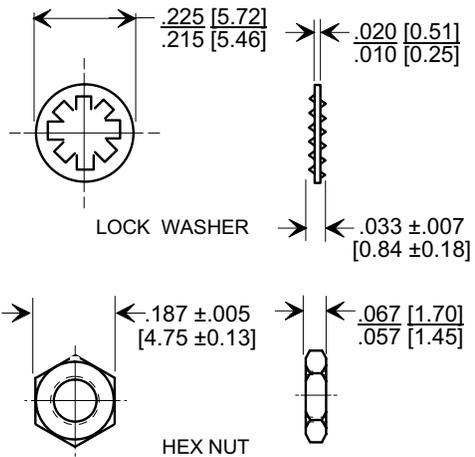

NOTES:

1. OPERATING TEMPERATURE RANGE: -55°C TO +125°C.
2. SILVER PLATED CASE, LEAD AND MOUNTING HARDWARE.
3. MAX. RECOMMENDED MOUNTING TORQUE : 2.0 lb. - in.
4. MAX. RECOMMENDED SOLDERING TEMPERATURE : 260°C.
SEE INSTALLATION RECOMMENDATIONS.
5. NUT AND LOCKWASHER INCLUDED.
6. TUSONIX TRADEMARK AND PART VARIATION NUMBER STAMPED ON HEX FLATS.

10	GMV	300	200	10	---	---	---	5	20
CAP.(pf)	TOLERANCE	85 °C	125 °C	DC	1 MHz	10 MHz	100 MHz	1 GHz	10 GHz
		DC WORKING VOLTAGE		CURRENT (AMPS)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220				

REVISION RECORD	Original Release	0	20011015-4-05	WAS SK 8025-000 L.E. 10-17-01	C.O.	--TOLERANCES-- Unless Otherwise Specified		Title MINIATURE BUSHING STYLE EMI FILTER	
	DECIMAL ± NOTED					Drawn S.M. 10-11-01 Scale 8 X			
	ANGLES ± NOTED					Approved B.Mc. 10-11-01			
	TUSONIX TUCSON, ARIZONA					A	4403-061		