

120x120x38mm

AC AXIAL FAN

FQA1-12038 Series



INTERNAL SENSOR



EXTERNAL SENSOR

Features:

- Motor: Shaded Pole Induction Motor
- Motor Protection: Impedance Protected
- Bearing Type: Two Ball
- Connection: UL 1430 AWG 22, 280mm Wire Leads or Terminal
- Thermal Sensor: Internal or 250mm Wire Lead
- Frame Material: Aluminum Alloy
- Impeller Material: Plastic UL94V-0
- Operating Temp:
 - Two Ball: -10°C~70°C
- Life Expectancy:
 - Two Ball: 50,000 Hours



Fan-S Division










Model No.	Volt.	Freq.	Current	Power	Rated Speed	Maximum AirFlow		Maximum Static Pressure		Noise Level	Weight
	(VAC)	(Hz)	(A)	(W)	(rpm)	(CMM)	(CFM)	(InAq)	(mmAq)	(dB/A)	(g)
FQA1-12038SBH * 3 **	115	50	0.15~0.19	10.0~16.5	1700~2500	2.51	88.5	0.294	7.450	43.0	570
FQA1-12038TBH * 3 **	115	60	0.14~0.19	9.0~16.5	1500~2650	2.70	95.0	0.200	5.200	43.6	570
FQA1-12038UBH * 3 **	230	50	0.06~0.12	8.0~19.5	1500~2600	2.51	88.5	0.294	7.450	43.0	570
FQA1-12038VBH * 3 **	230	60	0.07~0.12	8.0~19.5	1450~2800	2.70	95.0	0.305	7.750	43.6	570

* Indicates "W" (Wire Leads) or "T" (Terminal)

** Indicates "G" (Internal Thermal Sensor) or "H" (External Thermal Sensor)

Noise is measured at the distance of one (1) meter from the axis of intake.

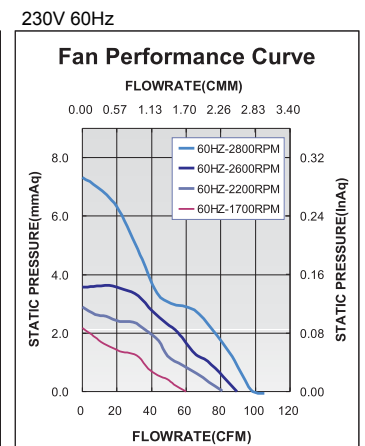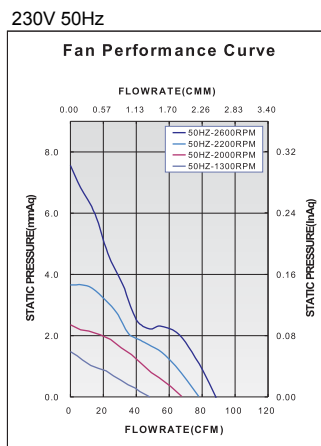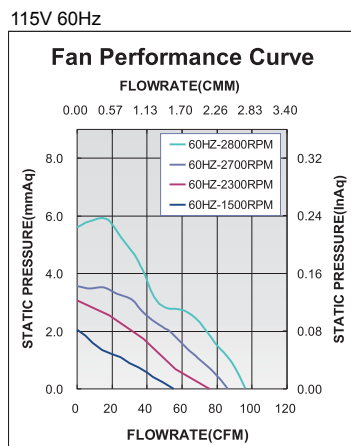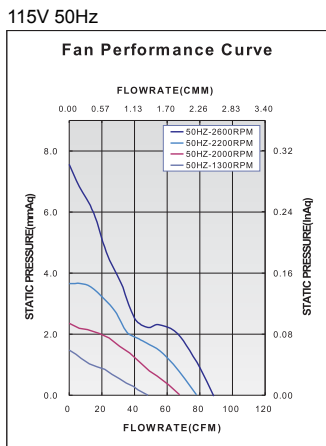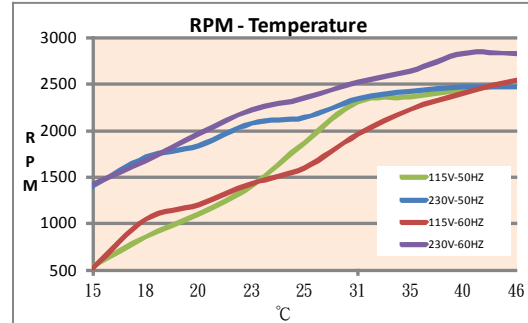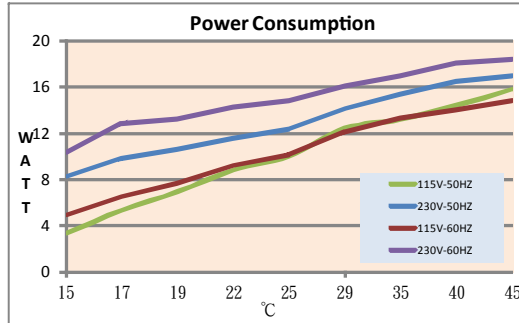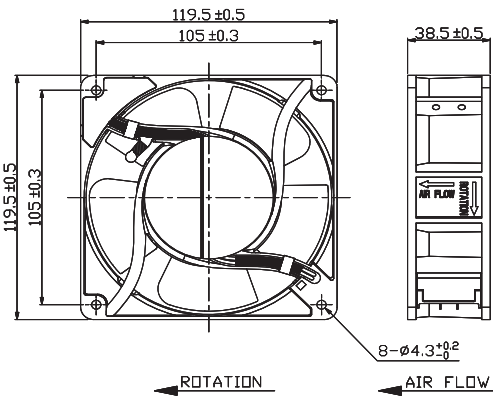

ISO-9001 Company

www.qualtekusa.com