

molex® 2.00mm (.079") Pitch Cable Holder

51048 Vertical, Low Profile For Ribbon Cable

FEATURES AND SPECIFICATIONS

Features and Benefits


- Sizes 2 to 17 circuits
- For topcoated ribbon cable
- Wire range: 26 AWG
- Insulation diameter: 1.60mm (.063") max.
- Strip length: 4.50mm (.177")

Reference Information


Packaging: Bag
Designed In: Millimeters

Physical

Housing: 6/6 nylon, UL 94V-0 and UL 94V-2
Operating Temperature: -40 to +105°C



CATALOG DRAWING (FOR REFERENCE ONLY)

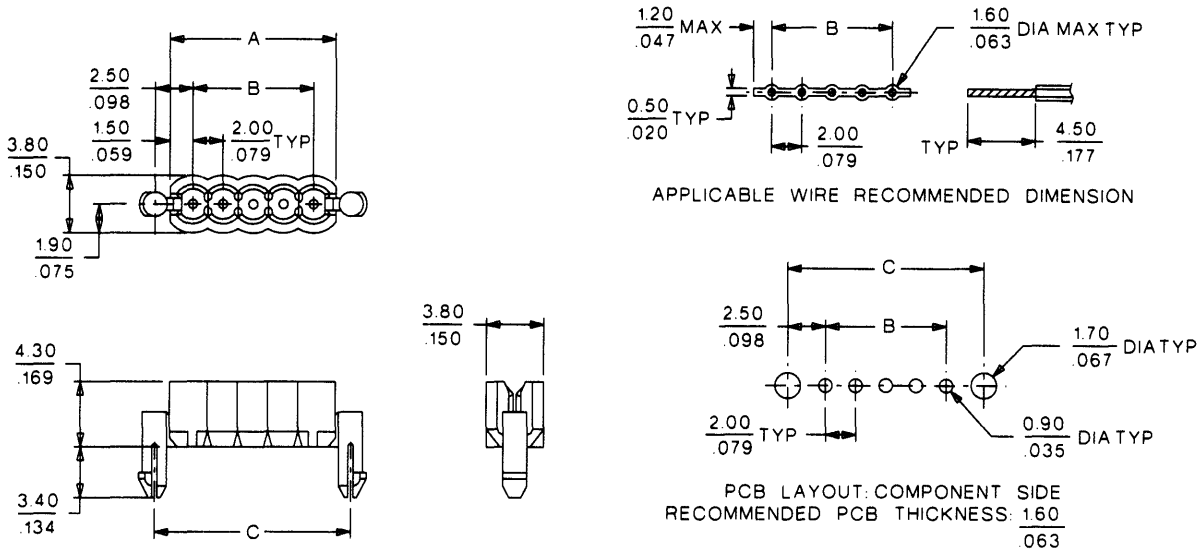

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.		Dimension		
	UL 94V-0	UL 94V-2	A	B	C
2	51048-0210	51048-0200	5.00 (.197)	2.00 (.079)	7.00 (.276)
3	51048-0310	51048-0300	7.00 (.276)	4.00 (.157)	9.00 (.354)
4	51048-0410	51048-0400	9.00 (.354)	6.00 (.236)	11.00 (.433)
5	51048-0510	51048-0500	11.00 (.433)	8.00 (.314)	13.00 (.512)
6	51048-0610	51048-0600	13.00 (.512)	10.00 (.393)	15.00 (.591)
7	51048-0710	51048-0700	15.00 (.591)	12.00 (.472)	17.00 (.670)
8	51048-0810	51048-0800	17.00 (.670)	14.00 (.551)	19.00 (.748)
9	51048-0910	51048-0900	19.00 (.748)	16.00 (.629)	21.00 (.827)
10	51048-1010	51048-1000	21.00 (.827)	18.00 (.708)	23.00 (.906)
11	51048-1110	51048-1100	23.00 (.906)	20.00 (.787)	25.00 (.984)
12	51048-1210	51048-1200	25.00 (.984)	22.00 (.866)	27.00 (1.063)
13	51048-1310	51048-1300	27.00 (1.063)	24.00 (.944)	29.00 (1.141)
14	51048-1410	51048-1400	29.00 (1.142)	26.00 (1.023)	31.00 (1.220)
15	51048-1510	51048-1500	31.00 (1.220)	28.00 (1.102)	33.00 (1.299)
16	51048-1610	51048-1600	33.00 (1.299)	30.00 (1.181)	35.00 (1.378)
17		51048-1700	35.00 (1.378)	32.00 (1.260)	37.00 (1.457)