



FCR150-6/8PA

Description



SOT-89

Mechanical Dimensions

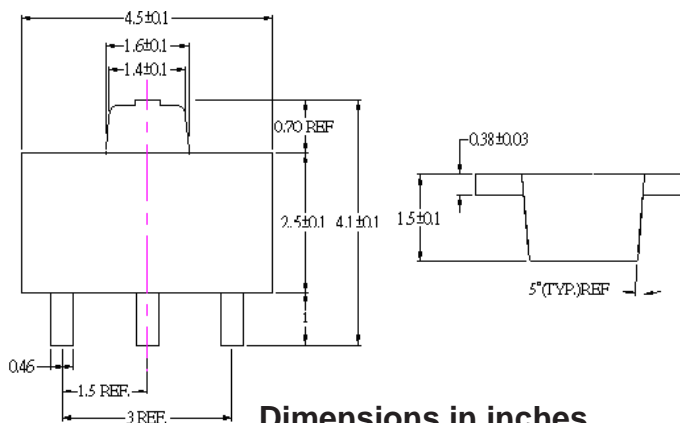

Dimensions in inches

Feature:

- Driven directly with IC and MOS device.
- Feature proprietary, void-free glass passivate chips.
- Available in voltage ratings from 200 to 600 volts. (VDRM and VRRM)
- Sensitive gate trigger current.
- Designed for high volume, line-powered control application in relay lamp drivers, small motor controls, gate drivers for large thyristors.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTICS	SYMBOL	PART NO	DATA	UNIT
Repetitive Peak Off-State Voltage and Repetitive Peak Reverse Voltage (1)	VDRM & VRRM	FCR150-6/8PA	400/600	VOLT
RMS On-State Current at Ta=57°C and Conduction Angle of 180°	IT(RMS)		1.5	AMP
Peak Surge (Non-Repetitive) On-State Current, ½ Cycle, at 50Hz or 60Hz	ITSM		15	AMP
Peak Gate-Trigger Current for 3µ sec, Max	IGTM		1.0	AMP
Peak Gate-Power Dissipation at IGT ≤ IGTM	PGM		0.1	WATT
Average Gate-Power Dissipation	PG(AV)		0.01	WATT
Peak gate reverse voltage	VRGM		6	V
Peak Off-State Current, (1) Ta=25°C VDRM & VRRM=Max. Rating Ta=125°C	IDRM & IRRM		10 100	µA MAX
Maximum On-State Voltage. (Peak) At Tc=25°C and IT =Rated Amps	VTM		1.7	VOLT MAX
DC Holding Current,(1)	IHO		5	mA MAX
Critical Rate-Of-Rise of off-State Voltage.(1) Gate Open, Ta=110°C	Critical dv/dt		35	V/µ sec
DC Gate -Trigger Current for Anode Voltage=7VDC, RL=100Ω	IGT		150	µA MAX
DC Gate -Trigger Voltage for Anode Voltage=7VDC, RL=100Ω	VGT		0.8	VOLT MAX
Gate-Controlled Turn-on Time tD+tR IGT=10mA	Tgt		2.2	µ sec
Thermal Resistance, Junction-to-Case	Rθ J-C		75	°C/WATT TYP
Storage Temperature range	Tstg		-40 to + 150	°C
Operating Temperature Range, Tj	Tooper		-40 to + 110	°C

(1)RGK=1KΩ

