
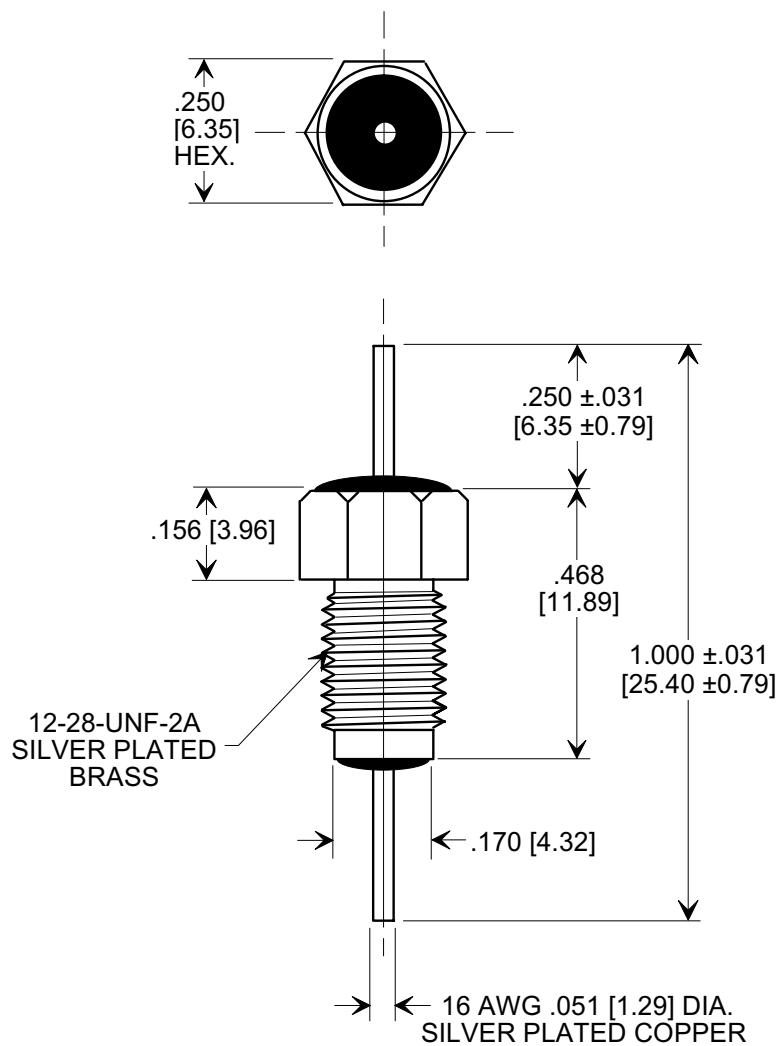



**Electrical Testing  
per Tucsonix standard  
test plans and Mil-Std-202  
Test Methods.**

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

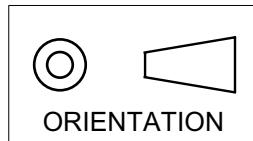

SPECIFICATIONS	
TUSONIX STYLE.	2499-003
Capacitance Value:	5,000 pF
Capacitance Tolerance:	+100 -0%
Temp. Characteristics:	X5W
Rating:	500 WVDC @ 85 °C
Current (A):	20
IR Min @ 100 vdc	10 GΩ
DWV	1500 VDC
Operating Range:	-55° TO +125°C

**NOTE:**  
SUPPLIED WITH SILVER PLATED  
HEX NUT AND INTERNAL TOOTH  
LOCK WASHER

X-2015 Rev-0		
REVISION RECORD		
Original Release C.O.	20040928-3-01	0
		--TOLERANCES-- Unless Otherwise Specified
		DECIMAL $\pm .015$ [0.38]
		ANGLES $\pm \diagup\diagdown$
		Drawn S.M. 09-28-04
		Scale 3 X
		Approved B.Mc. 09-28-04
<b>TUSONIX</b> TUCSON, ARIZONA		A 2499-003-X5WO-502P