

Silicon Zener Diode Series

1N4099 thru 1N4135, 1N4099-1 thru 1N4135-1



Features

- 1N4099-1 thru 1N4135-1 Available in JAN, JANTX, JANTXV and JANS per MIL-PRF-19500/435
- Low Current Operation at 250 μ A
- Low Reverse Leakage and Low Noise Characteristics
- Metallurgically Bonded
- Also available in DO-213 MELF style package

Maximum Ratings


Junction Temperature: -65°C to +175°C

Storage Temperature: -65°C to +175°C

DC Power Dissipation: 500 mW @ +50°C

Power Derating: 4 mW / °C above +50°C

Forward Voltage @ 200mA: 1.1 volts maximum



Electrical Specifications @ +25 °C (Unless Otherwise Specified)

JEDEC TYPE NUMBER (NOTE 1)	NOMINAL ZENER VOLTAGE V_Z @ I_{ZT}	ZENER TEST CURRENT I_{ZT} (NOTE 2)	MAXIMUM ZENER IMPEDANCE (NOTE 3) Z_{ZT} @ I_{ZT}	MAXIMUM REVERSE CURRENT I_R @ V_R		MAXIMUM NOISE DENSITY N_D @ I_{ZT}	MAXIMUM ZENER CURRENT I_{ZM}
	VOLTS	mA	OHMS	μ A	VOLTS	μ V/ $\sqrt{\text{Hz}}$	mA
1N4099	6.8	250	200	10	5.17	40	56
1N4100	7.5	250	200	10	5.70	40	51
1N4101	8.2	250	200	1.0	6.24	40	46
1N4102	8.7	250	200	1.0	6.61	40	44
1N4103	9.1	250	200	1.0	6.92	40	42
1N4104	10	250	200	1.0	7.60	40	38
1N4105	11	250	200	0.05	8.44	40	35
1N4106	12	250	200	0.05	9.12	40	32
1N4107	13	250	200	0.05	9.87	40	29
1N4108	14	250	200	0.05	10.65	40	27
1N4109	15	250	100	0.05	11.40	40	25
1N4110	16	250	100	0.05	12.15	40	24
1N4111	17	250	100	0.05	12.92	40	22
1N4112	18	250	100	0.05	13.67	40	21
1N4113	19	250	150	0.05	14.44	40	20
1N4114	20	250	150	0.01	15.20	40	19
1N4115	22	250	150	0.01	16.72	40	17
1N4116	24	250	150	0.01	18.25	40	16
1N4117	25	250	150	0.01	19.00	40	15
1N4118	27	250	150	0.01	20.46	40	14
1N4119	28	250	200	0.01	21.28	40	14
1N4120	30	250	200	0.01	22.80	40	13
1N4121	33	250	200	0.01	25.08	40	12
1N4122	36	250	200	0.01	27.38	40	11
1N4123	39	250	200	0.01	29.65	40	9.8
1N4124	43	250	250	0.01	32.65	40	8.9
1N4125	47	250	250	0.01	35.75	40	8.1
1N4126	51	250	300	0.01	38.76	40	7.5
1N4127	56	250	300	0.01	42.60	40	6.7
1N4128	60	250	400	0.01	45.60	40	6.4
1N4129	62	250	500	0.01	47.10	40	6.1
1N4130	68	250	700	0.01	51.68	40	5.6
1N4131	75	250	700	0.01	57.00	40	5.1
1N4132	82	250	800	0.01	62.32	40	4.6
1N4133	87	250	1000	0.01	66.12	40	4.4
1N4134	91	250	1200	0.01	69.16	40	4.2
1N4135	100	250	1500	0.01	76.00	40	3.8


NOTE 1: The JEDEC type numbers shown above have a Zener voltage tolerance of + 5% of the nominal Zener voltage.

V_Z is measured with the device junction in thermal equilibrium at an ambient temperature of 25°C + 3°C.

A "C" suffix denotes a + 2% tolerance and a "D" suffix denotes a + 1% tolerance.



Outline Drawing

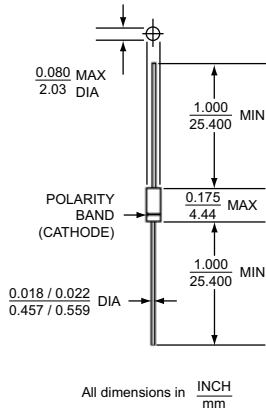

LEADED DESIGN DATA

CASE: Hermetically sealed glass case, DO – 35

LEAD MATERIAL: Copper clad steel

LEAD FINISH: Tin / Lead



THERMAL RESISTANCE: ($R_{\theta JC}$): 250 °C/W maximum at L = .375 in

THERMAL IMPEDANCE: ($Z_{\theta JX}$): 35° C/W maximum

POLARITY: Diode to be operated with the banded (cathode) end positive

MOUNTING POSITION: Any

Graphs

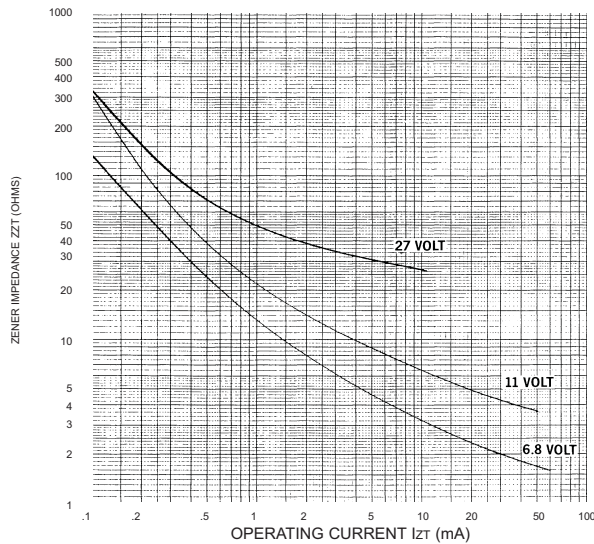

Aeroflex / Metelics, Inc.

975 Stewart Drive,
Sunnyvale, CA 94085
Tel: (408) 737-8181
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

Hi-Rel Components

9 Hampshire Street,
Lawrence, MA 01840
Tel: (603) 641-3800
Fax: (978) 683-3264

www.aeroflex.com/metelics-hirelcomponents

54 Grenier Field Road,
Londonderry, NH 03053
Tel: (603) 641-3800
Fax: (603)-641-3500

ISO 9001: 2008 certified companies

www.aeroflex.com/metelics

metelics-sales@aeroflex.com

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2010 Aeroflex / Metelics. All rights reserved.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.

AEROFLEX
A passion for performance.