


## ZTA Series

- Fast Delivery
- Tape & Reel or Bulk Packaging
- Highly Competitive Prices for Volume Users
- 2.00000MHz to 50.00MHz



Series	Frequency Range	Frequency Tolerance	ESR	Temperature Tolerance	Aging
ZTA--.—MG-	2.00 – 2.99MHz	± 0.5%	80Ω	± 0.3%	± 0.3%
ZTA--.—MG-	3.00 – 3.49MHz	± 0.5%	50Ω	± 0.3%	± 0.3%
ZTA--.—MG-	3.50 – 8.00MHz	± 0.5%	30Ω	± 0.3%	± 0.3%
ZTA--.--MT	5.00 – 6.99MHz	± 0.5%	30Ω	± 0.3%	± 0.3%
ZTA--.--MT	7.00 – 13.00MHz	± 0.5%	25Ω	± 0.3%	± 0.3%
ZTA--.--MX	13.01 – 50.00MHz	± 0.5%	30Ω	± 0.3%	± 0.3%

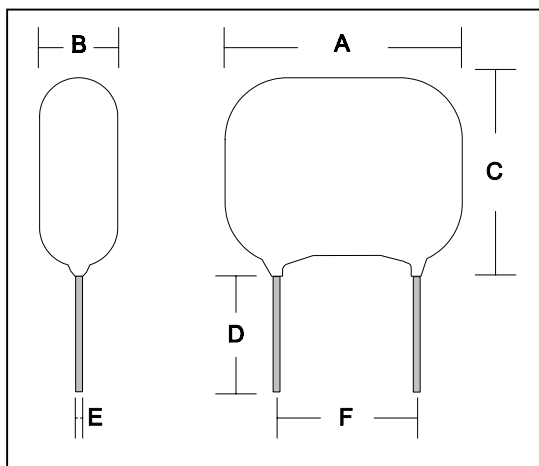

Series	A	B	C	D	E	F
MG	10.00	5.00	7.50	5.00	0.25	5.00
MT	10.00	5.00	10.00	5.00	0.25	5.00
MX	10.00	5.00	10.00	5.00	0.25	5.00

Dimensions in mm