


Tous droits strictement réservés. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriété de FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of FCI.




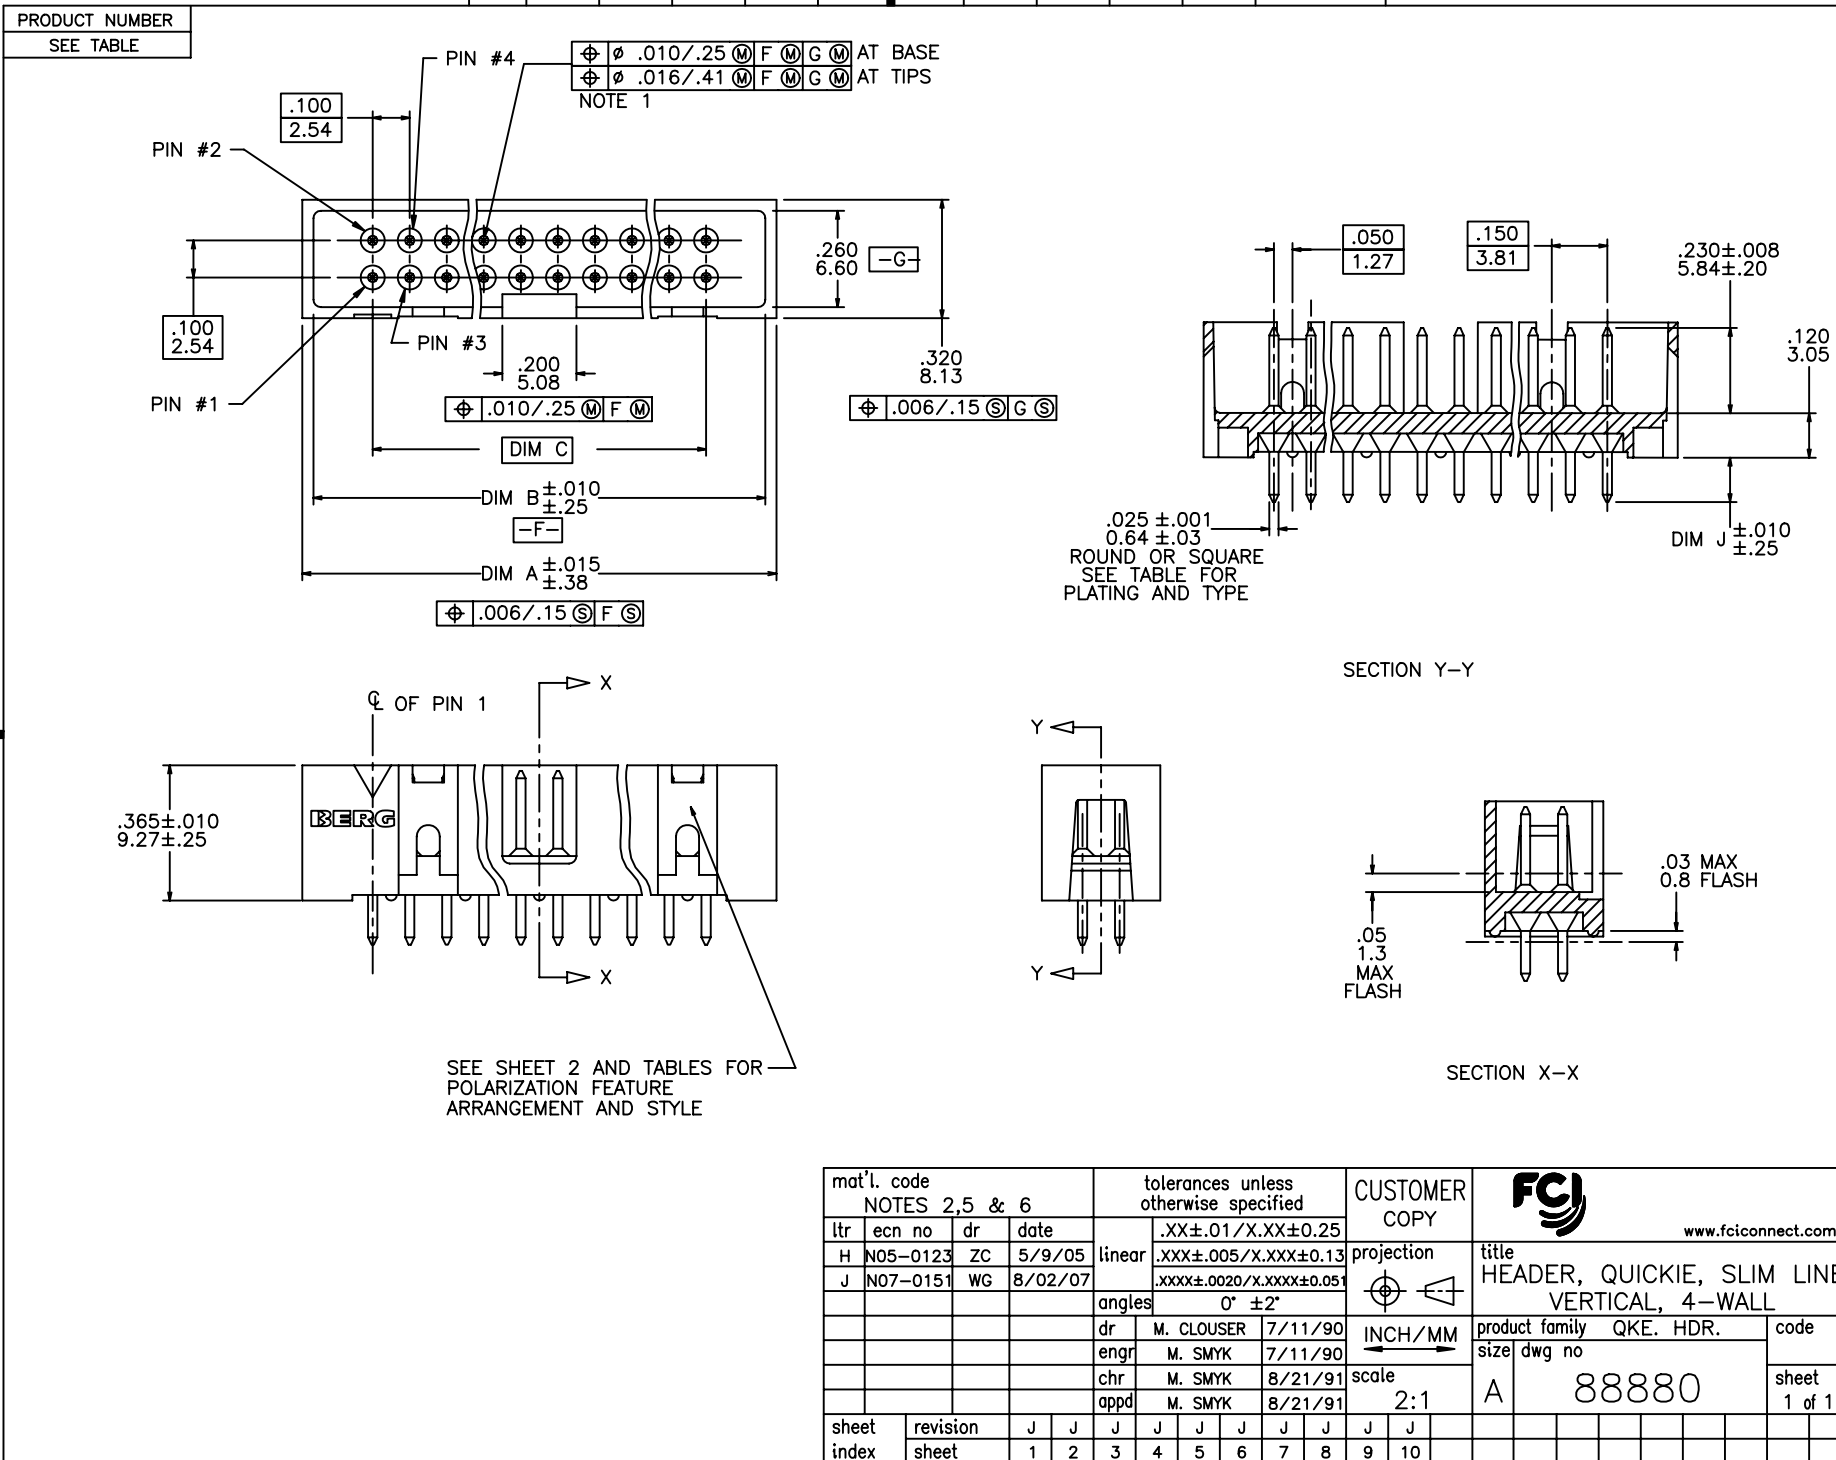


PRODUCT NUMBER
SEE TABLE




2 X 5
STYLE A



2 X 7
STYLE C



2 X 5
STYLE B



2 X 8 THUR 2 X 30
STYLE D

NOTES:

- ① SAME POSITION TOLERANCE APPLIES TO BOTH ENDS OF PINS.
- ② MOLDING MATERIAL: GLASS-FILLED POLYESTER, FLAME RETARDANT PER UL 94 V-0, COLOR: BLUE.
3. 1° MAX. DRAFT PERMISSIBLE ON ALL SURFACES.
4. 4 LBS. /1.8 KG MIN. TERMINAL PULL-OUT FORCE.
- ⑤ TERMINAL MATERIAL: PHOSPHORUS BRONZE.
- ⑥ MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - BLACK.
- ⑦ MOLDING MATERIAL: GLASS FILLED POLYESTER, FLAME RETARDANT PER UL 94V-0, COLOR - GREY.
- ⑧ PART NUMBERS WITH "R" FOLLOWING THE PART NUMBER (EXAMPLE 88880-326 R) HAS RETENTION. (ONLY PARTS WITH .105, .120, AND .150 ROUND OR SQUARE TAILS CAN HAVE RETENTION.) LOCATION IS MANUFACTURES OPTION.
FOR ROUND PIN CONNECTORS:
15 LBS MAX INSERTION AND .25 LB MIN RETENTION FORCE WHEN USED IN .035±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
FOR SQUARE PIN CONNECTORS:
15 LBS MAX INSERTION AND .5 LB MIN RETENTION FORCE WHEN USED IN .040±.003 DIA HOLES AND .062/1.57 THICK PC BOARD.
- ⑨ PART NUMBERS WITH "T" FOLLOWING PART NUMBER (EXAMPLE 88880-068 T IS PACKED IN TUBES.) (CALL PRODUCT MANAGER FOR AVAILABILITY.)
10. PIN REMOVED FOR POLARIZED PART.
11. FOR LEAD FREE P/N JUST ADD "LF" BELOW THE ORIGINAL P/N.
12. THE HOUSING OF XXXX-XYLF WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS.
13. PLATING OPTION: MAYBE EITHER GOLD OR GXT PLATING AT MANUFACTURER' OPTION.

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection	title		
J					.XXX±.005/X.XXX±0.13		HEADER, QUICKIE, SLIM LINE		
					.XXXX±.0020/X.XXXX±0.051		VERTICAL, 4-WALL		
				angles	0° ±2°		product family		code
				dr	M. CLOUSER 7/11/90		QKE. HDR.		
				enr	M. SMYK 7/11/90	scale	size		dwg no
				chr	M. SMYK 8/21/91		A		88880
				appd	M. SMYK 8/21/91	1:1			sheet
sheet index	revision sheet								2 of



PRODUCT NO.	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
88880-001	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 105/2. 67	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	NOTE 2
-002						. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-003						. 675/17. 15	30u" /0. 76u Au OVER 50u" /1. 27u Ni	SQ	
-004						. 105/2. 67	150u" /3. 81u TIN	SQ	
-005						. 150/3. 81	150u" /3. 81u TIN	SQ	
-006	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 675/17. 15	150u" /3. 81u TIN	SQ	
-007	2 X 10	D	1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 105/2. 67	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-008						. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-009						. 675/17. 15	30u" /0. 76u Au OVER 50u" /1. 27u Ni	SQ	
-010						. 105/2. 67	150u" /3. 81u TIN	SQ	
-011						. 150/3. 81	150u" /3. 81u TIN	SQ	
-012	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 675/17. 15	150u" /3. 81u TIN	SQ	
-013	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 105/2. 67	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-014						. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-015						. 675/17. 15	30u" /0. 76u Au OVER 50u" /1. 27u Ni	SQ	
-016						. 105/2. 67	150u" /3. 81u TIN	SQ	
-017						. 150/3. 81	150u" /3. 81u TIN	SQ	
-018	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 675/17. 15	150u" /3. 81u TIN	SQ	
-019	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 105/2. 67	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-020						. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-021						. 675/17. 15	30u" /0. 76u Au OVER 50u" /1. 27u Ni	SQ	
-022						. 105/2. 67	150u" /3. 81u TIN	SQ	
-023						. 150/3. 81	150u" /3. 81u TIN	SQ	
-024	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 675/17. 15	150u" /3. 81u TIN	SQ	
-025	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 105/2. 67	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-026						. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-027						. 675/17. 15	30u" /0. 76u Au OVER 50u" /1. 27u Ni	SQ	
-028						. 105/2. 67	150u" /3. 81u TIN	SQ	
-029						. 150/3. 81	150u" /3. 81u TIN	SQ	
-030	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 675/17. 15	150u" /3. 81u TIN	SQ	
-031	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 105/2. 67	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-032						. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni	RD	
-033						. 675/17. 15	30u" /0. 76u Au OVER 50u" /1. 27u Ni	SQ	
-034						. 105/2. 67	150u" /3. 81u TIN	SQ	
88880-035	2 X 25	D	2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 150/3. 81	150u" /3. 81u TIN	SQ	NOTE 2

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection		title	
J					.XXX±.005/X.XXX±0.13			HEADER, QUICKIE, SLIM LINE	
					.XXXX±.0020/X.XXXX±0.051			VERTICAL, 4-WALL	
				angles	0° ±2°			product family	code
				dr	M. CLOUSER	7/11/90	INCH/MM	QKE. HDR.	
				enr	M. SMYK	7/11/90		size	dwg no
				chr	M. SMYK	8/21/91		A	88880
				appd	M. SMYK	8/21/91			
sheet	revision						scale	1:1	
index	sheet								



PRODUCT NO.	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
88880-036	2 X 25	D	2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 675/17. 15	150u"/3. 81u TIN	SQ	NOTE 2
-037	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24	. 105/2. 67	30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	
-038						. 150/3. 81	30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	
-039						. 675/17. 15	30u"/0. 76u Au OVER 50u"/1. 27u Ni	SQ	
-040						. 105/2. 67	150u"/3. 81u TIN	SQ	
-041						. 150/3. 81	150u"/3. 81u TIN	SQ	
-042	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24	. 675/17. 15	150u"/3. 81u TIN	SQ	
-043	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 105/2. 67	30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	
-044						. 150/3. 81	30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	
-045						. 675/17. 15	30u"/0. 76u Au OVER 50u"/1. 27u Ni	SQ	
-046						. 105/2. 67	150u"/3. 81u TIN	SQ	
-047						. 150/3. 81	150u"/3. 81u TIN	SQ	
-048	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 675/17. 15	150u"/3. 81u TIN	SQ	
-049	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 150/3. 81	30u"/0. 76u GXT WITH GOLD FLASH	RD	
-050	2 X 10	D	1. 28/32. 5	1. 22/31. 0	. 900/22. 86				
-051	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48				
-052	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64				
-053	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26				
-054	2 X 25	D	2. 78/70. 6	2. 72/69. 1	2. 400/60. 96				
-055	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24				
-056	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 150/3. 81	30u"/0. 76u GXT WITH GOLD FLASH		
-057	2 X 30		3. 28/83. 3	3. 22/81. 8	2. 900/73. 66	. 105/2. 67	30u"/0. 76u Au OVER 50u"/1. 27u Ni		
-058						. 150/3. 81	30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	
-059						. 675/17. 15	30u"/0. 76u Au OVER 50u"/1. 27u Ni	SQ	
-060						. 105/2. 67	150u"/3. 81u TIN	SQ	
-061						. 150/3. 81	150u"/3. 81u TIN	SQ	
-062						. 675/17. 15	150u"/3. 81u TIN	SQ	
-063						. 105/2. 67	30u"/0. 76u GXT WITH GOLD FLASH	RD	
-064						. 150/3. 81		RD	
-065	2 X 30	D	3. 28/83. 3	3. 22/81. 8	2. 900/73. 66	. 675/17. 15		SQ	
-066	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 105/2. 67		RD	
-067	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 675/17. 15		SQ	
-068	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24	. 105/2. 67		RD	
-069	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24	. 675/17. 15		SQ	
88880-070	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 105/2. 67	30u"/0. 76u GXT WITH GOLD FLASH	RD	NOTE 2

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection	title		
J					.XXX±.005/X.XXX±0.13		HEADER, QUICKIE, SLIM LINE		
				angles	.XXXX±.0020/X.XXXX±0.051		VERTICAL, 4-WALL		
				dr	M. CLOUSER 7/11/90	INCH/MM	product family QKE. HDR.		
				enr	M. SMYK 7/11/90	scale	size dwg no		
				chr	M. SMYK 8/21/91	1:1	A 88880		
				appd	M. SMYK 8/21/91		sheet 4 of		
sheet index	revision sheet								



PRODUCT NO. NOTE 8 & 9	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL
88880-071	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 675/17. 15	30u" /0. 76u GXT WITH GOLD FLASH	SQ	NOTE 2
-072	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 105/2. 67		RD	
-073	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 675/17. 15		SQ	
-074	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 105/2. 67		RD	
-075	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 675/17. 15		SQ	
-076	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 105/2. 67		RD	
-077	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 675/17. 15		SQ	
-078	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 105/2. 67		RD	
-079	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 675/17. 15		SQ	
-080	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 105/2. 67		RD	
-081	2 X 25	D	2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 675/17. 15	30u" /0. 76u GXT WITH GOLD FLASH	SQ	
-082	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 105/2. 67	15u" /0. 38u Au OVER 50u" /1. 27u Ni	RD	
-083	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 150/3. 81		RD	
-084	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 675/17. 15		SQ	
-085	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24	. 105/2. 67		RD	
-086	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24	. 150/3. 81		RD	
-087	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24	. 675/17. 15		SQ	
-088	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 105/2. 67		RD	
-089	2 X 8		1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 150/3. 81		RD	
-090	2 X 8		1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 675/17. 15		SQ	
-091	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 105/2. 67		RD	
-092	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 150/3. 81		RD	
-093	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 675/17. 15		SQ	
-094	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 105/2. 67		RD	
-095	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 150/3. 81		RD	
-096	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 675/17. 15		SQ	
-097	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 105/2. 67		RD	
-098	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 150/3. 81		RD	
-099	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 675/17. 15		SQ	
-100	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 105/2. 67		RD	
-101	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 150/3. 81		RD	
-102	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 675/17. 15		SQ	
-103	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 105/2. 67		RD	
-104	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 150/3. 81		RD	
88880-105	2 X 25	D	2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 675/17. 15	15u" /0. 38u Au OVER 50u" /1. 27u Ni	SQ	NOTE 2





PRODUCT NO. NOTE 8 & 9	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL
88880-106	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	NOTE 2
-107	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-108	2 X 30	D	3.28/83.3	3.22/81.8	2.900/73.66	.675/17.15	15u"/0.38u Au OVER 50u"/1.27u Ni	SQ	
-109	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.105/2.67	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-110						.150/3.81	30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-111						.675/17.15	30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-112						.105/2.67	150u"/3.81u TIN	SQ	
-113						.150/3.81	150u"/3.81u TIN	SQ	
-114						.675/17.15	150u"/3.81u TIN	SQ	
-115						.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-116						.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-117						.675/17.15	15u"/0.38u Au OVER 50u"/1.27u Ni	SQ	
-118						.105/2.67	30u"/0.76u GXT WITH GOLD FLASH	RD	
-119						.150/3.81	30u"/0.76u GXT WITH GOLD FLASH	RD	
88880-120	2 X 5	B	.78/19.8	.72/18.3	.400/10.16	.675/17.15	30u"/0.76u GXT WITH GOLD FLASH	SQ	NOTE 2
88880-121	DISCONTINUED								
THRU									
88880-216									
88880-217	2 X 12	D	1.48/37.6	1.42/36.1	1.100/27.94	.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	NOTE 2
-218							30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-219							30u"/0.76u GXT WITH GOLD FLASH	RD	
-220						.105/2.67	150u"/3.81u TIN	SQ	
-221						.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-222							30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-223							30u"/0.76u GXT WITH GOLD FLASH	RD	
-224						.150/3.81	150u"/3.81u TIN	SQ	
-225						.675/17.15	15u"/0.38u Au OVER 50u"/1.27u Ni	SQ	
-226							30u"/0.76u Au OVER 50u"/1.27u Ni	SQ	
-227							30u"/0.76u GXT WITH GOLD FLASH	SQ	
-228	2 X 12		1.48/37.6	1.42/36.1	1.100/27.94	.675/17.15	150u"/3.81u TIN	SQ	
-229	2 X 15		1.78/45.2	1.72/43.7	1.400/35.56	.105/2.67	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	
-230							30u"/0.76u Au OVER 50u"/1.27u Ni	RD	
-231							30u"/0.76u GXT WITH GOLD FLASH	RD	
-232						.105/2.67	150u"/3.81u TIN	SQ	
88880-233	2 X 15	D	1.78/45.2	1.72/43.7	1.400/35.56	.150/3.81	15u"/0.38u Au OVER 50u"/1.27u Ni	RD	NOTE 2

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection	title		
J					.XXX±.005/X.XXX±0.13	INCH/MM	HEADER, QUICKIE, SLIM LINE		
				angles	.XXX±.0020/X.XXX±0.051	scale	VERTICAL, 4-WALL		
				dr	0° ±2°	1:1	product family QKE. HDR.		
				enr	M. CLOUSER 7/11/90		size dwg no		
				chr	M. SMYK 7/11/90		A 88880		
				appd	M. SMYK 8/21/91		sheet 6 of		
sheet index	revision sheet								



PRODUCT NO.	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
88880-234	2 X 15	D	1. 78/45. 2	1. 72/43. 7	1. 400/35. 56	. 150/3. 81	30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	NOTE 2
-235						. 150/3. 81	30u"/0. 76u GXT WITH GOLD FLASH	RD	
-236						. 150/3. 81	150u"/3. 81u TIN	SQ	
-237						. 675/17. 15	15u"/0. 38u Au OVER 50u"/1. 27u Ni		
-238							30u"/0. 76u Au OVER 50u"/1. 27u Ni		
-239							30u"/0. 76u GXT WITH GOLD FLASH		
-240	2 X 15		1. 78/45. 2	1. 72/43. 7	1. 400/35. 56	. 675/17. 15	150u"/3. 81u TIN	SQ	
-241	2 X 22		2. 48/63. 0	2. 42/61. 5	2. 100/53. 34	. 105/2. 67	15u"/0. 38u Au OVER 50u"/1. 27u Ni	RD	
-242							30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	
-243							30u"/0. 76u GXT WITH GOLD FLASH	RD	
-244						. 105/2. 67	150u"/3. 81u TIN	SQ	
-245						. 150/3. 81	15u"/0. 38u Au OVER 50u"/1. 27u Ni	RD	
-246							30u"/0. 76u Au OVER 50u"/1. 27u Ni	RD	
-247							30u"/0. 76u GXT WITH GOLD FLASH	RD	
-248						. 150/3. 81	150u"/3. 81u TIN	SQ	
-249						. 675/17. 15	15u"/0. 38u Au OVER 50u"/1. 27u Ni		
-250							30u"/0. 76u Au OVER 50u"/1. 27u Ni		
-251							30u"/0. 76u GXT WITH GOLD FLASH		
-252	2 X 22		2. 48/63. 0	2. 42/61. 5	2. 100/53. 34	. 675/17. 15	150u"/3. 81u TIN		
88880-253	2 X 17	D	1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 105/2. 67	15u"/0. 38u Au OVER 50u"/1. 27u Ni	SQ	NOTE 2
88880-254	UNAVAILABLE								
THRU									
88880-279									
88880-280	2 X 10	D	1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 105/2. 67	150u"/3. 81u TIN	SQ	NOTE 2
88880-281	UNAVAILABLE								
THRU									
88880-306									

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection		title	
J					.XXX±.005/X.XXX±0.13			HEADER, QUICKIE, SLIM LINE	
					.XXX±.0020/X.XXX±0.051			VERTICAL, 4-WALL	
				angles	0° ±2°	INCH/MM		product family	
				dr	M. CLOUSER 7/11/90			QKE. HDR.	
				enr	M. SMYK 7/11/90			code	
				chr	M. SMYK 8/21/91			size dwg no	
				appd	M. SMYK 8/21/91	scale	1:1	A	88880
sheet index	revision sheet								sheet 7 of



PRODUCT NO.	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL
NOTE 8 & 9									
88880-307	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 097/2. 46	30u"/0. 76u GXT WITH GOLD FLASH	SQ	NOTE 2
-308	2 X 5	B	. 78/19. 8	. 72/18. 3	. 400/10. 16				
-309	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24				
-310	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78				
-311	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86				
-312	2 X 12		1. 48/37. 6	1. 42/36. 1	1. 100/27. 94				
-313	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48				
-314	2 X 15		1. 78/45. 2	1. 72/43. 7	1. 400/35. 56				
-315	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64				
-316	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26				
-317	2 X 22		2. 48/63. 0	2. 42/61. 5	2. 100/53. 34				
-318	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96				
-319	2 X 30		3. 28/83. 3	3. 22/81. 8	2. 900/73. 66	. 097/2. 46	30u"/0. 76u GXT WITH GOLD FLASH		
-320	2 X 8		1. 08/27. 4	1. 02/25. 9	. 700/17. 78	. 105/2. 67	30u"/0. 76u Au OVER 50u"/1. 27u Ni		
-321	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96		30u"/0. 76u Au OVER 50u"/1. 27u Ni		
-322	2 X 8		1. 08/27. 4	1. 02/25. 9	. 700/17. 78		50u"/1. 27u Au OVER 50u"/1. 27u Ni		
-323	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 105/2. 67	50u"/1. 27u Au OVER 50u"/1. 27u Ni		NOTE 2
-324	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 120/3. 05	15u"/0. 38u GXT WITH GOLD FLASH		NOTE 6
-325	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 150/3. 81	30u"/0. 76u GXT WITH GOLD FLASH		NOTE 2
-326	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 120/3. 05	15u"/0. 38u GXT WITH GOLD FLASH		NOTE 7
-327	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 120/3. 05	15u"/0. 38u GXT WITH GOLD FLASH		NOTE 7
-328	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 120/3. 05	15u"/0. 38u GXT WITH GOLD FLASH		NOTE 7
-329	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48	. 150/3. 81	15u"/0. 38u Au OVER 50u"/1. 27u Ni		NOTE 2
-330	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96		15u"/0. 38u Au OVER 50u"/1. 27u Ni		
-331	2 X 30		3. 28/83. 3	3. 22/81. 8	2. 900/73. 66		15u"/0. 38u Au OVER 50u"/1. 27u Ni		
-332	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64		15u"/0. 38u Au OVER 50u"/1. 27u Ni		
-333	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 150/3. 81	30u"/0. 76u GXT WITH GOLD FLASH	SQ	
-334	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 105/2. 67	15u"/0. 38u GXT WITH GOLD FLASH	RD	NOTE 2
-335	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 105/2. 67	30u"/0. 76u GXT WITH GOLD FLASH	RD	NOTE 6
-336	2 X 22	D	2. 48/63. 0	2. 42/61. 5	2. 100/53. 34	. 105/2. 67	30u"/0. 76u GXT WITH GOLD FLASH	RD	NOTE 6
-337	2 X 12	D	1. 48/37. 6	1. 42/36. 1	1. 100/27. 94	. 150/3. 81	15u"/0. 38u Au OVER 50u"/1. 27u Ni	SQ	NOTE 2
-338	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 150/3. 81	15u"/0. 38u Au OVER 50u"/1. 27u Ni	SQ	NOTE 2
-339	2 X 4	A	. 68/17. 2	. 62/15. 7	. 300/7. 62	. 105/2. 67	15u"/0. 38u GXT WITH GOLD FLASH	SQ	NOTE 2
88880-340	2 X 10	D	1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 150/3. 81	30u"/0. 76u Au OVER 50u"/1. 27u Ni	SQ	NOTE 2

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection	title		
J					.XXX±.005/X.XXX±0.13		HEADER, QUICKIE, SLIM LINE		
					.XXXX±.0020/X.XXXX±0.051		VERTICAL, 4-WALL		
				angles	0° ±2°		product family QKE. HDR.		
				dr	M. CLOUSER 7/11/90		code		
				enr	M. SMYK 7/11/90	scale	size dwg no		
				chr	M. SMYK 8/21/91		A 88880		
				appd	M. SMYK 8/21/91	1:1	sheet		
sheet	revision						8 of		
index	sheet								



PRODUCT NO.	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL
88880-341	2 X 17	D	1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni	SQ	NOTE 2
-342	2 X 10	D	1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 150/3. 81	15u" /0. 38u GXT WITH GOLD FLASH	SQ	NOTE 2
-343	2 X 17	D	1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 150/3. 81	15u" /0. 38u GXT WITH GOLD FLASH	SQ	NOTE 2
-344	U N A S S I G N E D								
-345	2 X 20	D	2. 28/57. 9	2. 22/56. 4	1. 900/48. 26	. 120/3. 05	15u" /0. 38u GXT WITH GOLD FLASH	SQ	NOTE 7
-346	U N A S S I G N E D								
-347	U N A S S I G N E D								
-348	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 105/2. 67	15u" /0. 38u GXT WITH GOLD FLASH	SQ	NOTE 2
-349	2 X 7	C	. 98/24. 9	. 92/23. 4	. 600/15. 24				
-350	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78				
-351	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86				
-352	2 X 13		1. 58/40. 1	1. 52/38. 6	1. 200/30. 48				
-353	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64				
-354	2 X 20		2. 28/57. 9	2. 22/56. 4	1. 900/48. 26				
-355	2 X 22		2. 48/63. 0	2. 42/61. 5	2. 100/53. 34				
-356	2 X 25		2. 78/70. 6	2. 72/69. 1	2. 400/60. 96				
-357	2 X 30		3. 28/83. 3	3. 22/81. 8	2. 900/73. 66	. 105/2. 67	15u" /0. 38u GXT WITH GOLD FLASH		
-358	2 X 10		1. 28/32. 5	1. 22/31. 0	. 900/22. 86	. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni		
-359	2 X 17		1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 150/3. 81	30u" /0. 76u Au OVER 50u" /1. 27u Ni		NOTE 2
-360	2 X 12	D	1. 48/37. 6	1. 42/36. 1	1. 100/27. 94	. 295/7. 49	15u" /0. 38u GXT WITH GOLD FLASH	SQ	NOTE 7
-361	U N A S S I G N E D								
-362	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 105/2. 67	30u" /0. 76u GXT WITH GOLD FLASH	SQ	NOTE 2
-363	2 X 8	D	1. 08/27. 4	1. 02/25. 9	. 700/17. 78				
-364	2 X 10	D	1. 28/32. 5	1. 22/31. 0	. 900/22. 86				
-365	2 X 15	D	1. 78/45. 2	1. 72/43. 7	1. 400/35. 56				
-366	2 X 17	D	1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 105/2. 67			
-367	2 X 5	A	. 78/19. 8	. 72/18. 3	. 400/10. 16	. 150/3. 81			
-368	2 X 17	D	1. 98/50. 3	1. 92/48. 8	1. 600/40. 64	. 150/3. 81			
88880-369	2 X 25	D	2. 78/70. 6	2. 72/69. 1	2. 400/60. 96	. 150/3. 81	30u" /0. 76u GXT WITH GOLD FLASH	SQ	NOTE 2



mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection		title HEADER, QUICKIE, SLIM LINE VERTICAL, 4-WALL	
J					.XXX±.005/X.XXX±0.13				
					.XXXX±.0020/X.XXXX±0.051				
				angles	0° ±2°		INCH/MM	product family QKE. HDR. code	
				dr	M. CLOUSER 7/11/90				
				enr	M. SMYK 7/11/90				
				chr	M. SMYK 8/21/91				
				appd	M. SMYK 8/21/91	scale	1:1	A 88880 sheet 9 of	
sheet index	revision sheet								



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor.
Property of ©FCI

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.
Propriété de ©FCI.

PRODUCT NO. NOTE 8 & 9	SIZE	STYLE	DIM A	DIM B	DIM C	DIM J	PIN PLATING NOTE 13	PIN TYPE	PLASTIC MATERIAL	POLARIZED PIN
88880-404	2 X 20	D	2.28/57.9	2.22/56.4	1.900/48.26	.120/3.05	15µ/0.38µm GXT WITH GOLD FLASH	SQ	NOTE 2,BLUE	20
-410	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96					-
-418	2 X 10		1.28/32.5	1.22/31.0	.900/22.86					14
-423	2 X 25		2.78/70.6	2.72/69.1	2.400/60.96					25
-426	2 X 17	D	1.98/50.3	1.92/48.8	1.600/40.64					3
88880-427	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.120/3.05	15µ/0.38µm GXT WITH GOLD FLASH	SQ	NOTE 2,BLUE	1
88880-428	2 X 5	A	.78/19.8	.72/18.3	.400/10.16	.150/3.81	30µ/0.76µm GXT WITH GOLD FLASH	RD	NOTE 2,BLUE	10

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/X.XX±0.25	projection		title	
H					.XXX±.005/X.XXX±0.13			HEADER, QUICKIE, SLIM LINE	
					.XXX±.0020/X.XXX±0.051			VERTICAL, 4-WALL	
				angles	0° ±2'	INCH/MM		product family	
				dr	E KROPIEWNICKI 4/26/96			QKE. HDR.	
				enr	L. FYE 4/26/96			code	
				chr	L. FYE 4/26/96	scale	A	size	
				appd	L. FYE 4/26/96			dwg no	
sheet index		revision sheet				1:1		88880	
								sheet 10 of	