


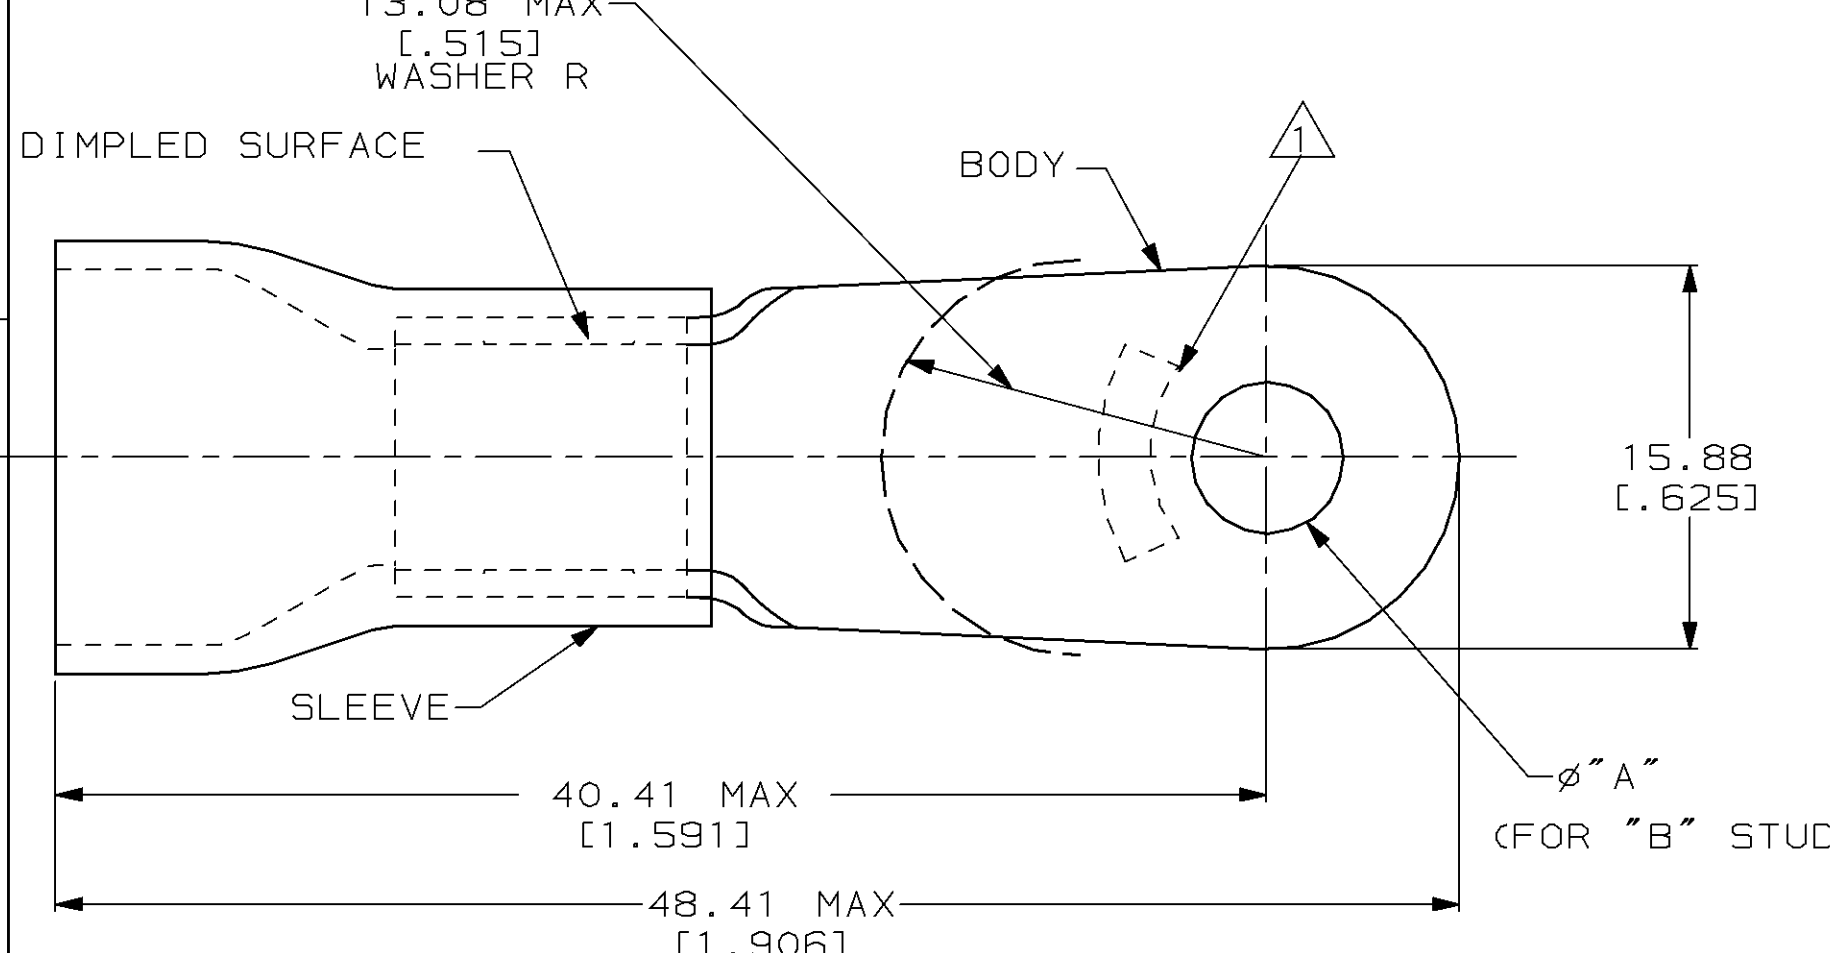

AMP WIRE RANGE	FILE E13288	LR7189 Certified
6 AWG STRANDED	6 AWG STRANDED	6 AWG STRANDED

- NOTE:
1. STAMP AMP 6* LOCATE APPROX AS SHOWN
 2. TONGUE MATERIAL THK 1.14±0.08[.045±.003]
 3. SEE TABLE FOR WIRE INSULATION DIA MAX
 4. FOREIGN PRODUCTION ONLY
 5. TAPE ITEMS ARE ON 30.48[1.200] CENTERS

11.43 [.450]	3/8	9.91±0.13 [.390±.005]	20	LOOSE PC, BOX SPL	9-52264-5
	5/16	8.33±0.13 [.328±.005]			8-52264-5
	3/8	9.91±0.13 [.390±.005]	500	ON TAPE	52264-5
	5/16	8.33±0.13 [.328±.005]			52264-4
9.14 [.360]	3/8	9.91±0.13 [.390±.005]	-	LOOSE PC	52264-3
	5/16	8.33±0.13 [.328±.005]			52264-2
11.43 [.450]	3/8	9.91±0.13 [.390±.005]	100		52264-1
	5/16	8.33±0.13 [.328±.005]			52264

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 90°C		WIRE INSULATION DIA		"B"		"A"		QTY	PACKAGE TYPE		PART NO		
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752			VOLTAGE RATING: 600 V MAX		DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.20[.008] 3 PLC DEC ± - ANGLES ± -		DR 9-29-93 S.S. GOULDEN		AMP AMP Incorporated Harrisburg, PA 17105-3608					
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111			CIRCULAR MIL AREA: 10.54-16.77mm² [20,800-33,100] STRANDED		MATERIAL COPPER PER ASTM B-152 PVC, COLOR,BLUE		CHK 9-29-93 R. HERSEY							
FOR ORDER ENTRY		1-800-526-5142			THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		FINISH TIN PLATE PER MIL-T-10727		APPD 9-29-93 B.BARE		NAME					
							PRODUCT SPEC NOT AVAILABLE		APPD 9-29-93 M. ELLIS		TERMINAL, RING TONGUE, PLASTI-GRIP™, WIRE SIZE, 6 AWG					
							APPLICATION SPEC NOT AVAILABLE		PRODUCT SPEC NOT AVAILABLE		SIZE		CAGE CODE		DRAWING NO	
							WEIGHT -		SCALE		B		00779		C-52264	
											NTS		SHEET		1 OF 1	