





# 0.54 INCH (13.7MM) 14 SEGMENT, DUAL DIGIT ALPHA - NUMERIC STICK DISPLAY



**BRIGHT RED** MDA6110C, MDA6140C  
**YELLOW** MDA6310C, MDA6340C  
**GREEN** MDA6410C, MDA6440C  
**HIGH EFF. RED** MDA6910C, MDA6940C

## PACKAGE DIMENSIONS

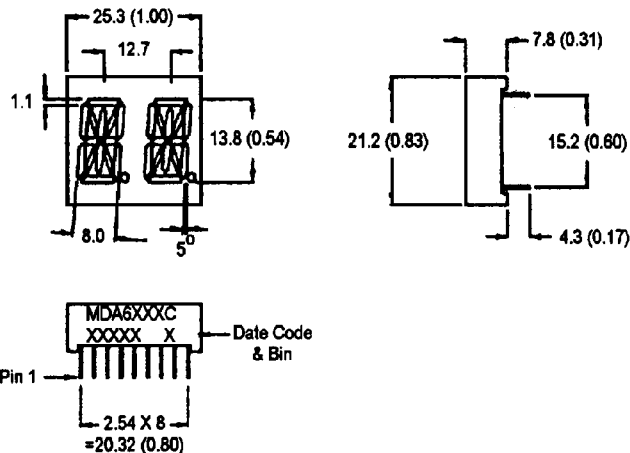

**NOTES:** Dimensions are in mm (inch).  
 All pins are 0.5 (0.02) diameter  
 Tolerances are  $\pm 0.25$  (0.1) unless otherwise noted.

## FEATURES

- Easy to read digits.
- 2 digit common anode or cathode.
- Low power consumption.
- Bold segments that are highly visible.
- High brightness with high contrast
- White segments on a grey face.
- Directly compatible with integrated circuits.
- Rugged plastic/epoxy construction.

## APPLICATIONS

- Digital readout displays.
- Instrument panels.

## MODEL NUMBERS

<u>Part number</u>	<u>Color</u>	<u>Description</u>
MDA6110C	Bright Red	2 Digit; Common Anode; Rt. Hand Decimal
MDA6140C	Bright Red	2 Digit; Common Cathode; Rt. Hand Decimal
MDA6310C	Yellow	2 Digit; Common Anode; Rt. Hand Decimal
MDA6340C	Yellow	2 Digit; Common Cathode; Rt. Hand Decimal
MDA6410C	Green	2 Digit; Common Anode; Rt. Hand Decimal
MDA6440C	Green	2 Digit; Common Cathode; Rt. Hand Decimal
MDA6910C	High Eff. Red	2 Digit; Common Anode; Rt. Hand Decimal
MDA6940C	High Eff. Red	2 Digit; Common Cathode; Rt. Hand Decimal

(For other colour options, contact your local area Sales Office)



**0.54 INCH (13.7MM)  
14 SEGMENT, DUAL DIGIT  
ALPHA - NUMERIC STICK DISPLAY**

**ABSOLUTE MAXIMUM RATING** ( $T_A=25^\circ\text{C}$  unless otherwise specified)


	B.Red MDA 6110C 6140C	Yellow MDA 6310C 6340C	Green MDA 6410C 6440C	High Eff. Red MDA 6910C 6940C	Unit
Part number					
Continuous forward current ( $I_f$ ) Per Segment.....	15	20	30	30	mA
Peak forward current per die ( $I_p$ ). (at $f = 1.0$ KHz, Duty factor = 1/10)	50	80	90	160	mA
Power dissipation ( $P_D$ ).....	40*	70*	70*	90*	mW
*Derate Linearly From $25^\circ\text{C}$ .....	0.17	0.25	0.33	0.33	mW/ $^\circ\text{C}$
Reverse voltage per dice.....					5V
Operating and Storage temperature range.....					- $40^\circ\text{C}$ to $+85^\circ\text{C}$
Lead soldering time (at 1/16 inch from the bottom of lamp).....					5 seconds @ $230^\circ\text{C}$

**ELECTRO - OPTICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)


	B. Red MDA 6110C 6140C	Yellow MDA 6310C 6340C	Green MDA 6410C 6440C	High Eff. Red MDA 6910C 6940C	Test Condition
<u>Part number</u>					
Luminous intensity (ucd) minimum	500	1000	750	1000	$I_f = 20$ mA
typical	1400	4000	5000	4000	
Forward voltage ( $V_f$ ) typical	2.1	2.1	2.1	2.0	$I_f = 20$ mA
maximum	2.6	2.8	2.8	2.8	
Peak wavelength (nm)	697	590	570	635	$I_f = 20$ mA
Spectral line half width (nm)	90	35	30	45	$I_f = 20$ mA
Reverse breakdown voltage ( $V_R$ )	5	5	5	5	$I_f = 100$ $\mu\text{A}$

**PINOUT**

**MDA6X10C - Common Anode; Pin 3 - no connection**

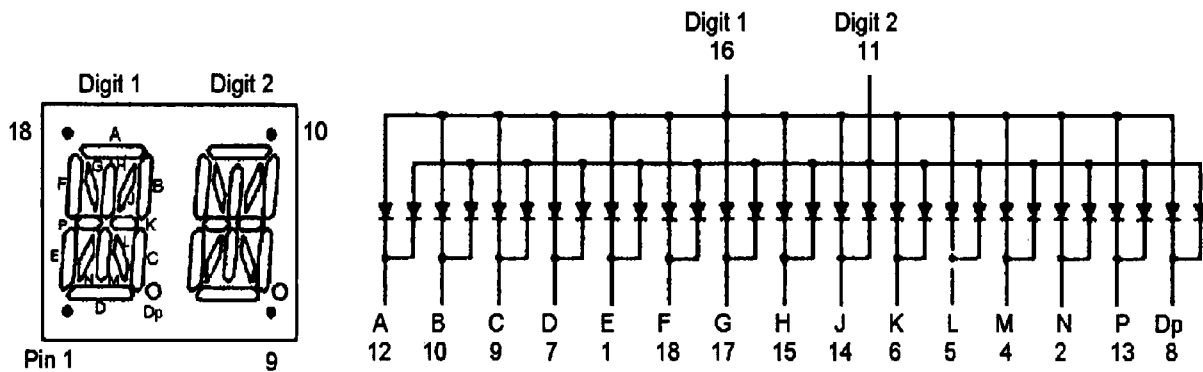

**MDA6X40C - Common Cathode; Pin 3 - no connection**

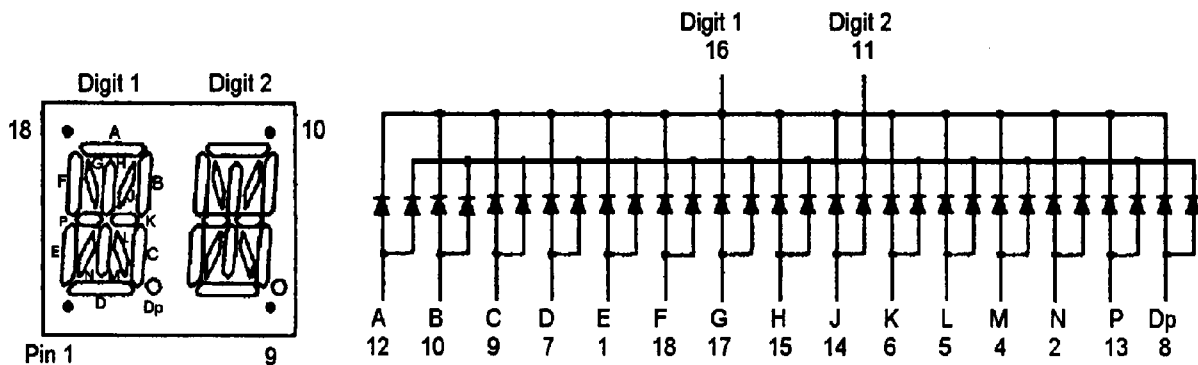



# 0.54 INCH (13.7MM) 14 SEGMENT, DUAL DIGIT ALPHA - NUMERIC STICK DISPLAY

## GRAPHICAL DETAIL: Bright Red ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

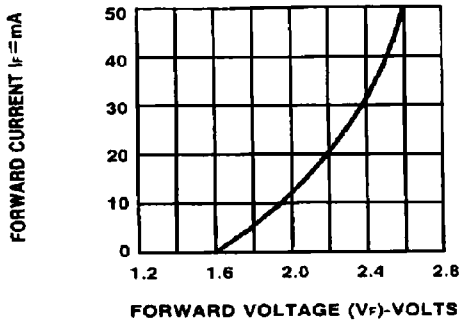


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

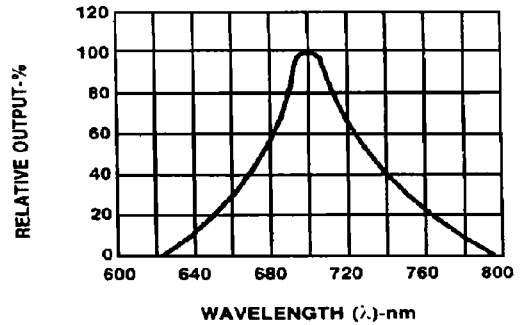


Fig.2 SPECTRAL RESPONSE

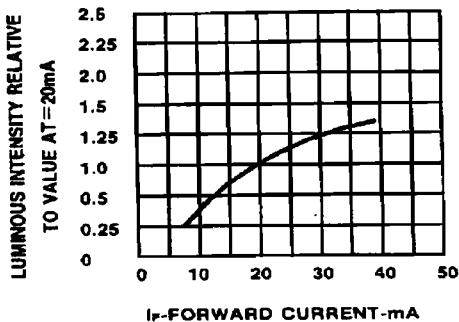


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

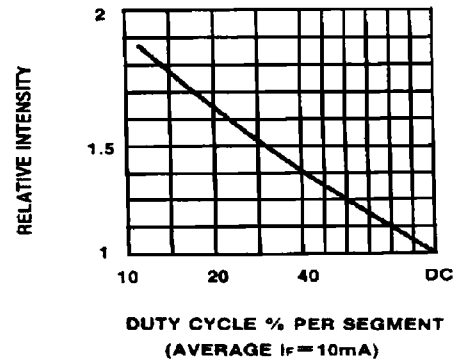


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

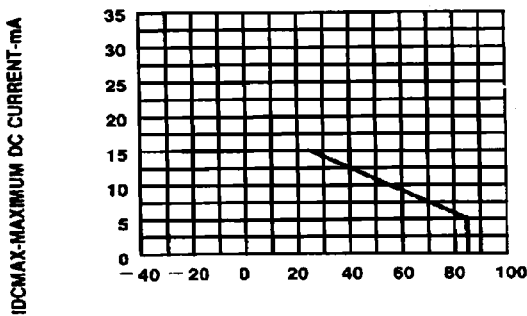


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE.

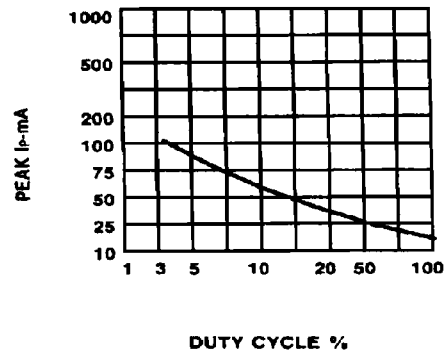


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE  $f = 1\text{ KHz}$ )



# 0.54 INCH (13.7MM) 14 SEGMENT, DUAL DIGIT ALPHA - NUMERIC STICK DISPLAY

## GRAPHICAL DETAIL: Green ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

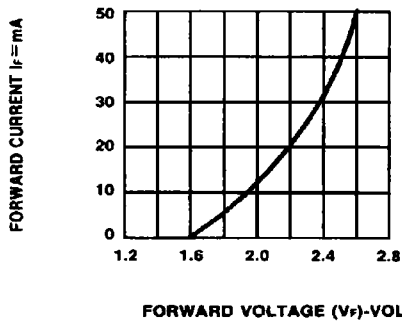


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

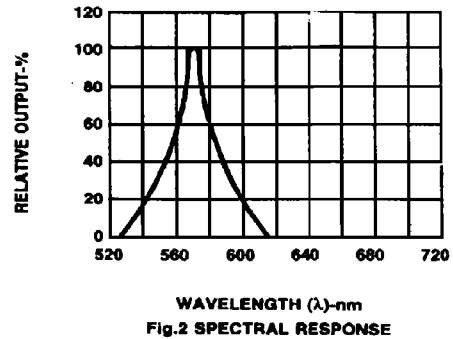


Fig.2 SPECTRAL RESPONSE

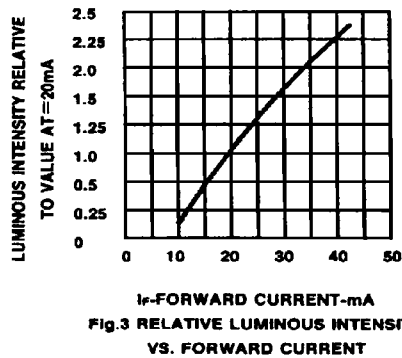


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

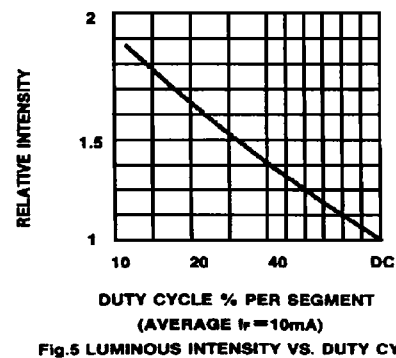


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

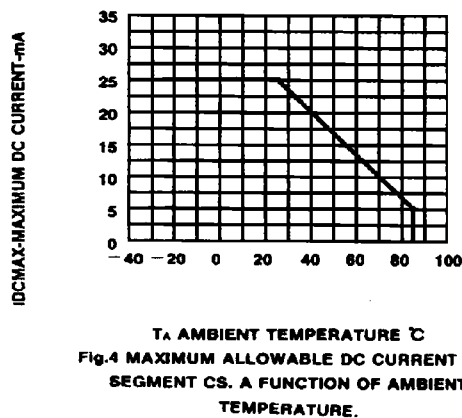


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT CS. A FUNCTION OF AMBIENT TEMPERATURE.

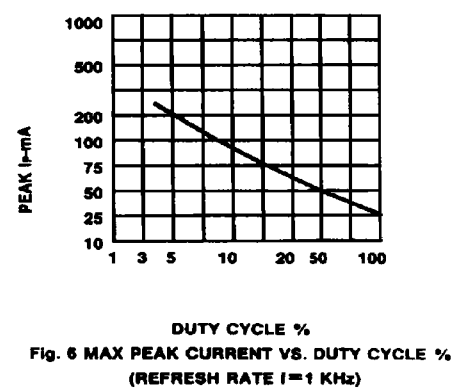


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE  $f = 1\text{ KHz}$ )



# 0.54 INCH (13.7MM) 14 SEGMENT, DUAL DIGIT ALPHA - NUMERIC STICK DISPLAY

## GRAPHICAL DETAIL: High Efficiency Red ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

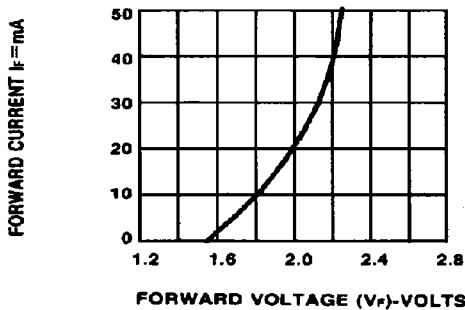


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

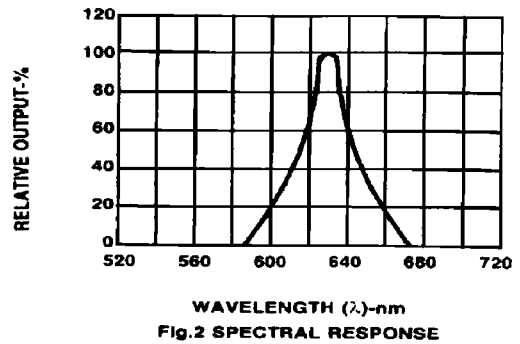


Fig.2 SPECTRAL RESPONSE

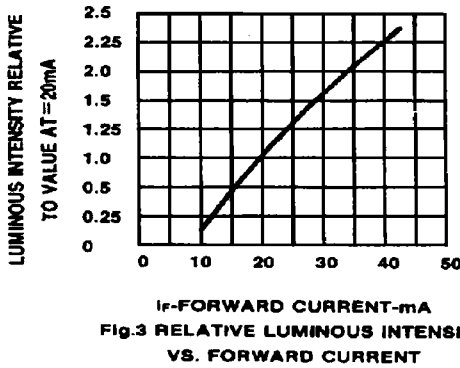


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

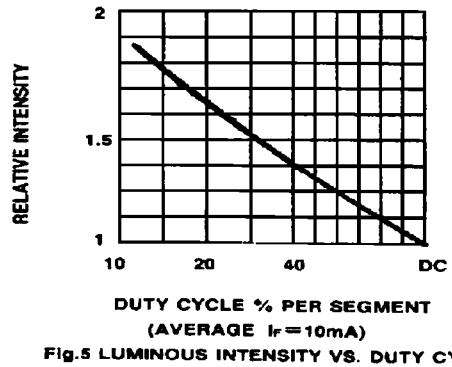


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

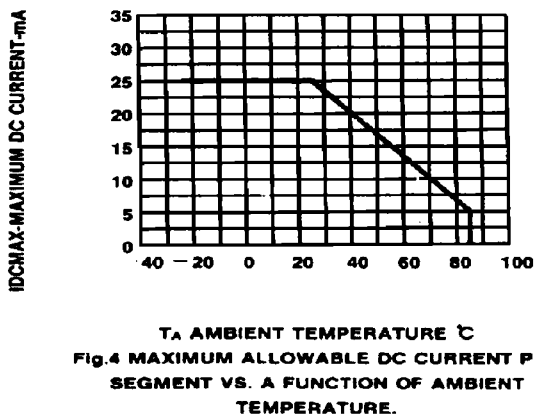


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE.

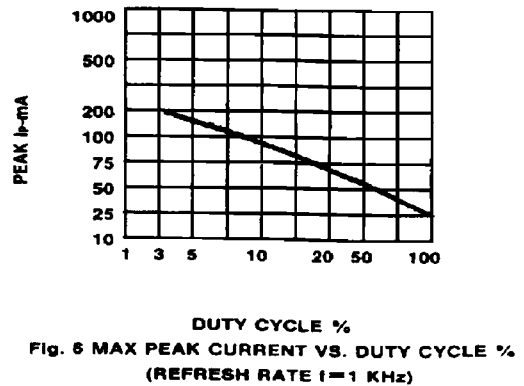


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE  $f = 1\text{ KHz}$ )



# 0.54 INCH (13.7MM) 14 SEGMENT, DUAL DIGIT ALPHA - NUMERIC STICK DISPLAY

## GRAPHICAL DETAIL: Yellow ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

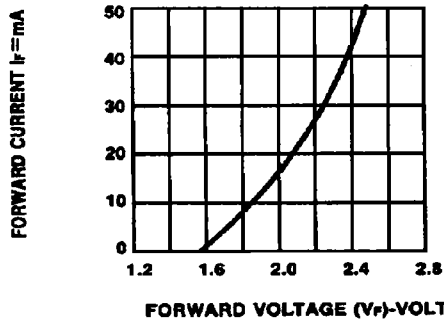


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

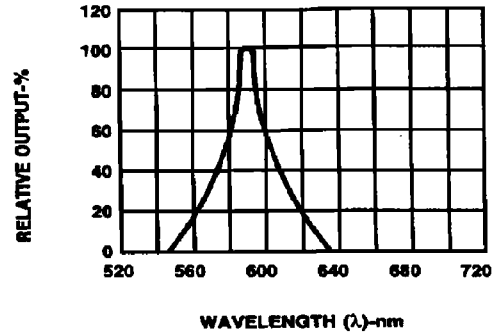


Fig.2 SPECTRAL RESPONSE

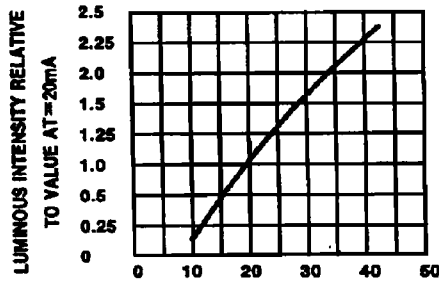


Fig.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

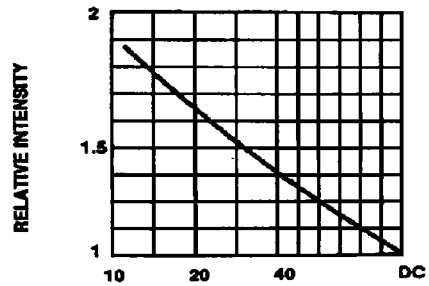


Fig.5 LUMINOUS INTENSITY VS. DUTY CYCLE

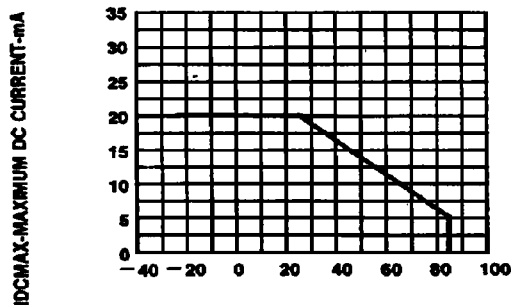


Fig.4 MAXIMUM ALLOWABLE DC CURRENT PER SEGMENT VS. A FUNCTION OF AMBIENT TEMPERATURE.

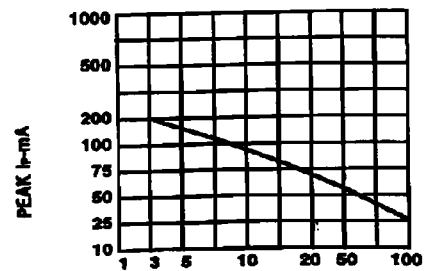


Fig.6 MAX PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE f = 1 KHz)