




DIMENSIONS mm (inches)

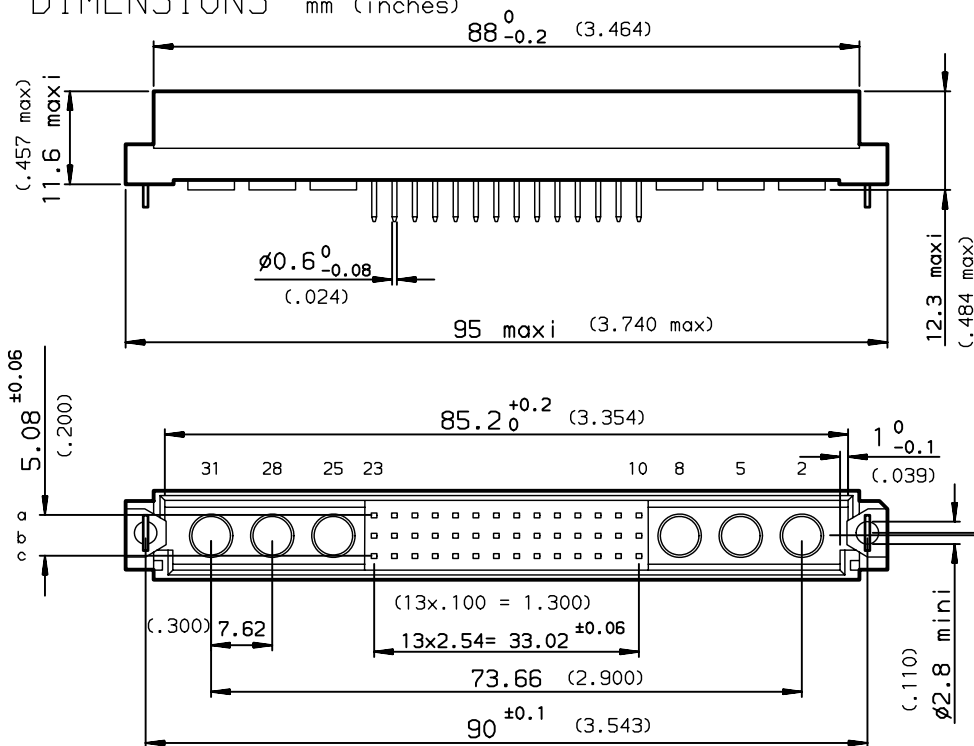

PCB DRILLING

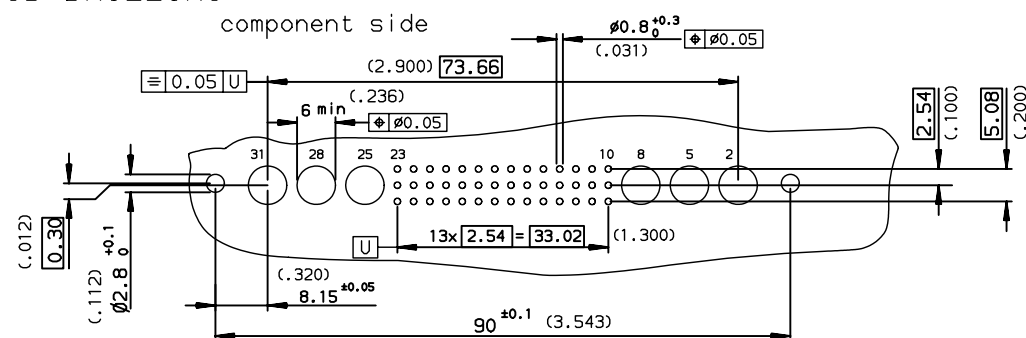

PART NUMBER		8609		E8		5	
PIN OUT		rows a-b-c		3		42	
		rows a-c		4		28	
NUMBER OF CONTACTS							
TERMINATION		L = 2.70 ±0.25 (.106)		: 24			
		L = 4.65 ±0.25 (.183)		: 14			
OPTIONS		no option				7	
		with harpoons				H	
						R	
PERFORMANCE CLASS		DIN 41612 class 3				4	
		DIN 41612 class 2				5	
		DIN 41612 class 1				6	
TERMINATION TYPE		TIN LEAD				000E1	
		LEAD FREE				E1LF	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C-8609-0000A

European Views

www.fciconnect.com		surface ISO 1302		tolerance std ISO 406 ISO 1101		projection mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	ROUILLARD	1996/02/22	ANGULAR	0.X	±0.1	size	Scale
Eng	TARON	1996/02/22	LINEAR	0.XX	±0.1	A3	1.5
Chr	LEGARE	1996/02/22	0.XX' ±2'	0.XXX	±0.1	ECN	LS06-0095
Appr	LEGARE	1996/02/22	Product family	DIN 8609	Spec ref		
FCI		title		STRAIGHT MALE WITH SPECIAL CONTACTS		Rev.	
		catalog no		SOLDER TO BOARD		C	
				C-8609-0506		sheet 1 of 1	

rev	ecn no	dr	date
A	-	-	1996/02/22
B	LS05-001	JTA	2005/03/02
C	LS06-0095	LGO	2006/06/26
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-