
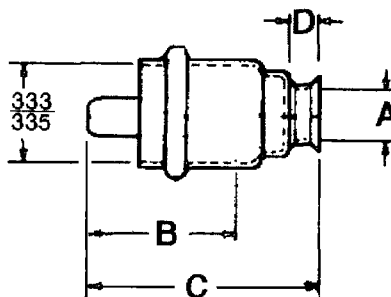


Positive Locking Phono Plugs



Part #	"A"	"B" Pin Length	"C"	"D"
PSL-126F-3-12	.126	3/8	11/16	3/32
PSL-126F-3-15	.126	15/32	49/64	3/32
PSL-126F-3-16	.126	1/2	13/16	3/32
PSL-126F-3-18	.126	9/16	7/8	3/32
PSL-126F-6-12	.126	3/8	25/32	3/16
PSL-126F-6-15	.126	15/32	7/8	3/16
PSL-126F-6-16	.126	1/2	27/32	3/16
PSL-126F-6-18	.126	9/16	31/32	3/16
PSL-126F-8-15	.130	15/32	15/16	17/64
PSL-156F-3-12	.156	3/8	11/16	3/32
PSL-156F-3-15	.156	15/32	13/16	3/32
PSL-156F-3-16	.156	1/2	13/16	3/32
PSL-156F-3-18	.156	9/16	57/64	3/32
PSL-156F-6-12	.156	3/8	25/32	3/16
PSL-156F-6-15	.156	15/32	7/8	3/16
PSL-156F-6-16	.156	1/2	57/64	3/16
PSL-156F-6-18	.156	9/16	31/32	3/16
PSL-176F-3-12	.176	3/8	23/32	3/32
PSL-176F-3-15	.176	15/32	25/32	3/32
PSL-176F-3-16	.176	1/2	13/16	3/32
PSL-176F-3-18	.176	9/16	57/64	3/32
PSL-176F-6-12	.176	3/8	25/32	3/16
PSL-176F-6-15	.176	15/32	7/8	3/16
PSL-176F-6-16	.176	1/2	57/64	3/16
PSL-176F-6-18	.176	9/16	31/32	3/16
PSL-225F-6-12	.225	3/8	25/32	3/16
PSL-225F-6-15	.225	15/32	53/64	3/16
PSL-225F-6-16	.225	1/2	57/64	3/16
PSL-225F-6-18	.225	9/16	59/64	3/16
PSL-225F-6-20	.225	5/8	63/64	3/16
PSL-225F-6-22	.225	11/16	1-3/32	3/16

"Product Facts"

- Patented Improved Design
- Initial Insertion 8# Maximum
- Positive Locking Retention
- Virtually Indestructible


"Materials and Plating"

The standard materials are Bright Tin Plated steel shells with .125" diameter Nickel plated pins. The insulation is low loss Phenolic material. Special plating and materials are available upon request.


Positive Locking Phono Plugs



Part #	"A"	"B" Pin Length	"C"
PSL-126-3-12L	.126	3/8	41/64
PSL-126-3-15L	.126	15/32	11/16
PSL-126-3-16L	.126	1/2	49/64
PSL-126-3-18L	.126	9/16	53/64
PSL-126-3-20L	.126	5/8	57/64
PSL-126-3-22L	.126	11/16	61/64

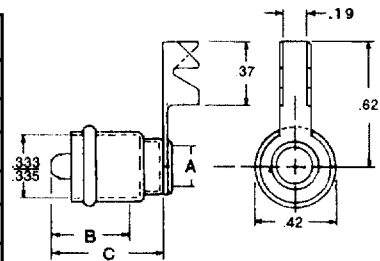


Part #	"A"	"B"	"C"
PSL-333-15	.333	25/32	9/64
PSL-333-15-2	.338	1-1/8	31/64



Where additional spacing is desired between conductors or special polarity is desired, these plugs are available with .093" diameter pins.




Part #	"A"	"B"	"C"
PSL-126F-3-093	.126	13/16	3/32
PSL-126F-6-093	.126	29/32	3/16
PSL-126F-8-093	.130	31/32	17/64
PSL-156F-3-093	.156	13/16	3/32
PSL-156F-6-093	.156	29/32	3/16
PSL-176F-3-093	.176	13/16	3/32
PSL-176F-6-093	.176	29/32	3/16
PSL-225F-6-093	.226	29/32	3/16



Special Applications

For applications where the wire is close in size to the I.D. of the pin, the weep hole allows for out gassing which speeds up the soldering process, while virtually eliminating bad solder joints. Field tests have shown a reduction of solder cycle time by as much as 50%.

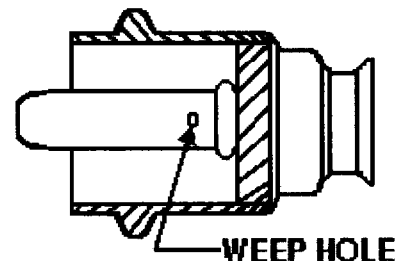

Ntt-Smith has been a manufacturer of phono plugs, phono jacks, and related components for over fifty years. Don't hesitate, give us a call. We welcome your special requirements.