

## **MARKETING SALES DRAWING**

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - [ ]

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.





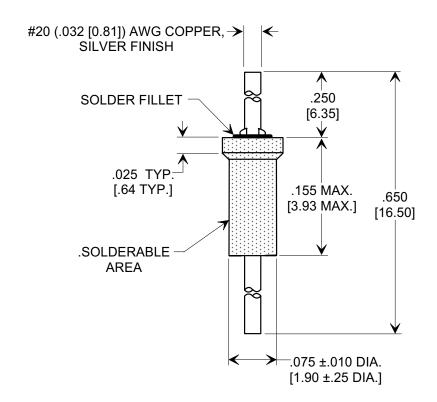

SPECIFICATIONS					
CAP. VALUE	1500 pF				
CAP. TOL.	+100, -0%				
TEMP. CHAR.	X5U				
OPERATING TEMP.	-55° TO +125°C				
OPERATING VOLT.	100 WVDC				

## NOTES:

- TUSONIX STANDARD PART NUMBER: 2463-002-X5U0-152P.
   TUSONIX RoHS COMPLIANT PART
   NUMBER: 2463-002-X5U0-152P LF.
   CUSTOMER MUST SPECIFY STANDARD OR RoHS PART
   NUMBER WHEN ORDERING.
- 2. PART MARKING: STANDARD PART, NO MARKING. RoHS PART: GREEN LABELING ON PACKAGING.

RD	03 0	VER 5	1		TOLERANCES Unless Otherwise Specified	SHOULDER FEED-THRU		
RECORD e 05-3-03 & SILVEI		SIL 20-0		DECIMAL ± .031 [.079]	FEED-IIIKU			
l z l g	330 g	ES & . 05-2	.02-; <b>-0-9</b>		ANGLES ± ////	Drawi	n S.M. 03-10-98	Scale NONE
VISIO	> _ oı _ ıv	504			Approved J.Mc. 03-10-98			
RE/ Original C.O. 1 ADDED	20050 20050	TUSONIX TUCSON, ARIZONA	Α	2463-002-X5	U0-152P			