

PCB Terminal Strips, Series 250

Pin Spacings 2.5 mm/0.098 in and 2.54 mm/0.1 in



Front-entry

Pin spacing 2.5 mm / 0.098 in
0.6 – 0.8 mm Ø "e" | AWG 22 – 20 "sol."
250 V/2.5 kV/2 | 300 V
2 A

8.5 – 9.5 mm / 0.35 in

Pin spacing 2.54 mm / 0.1 in
0.6 – 0.8 mm Ø "e" | AWG 22 – 20 "sol."
250 V/2.5 kV/2 | 300 V
2 A

8.5 – 9.5 mm / 0.35 in

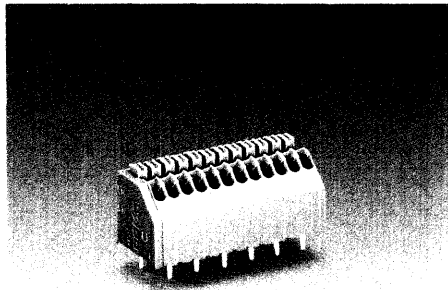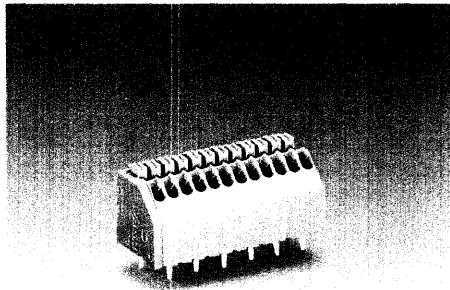

No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
1-conductor terminal strips with push button, 1 solder pin/pole staggered, grey, with test slot for test pin up to 1.3 mm Ø			1-conductor terminal strips with push button, 1 solder pin/pole staggered, grey, with test slot for test pin up to 1.3 mm Ø		
2	250-402	720 (4 x 180)	2	250-1402	720 (4 x 180)
3	250-403	520 (4 x 130)	3	250-1403	520 (4 x 130)
4	250-404	400 (4 x 100)	4	250-1404	400 (4 x 100)
5	250-405	340 (4 x 85)	5	250-1405	320 (4 x 80)
6	250-406	280 (4 x 70)	6	250-1406	280 (4 x 70)
7	250-407	240 (4 x 60)	7	250-1407	240 (4 x 60)
8	250-408	220 (4 x 55)	8	250-1408	200 (4 x 50)
9	250-409	180 (4 x 45)	9	250-1409	180 (4 x 45)
10	250-410	160 (4 x 40)	10	250-1410	160 (4 x 40)
11	250-411	160 (4 x 40)	11	250-1411	160 (4 x 40)
12	250-412	140 (4 x 35)	12	250-1412	140 (4 x 35)
13	250-413	140 (4 x 35)	13	250-1413	120 (4 x 30)
14	250-414	120 (4 x 30)	14	250-1414	120 (4 x 30)
15	250-415	120 (4 x 30)	15	250-1415	120 (4 x 30)
16	250-416	100 (4 x 25)	16	250-1416	100 (4 x 25)
:	:	:	:	:	:
20	250-420	80 (4 x 20)	20	250-1420	80 (4 x 20)
21	250-421	80 (4 x 20)	21	250-1421	80 (4 x 20)
22	250-422	80 (4 x 20)	22	250-1422	80 (4 x 20)
23	250-423	80 (4 x 20)	23	250-1423	60 (4 x 15)
24	250-424	60 (4 x 15)	24	250-1424	60 (4 x 15)


Additional item-Nos. for colored terminal strips
blue ... /000-006
orange ... /000-012

Ordering example
Term. strip, pin spacing 2.5 mm / 0.098 in, 8 poles, orange
1 solder pin staggered **250-408/000-012**


Accessories

Test pin, 1 mm / 0.039 in Ø
735-500 1
Test wire for sold. onto test plug


Test pin, 1 mm / 0.039 in Ø
735-500 1
Test wire for sold. onto test plug

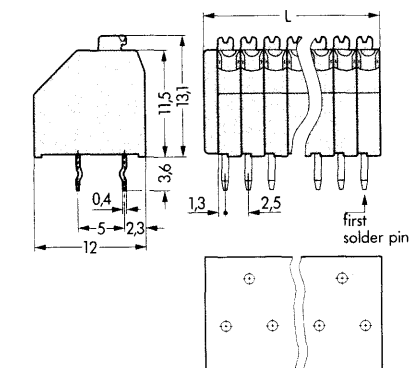


Diameter of drilled hole 1.1⁻⁰¹ mm
L = (No. of poles x pin spacing) + 1.5 mm

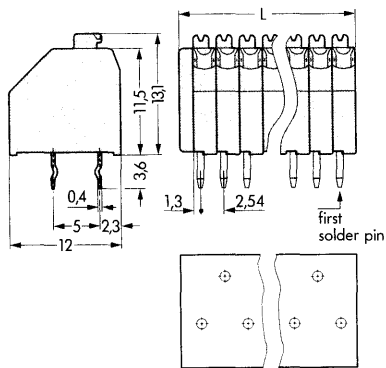

Diameter of drilled hole 1.1⁻⁰¹ mm
L = (No. of poles x pin spacing) + 1.5 mm

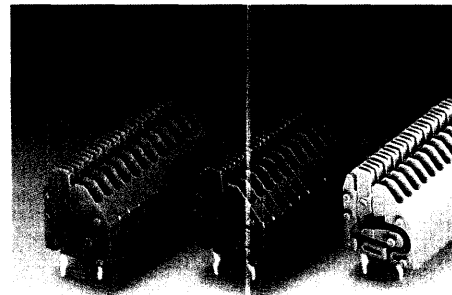


Terminal strips available in different colors

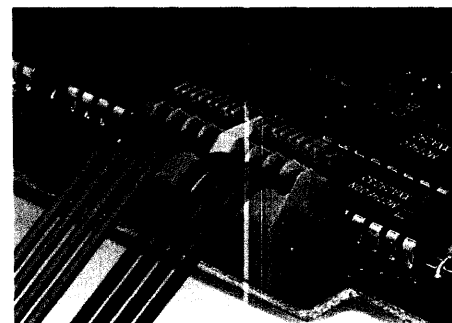

Terminal strip insulation housings mixed in different colors with/without spacer are available upon request

Pin spacing 2.5 mm Pin spacing 2.54 mm

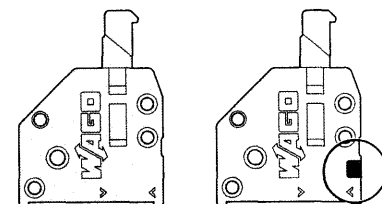

A groove at the back of the terminal block differentiates between the two pin spacings



The push-wire connection clamps solid copper wires