






Bulkhead and Panel Mount Female Contact Terminations (Field Replaceables)

Flange Mount Female Airsection Design Style




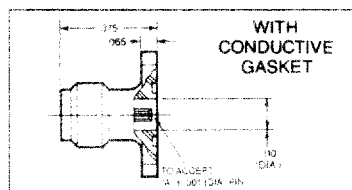


C.D.I. PART NO. WITH GASKET	C.D.I. PART NO. W/O GASKET	FLANGE SIZE	FIG
5601-	5674-	2 HOLE, .187 x .550	A
5685-	5681-	2 HOLE, .223 x .625	B
5935-	5923-	4 HOLE, .375 x .375	C
5715-	5717-	4 HOLE, .375 x .500	D
5684-	5680-	4 HOLE, .500 x .500	E



SELECT -1CC THRU -6CC SIZE FEMALE CONTACT
TO ACCEPT "A" DIAMETER PIN x 0.090 LONG

DASH NO.	-1CC	-2CC	-3CC	-4CC	-5CC	-6CC
"A" ± .001	.0360	.0200	.0100	.0120	.0150	.0180

Center connector is mechanically captivated



Flange Mount Male Airsection Design Style



C.D.I. PART NO. WITH GASKET	C.D.I. PART NO. W/O GASKET	FLANGE SIZE	FIG
5633-	5675-	2 HOLE, .187 x .550	A
5687-	5683-	2 HOLE, .223 x .625	B
5936-	5925-	4 HOLE, .375 x .375	C
5716-	5718-	4 HOLE, .375 x .500	D
5686-	5780-	4 HOLE, .500 x .500	E









SELECT -1CC THRU -6CC SIZE FEMALE CONTACT
TO ACCEPT "A" DIAMETER PIN x 0.090 LONG

DASH NO.	-1CC	-2CC	-3CC	-4CC	-5CC	-6CC
"A" ± .001	.0360	.0200	.0100	.0120	.0150	.0180

Center contact is mechanically captivated.

Bulkhead and Panel Mount Female Contact Terminations (Field Replaceables)

Flange Mount Female Flush Teflon Design Style

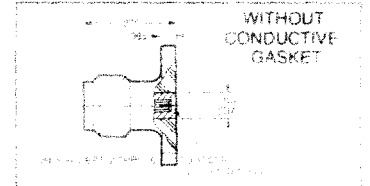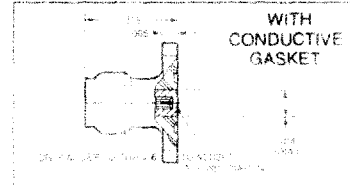






C.D.I. PART NO. WITH GASKET	C.D.I. PART NO. W/O GASKET	FLANGE SIZE	FIG.
5634-	5678-	2 HOLE .187 x .550	
5602-	5663-	2 HOLE .223 x .625	
5603-	5941-	4 HOLE .375 x .375	
5605-	5668-	4 HOLE .375 x .500	
5604-	5665-	4 HOLE .500 x .500	

SELECT -2CC THRU -6CC SIZE FEMALE CONTACT
TO ACCEPT 'A' DIAMETER PIN x 0.090 LONG

DASH NO.	-2CC	-3CC	-4CC	-5CC	-6CC
'A' ± .001	.0200	.0100	.0120	.0150	.0180

Center contact is mechanically captivated

Flange Mount Male Flush Teflon Design Style

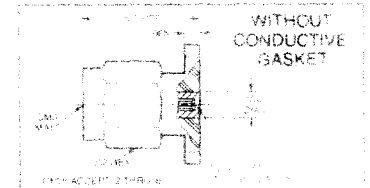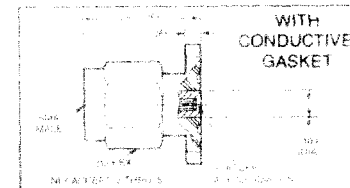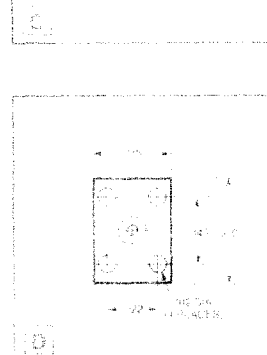

C.D.I. PART NO. WITH GASKET	C.D.I. PART NO. W/O GASKET	FLANGE SIZE	FIG.
5635-	5679-	2 HOLE .187 x .550	
5606-	5664-	2 HOLE .223 x .625	
5607-	5942-	4 HOLE .375 x .375	
5609-	5669-	4 HOLE .375 x .500	
5608-	5666-	4 HOLE .500 x .500	


SELECT -2CC THRU -6CC SIZE FEMALE CONTACT
TO ACCEPT 'A' DIAMETER PIN x 0.090 LONG

DASH NO.	-2CC	-3CC	-4CC	-5CC	-6CC
'A' ± .001	.0200	.0100	.0120	.0150	.0180

Center contact is mechanically captivated








Bulkhead and Panel Mount Female Contact Terminations (Field Replaceables)

Flange Mount Female Flush Teflon Design Style

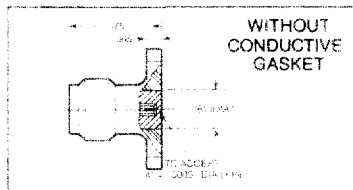


C.D.I. PART NO. WITH GASKET	C.D.I. PART NO. W/O GASKET	FLANGE SIZE	FIG			
NOT AVAILABLE	NOT AVAILABLE	2 HOLE, .187 x .550	A			
NOT AVAILABLE	5981-	2 HOLE, .223 x .625	B			
NOT AVAILABLE	5937-	4 HOLE, .375 x .375	C			
NOT AVAILABLE	5734-	4 HOLE, .375 x .500	D			
NOT AVAILABLE	5980-	4 HOLE, .500 x .500	E			
SELECT -1CC THRU -6CC SIZE FEMALE CONTACT TO ACCEPT "A" DIAMETER PIN x 0.090 LONG						
DASH NO.	-1CC	-2CC	-3CC	-4CC	-5CC	-6CC
A ± .001	.0360	.0200	.0100	.0120	.0150	.0180

Center contact is epoxy captivated.



Flange Mount Male Flush Teflon Design Style

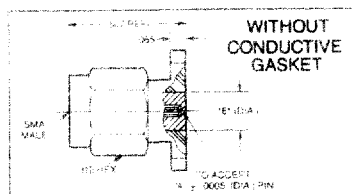

C.D.I. PART NO. WITH GASKET	C.D.I. PART NO. W/O GASKET	FLANGE SIZE	FIG.			
NOT AVAILABLE	NOT AVAILABLE	2 HOLE, .187 x .550	A			
NOT AVAILABLE	5983-	2 HOLE, .223 x .625	B			
NOT AVAILABLE	5938-	4 HOLE .375 x .375	C			
NOT AVAILABLE	5714-	4 HOLE, .375 x .500	D			
NOT AVAILABLE	5982-	4 HOLE, .500 x .500	E			
SELECT -1CC THRU -6CC SIZE FEMALE CONTACT TO ACCEPT "A" DIAMETER PIN x 0.090 LONG						
DASH NO.	-1CC	-2CC	-3CC	-4CC	-5CC	-6CC
A ± .001	.0360	.0200	.0100	.0120	.0150	.0180

Center connector is epoxy captivated.