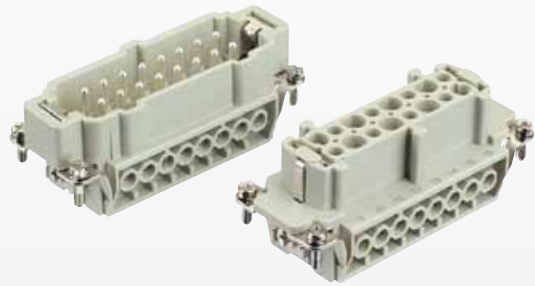
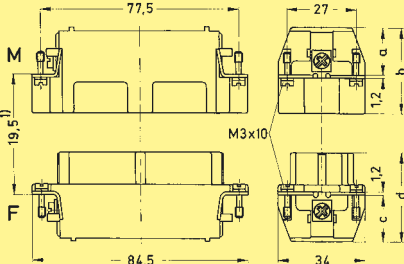






Number of contacts

16 +


Inserts

Han
E/EE

		Part No.																							
Identification	Series	Male insert (M)	Female insert (F)	Drawing	Dimensions in mm																				
Screw terminal with wire protection	Han E®	09 33 016 2601	09 33 016 2701																						
Cage-clamp terminal	Han® ES	09 33 016 2616	09 33 016 2716	1) Distance for contact max. 21 mm																					
Cage-clamp terminal two terminals per contact	Han® ESS	09 33 016 2672	09 33 016 2772	<table border="1"><thead><tr><th></th><th>a</th><th>b</th><th>c</th><th>d</th></tr></thead><tbody><tr><td>Han E® screw</td><td>18</td><td>33</td><td>18</td><td>35</td></tr><tr><td>Han® ES / Han E® crimp</td><td>19</td><td>34</td><td>19</td><td>36</td></tr><tr><td>Han ESS</td><td>34</td><td>49</td><td>32</td><td>49</td></tr></tbody></table>			a	b	c	d	Han E® screw	18	33	18	35	Han® ES / Han E® crimp	19	34	19	36	Han ESS	34	49	32	49
	a	b	c	d																					
Han E® screw	18	33	18	35																					
Han® ES / Han E® crimp	19	34	19	36																					
Han ESS	34	49	32	49																					
Crimp terminal Order contacts separately	Han E®	09 33 016 2602	09 33 016 2702	Contact arrangement View from termination side  Panel cut out for inserts for use without hoods/housings 																					

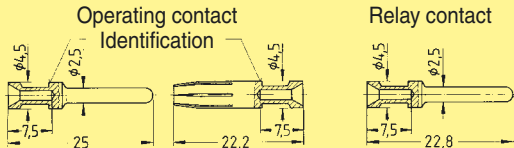Wire gauge		Part No.			
Identification	(mm²)	Male contacts	Female contacts	Drawing	Dimensions in mm
Crimp contacts	0.14-0.37	09 33 000 6127*	09 33 000 6227*	Operating contact Identification Relay contact 	
Power contacts	0.5	09 33 000 6121	09 33 000 6220		
silver plated	0.75	09 33 000 6114	09 33 000 6214		
	1.0	09 33 000 6105	09 33 000 6205		
	1.5	09 33 000 6104	09 33 000 6204		
	2.5	09 33 000 6102	09 33 000 6202		
	3	09 33 000 6106	09 33 000 6206		
	4	09 33 000 6107	09 33 000 6207		
gold plated	0.14-0.37	09 33 000 6117*	09 33 000 6217*		
	0.5	09 33 000 6122	09 33 000 6222		
	0.75	09 33 000 6115	09 33 000 6215		
	1.0	09 33 000 6118	09 33 000 6218		
	1.5	09 33 000 6116	09 33 000 6216		
	2.5	09 33 000 6123	09 33 000 6223		
	4.0	09 33 000 6119	09 33 000 6221		
Relay contact silver plated	0.75-1	09 33 000 6109			
	1.5	09 33 000 6110			
	2.5	09 33 000 6111			
Coding Pin			09 33 000 9954	To avoid accidental incorrect mating of adjacent connectors a coding system is required. Coding is effected – by means of a code pin. For this reason a female contact has to be inserted into the selected chamber. The code pin has to be assembled into this contact from the mating side. The opposite male contact is omitted. 	

* only to be used with BUCHANAN crimping tool 09 99 000 0001 and adjustment gauge 09 99 000 0203

Stock items in bold type